
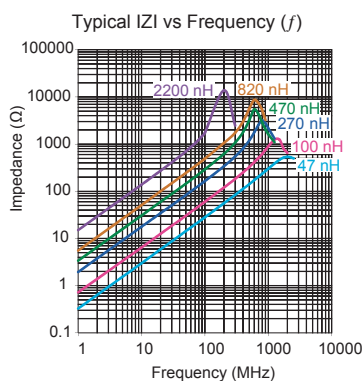
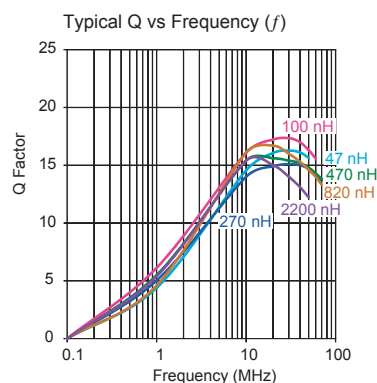
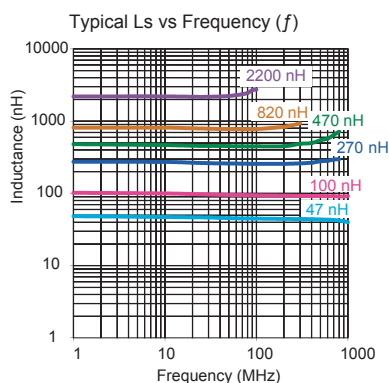
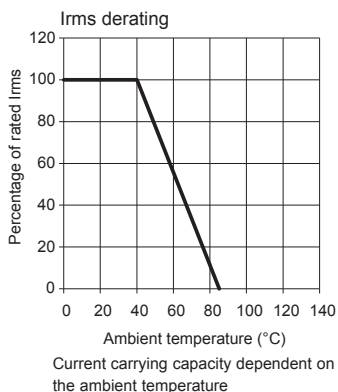





0603 F

Engineer's Kit : EK-0603F-X



Single layer (typ)

Part No	Inductance L (nH)	fL (MHz)	Tol ± (%)	Q min	fα (MHz)	SRF (MHz)	DCR max (Ω)	Rated DC Current (A)
0603F-047K-YY	47	7.9	10	12	7.9	1500 min	0.075	1.40
0603F-072K-YY	72	7.9	10	12	7.9	1400 min	0.12	1.40
0603F-R10K-YY	100	7.9	10	12	7.9	1150 min	0.13	1.40
0603F-R12K-YY	120	7.9	10	12	7.9	1100 min	0.15	1.40
0603F-R15K-YY	150	7.9	10	12	7.9	1050 min	0.15	1.30
0603F-R18K-YY	180	7.9	10	12	7.9	950 min	0.15	1.30
0603F-R22K-YY	220	7.9	10	12	7.9	800 min	0.16	0.95
0603F-R24K-YY	240	7.9	10	12	7.9	800 min	0.16	0.95
0603F-R27K-YY	270	7.9	10	12	7.9	775 min	0.30	0.71
0603F-R33K-YY	330	7.9	10	12	7.9	725 min	0.46	0.56
0603F-R39K-YY	390	7.9	10	12	7.9	620 min	0.51	0.50
0603F-R47K-YY	470	7.9	10	12	7.9	540 min	0.62	0.42
0603F-R56K-YY	560	7.9	10	12	7.9	525 min	0.44	0.55
0603F-R68K-YY	680	7.9	10	12	7.9	260 min	0.52	0.47
0603F-R78K-YY	780	7.9	10	12	7.9	460 min	0.69	0.39
0603F-R82K-YY	820	7.9	10	12	7.9	410 min	0.83	0.40
0603F-1R0K-YY	1000	7.9	10	12	7.9	280 min	1.10	0.40
0603F-1R2K-YY	1200	7.9	10	12	7.9	230 min	1.70	0.35
0603F-1R5K-YY	1500	7.9	10	12	7.9	230 min	1.70	0.35
0603F-1R8K-YY	1800	7.9	10	12	7.9	170 typ	1.85	0.35
0603F-2R2K-YY	2200	7.9	10	12	7.9	140 typ	2.00	0.32

Core Material : Ferrite

Revision date : 03 Sep 2020

SPQ : Taped / Reel 1000 [-08]
4000 [-01]
15000 [-04]

Remarks: - Unlisted inductance values available upon request.
- 2% and 5% tolerance available upon request.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Fastron:

[0603F-1R0K-08](#) [0603F-R10K-08](#) [0603F-072K-08](#) [0603F-R47K-08](#) [0603F-R12K-08](#) [0603F-R15K-08](#) [0603F-R22K-08](#) [0603F-1R5K-08](#) [0603F-047K-08](#) [0603F-R56K-08](#) [0603F-R68K-08](#) [0603F-1R8K-08](#) [0603F-R27K-08](#) [0603F-R39K-08](#) [0603F-2R2K-08](#) [0603F-R33K-08](#) [0603F-R24K-08](#) [0603F-R18K-08](#) [0603F-R82K-08](#) [0603F-R39K-01](#) [0603F-R10J-04](#) [0603F-R22K-01](#) [0603F-R15J-08](#) [0603F-R78J-08](#) [0603F-R10G-04](#) [0603F-R15J-01](#) [0603F-1R8J-04](#) [0603F-1R2J-04](#) [0603F-R39K-04](#) [0603F-R27K-01](#) [0603F-1R2G-04](#) [0603F-1R2G-08](#) [0603F-R47J-01](#) [0603F-R78G-08](#) [0603F-R68J-04](#) [0603F-R15K-04](#) [0603F-R12J-01](#) [0603F-R82K-04](#) [0603F-R82J-08](#) [0603F-R68G-04](#) [0603F-1R5J-04](#) [0603F-047J-01](#) [0603F-R10G-01](#) [0603F-R82G-08](#) [0603F-R56J-01](#) [0603F-1R5K-04](#) [0603F-R10K-01](#) [0603F-R27G-04](#) [0603F-1R0G-04](#) [0603F-R24K-01](#) [0603F-R12G-01](#) [0603F-1R2J-08](#) [0603F-R68K-01](#) [0603F-R47G-01](#) [0603F-1R0J-04](#) [0603F-R68K-04](#) [0603F-R12J-04](#) [0603F-1R0K-04](#) [0603F-R22G-01](#) [0603F-R39G-08](#) [0603F-047K-01](#) [0603F-R10J-08](#) [0603F-1R8K-04](#) [0603F-R24J-01](#) [0603F-072G-04](#) [0603F-R27J-04](#) [0603F-R47J-08](#) [0603F-047J-08](#) [0603F-2R2G-08](#) [0603F-R27G-01](#) [0603F-R18K-04](#) [0603F-R18J-04](#) [0603F-R78G-04](#) [0603F-R56K-01](#) [0603F-R10J-01](#) [0603F-1R2K-04](#) [0603F-R12K-04](#) [0603F-2R2G-01](#) [0603F-047G-08](#) [0603F-1R0K-01](#) [0603F-R47G-08](#) [0603F-072K-01](#) [0603F-R22J-08](#) [0603F-R15J-04](#) [0603F-R33G-04](#) [0603F-2R2J-08](#) [0603F-1R8G-04](#) [0603F-R39J-04](#) [0603F-R27J-01](#) [0603F-R47K-04](#) [0603F-1R5G-01](#) [0603F-1R8J-08](#) [0603F-R24G-01](#) [0603F-R22J-01](#) [0603F-047G-01](#) [0603F-1R8G-08](#) [0603F-R39J-08](#) [0603F-R68J-01](#) [0603F-R27K-04](#) [0603F-R33G-01](#)