

ScopeMeter® 190C, 190B, and 120 Series

ScopeMeter 190C and 190B Series: Speed, performance and analysis power

For demanding applications, the ScopeMeter 190C and 190B Series high-performance oscilloscopes offer specifications usually found on top-end bench instruments. With up to 200 MHz bandwidth, 2.5 GS/s real time sampling and a deep memory of 27,500 points per input, they're ideal for engineers who need the full capabilities of a high-performance scope in a handheld, battery powered instrument.

- Dual input - 200, 100 or 60 MHz bandwidth
- Up to 2.5 GS/s real time sampling per input



Connect
and
View

- High waveform resolution of 3000 datapoints per channel
- Frequency Spectrum using FFT analysis (190C)
- Connect-and-View™ automatic triggering, a full range of manual trigger modes plus external triggering
- Digital Persistence for analyzing complex, dynamic signals like on an analog oscilloscope (190C)
- Fast display update rate for seeing dynamic behavior instantaneously
- Automatic capture and replay of 100 screens
- 27,500 points and more per input record length using ScopeRecord™ mode

Technical Data

- 1,000 V CAT II and 600 V CAT III safety certified
- Up to 1,000 V independently floating isolated inputs
- Four hours rechargeable NiMH battery pack

ScopeMeter 120 Series: Three-in-one simplicity

The compact ScopeMeter 120 Series is the rugged solution for industrial troubleshooting and installation applications. It's a truly integrated test tool, with oscilloscope, multimeter and "paperless" recorder in one affordable, easy-to-use instrument. Find fast answers to problems in machinery, instrumentation, control and power systems.

- A dual input 40 MHz or 20 MHz digital oscilloscope
- Two 5,000 counts true-rms digital multimeters
- Cursor measurements (Fluke 124, 125)
- A dual input TrendPlot recorder
- Connect-and-View trigger simplicity for hands-off operation
- Shielded test leads for oscilloscope, resistance, continuity and capacitance measurements
- Full bandwidth, VPS40 10:1 40 MHz probe included standard with Fluke 124, 125
- Up to seven hours battery operation
- 600 V CAT III safety certified
- Optically isolated RS-232 interface
- Rugged, compact case
- Bus Health test for industrial bus systems (Fluke 125)
- Power measurements and harmonics measurement (Fluke 125)

Now including the **NEW** ScopeMeter 125



Technical specifications 190C and 190B Series

Oscilloscope mode

Vertical deflection

	Fluke 199C Fluke 199B	Fluke 196C Fluke 196B	Fluke 192B
Bandwidth	200 MHz	100 MHz	60 MHz
Rise time	1.7 ns	3.5 ns	5.8 ns

Bandwidth limiter: User selectable: 10 kHz, 20 MHz or off

Number of inputs: Two plus external trigger.

All inputs isolated from each other and ground.

Input coupling: AC or DC, with ground level indicator

Input sensitivity: 2 mV/div to 100 V/div (Fluke 190C Series); 5 mV/div to 100 V/div (Fluke 190B Series)

Normal/invert: On both input channels; switched separately

Variable attenuator: Variable gain on input channel A

Input voltage: 1000 V CAT II, 600 V CAT III rated—see

“general specifications” for further details

Vertical resolution: 8 bit

Accuracy: $\pm (1.5 \% \text{ of reading} + 0.04 \times \text{range/div})$

Input impedance: $1 \text{ M}\Omega \pm 1 \% // 15 \text{ pF} \pm 2 \text{ pF}$

Horizontal

	Fluke 199C Fluke 199B	Fluke 196C Fluke 196B	Fluke 192B
Maximum real-time sample rate	2.5 GS/s	1 GS/s	500 MS/s
Number of digitizers	2	2	2
Time base range	5 ns/div to 5 s/div		10 ns/div to 5 s/div

Maximum record length: 3000 points per input in Scope mode; 27,500 points per input in ScopeRecord™ roll mode (5 ms/div to 2 min/div)

Accuracy: $\pm (0.01 \% \text{ of reading} + 1 \text{ pixel})$

Glitch capture: 50 nsec (at 5 μ sec/div to 1 min/div); 250 nsec (at 2 min/div)

Display and acquisition

	Fluke 190C	Fluke 190B
Display	144 mm Full color LCD	144 mm Monochrome LCD
Display modes	Input A, input B, dual, average, replay	
Persistence modes	Digital persistence: short/medium/long/infinite	Persistence on / off

Visible screen width: 12 divisions

Waveform mathematics: A + B, A - B, A * B, all with user selectable scaling of resultant; A versus B (X - Y mode); Frequency Spectrum using FFT analysis (190C only)

Acquisition modes: Normal, auto, single shot, ScopeRecord™ roll, glitch capture, waveform compare, waveform compare with automatic “Pass / Fail testing” (in 199C and 196C only)

Trigger and delay

Source: Input A, input B, external trigger input. All input references isolated from each other and from ground

Modes: Automatic Connect-and-View™ free run, single shot, edge, delay, video, video line, selectable pulsewidth, dual slope (190C only), N-cycle (190C only)

Connect-and-View™: Advanced automatic triggering that recognizes signal patterns, automatically sets up and continuously adjusts triggering, time base and amplitude. Automatically displays stable waveforms of complex and dynamic signals like motor drive and control signals.

Video triggering: NTSC, PAL, PAL+, SECAM. Includes field 1, field 2 and line select.

Pulse width triggering: Pulse width qualified by time. Allows for triggering $<t$, $>t$, $=t$, $\neq t$, where t is selectable in minimal steps of 0.01 div. or 50 nsec.

Time delay: One full screen of pre-trigger view or up to 100 screens (= 1200 divisions) of post-trigger delay

Dual slope triggering: Both rising and falling transitions, when crossing the trigger level, initiate an acquisition (190C only)

N-cycle triggering: Triggers on N-th occurrence of a trigger event; N to be set in the range 2 to 99 (190C only)

Automatic capture of 100 screens

The instrument ALWAYS memorizes the last 100 screens (no user setup required). When an anomaly occurs on screen, the REPLAY button can be pressed to review the full screen sequence over and over.

Instrument can be set up for triggering on glitches or intermittent anomalies and will operate in “baby-sit” mode and will capture 100 events.

Alternatively, the 199C and 196C can be set up in waveform compare mode to store only matching (“Pass”) or only non-matching (“Fail”) acquired waveforms in the replay memory bank for further analysis.

Replay: Manual or continuous replay. Displays the captured 100 screens as a “live” animation or under manual control. Each screen has date- and time-stamp.

Replay storage: Up to 2 sets of 100 screens each can be saved for later recall and analysis

FFT – Frequency Spectrum Analysis (190C only)

Shows frequency content of oscilloscope waveform using Fast Fourier Transform

Window: Automatic, Hamming, Hanning or None

Automatic window: Digitally re-samples acquired waveform to get optimum frequency resolution in FFT resultant

Vertical scale: Linear/logarithmic, in volts

Frequency axis: Logarithmic; frequency range automatically set as function of timebase range of oscilloscope

Waveform compare and pass/fail testing

Waveform compare: Provides storage and display of a reference waveform for visual comparison with newly acquired waveforms. Reference is derived from an acquired waveform and can be modified in the ScopeMeter or externally using FlukeView® Software.

Pass/Fail Testing (199C, 196C): In waveform compare mode, the Color Scopemeter can be set up to store only matching (“Pass”) or only non-matching (“Fail”) acquired waveforms in the replay memory bank for further analysis.

Automatic scope measurements

Vdc, Vac rms, Vac+dc, Vpeak max, Vpeak min, Vpeak to peak, Aac, Adc, Aac+dc, frequency (Hz), risetime, fall-time, power factor, Watts, VA, VA reactive, phase, pulse width (pos/neg), dutycycle (pos/neg), temperature °C, temperature °F, dBV, dBm into 50 Ω and 600 Ω

Vpwm ac, Vpwm ac+dc for measurement on pulse width modulated motordrives and frequency inverters

Cursor measurements

Source: Input A, input B or the mathematical result trace (excluding A vs B curve)

Dual horizontal lines: Voltage at cursor 1 and 2, voltage between cursors

Dual vertical lines: Time between cursors, 1/T between cursors (in Hz), voltage between markers, risetime with markers, falltime with markers; Vrms between cursors (190C only), watts between cursors (190C only)

Single vertical line: Min-Max and Average voltage at cursor position; frequency and rms-value of individual frequency component in FFT result (190C only)

Zoom

Up to 16x horizontal zoom

Recorder mode

ScopeRecord – roll mode

Dual input waveform storage mode

Source and display: Input A, input B, dual

Memory depth: 27,500 points per input. Each point consists of Min-Max pair

Min-Max values: Min-Max values are measured at high sample rates ensuring capture and display of glitches

Time base range	5 ms/div to 1 min/div	2 min/div
Recorded timespan	6 sec to 24 hr	48 hr
Glitch capture	50 ns	250 ns
Sample rate	20 MS/s	4 MS/s
Resolution	200 µsec to 2 sec	4.8 sec

Recording modes: Single sweep, continuous roll, Start-on-Trigger, Stop-on-Trigger

Stop-on-Trigger (through external): ScopeRecord mode can be stopped by an individual trigger event, or by an interruption of a repetitive trigger signal

Horizontal scale: Time from start, time of day

Zoom: Up to 100x

Memory: Up to 2 dual input ScopeRecord waveforms can be saved for later recall and analysis

TrendPlot™ recording

Single or dual input electronic paperless chart recorder. Plots, displays and stores meter and scope measurements.

Source and display: Input A, input B or DMM input

Memory depth: 18,000 points recording. Per record point a minimum, a maximum and an average value, plus a date and timestamp are recorded.

Ranges: 5 s/div to 30 min/div in normal view mode; 5 min/div to 48 hr/div in view all mode, giving overview of total record

Recorded timespan: Up to 22 days with a resolution of 1 minute

Recording mode: Continuous roll for the duration of the full recordable timespan

Measurement speed: 5 measurements per second

Horizontal scale: Time from start, time of day

Zoom: Up to 64x zoom

Memory: Up to 2 TrendPlot recordings can be saved for later recall and analysis

Cursor measurements – all recorder modes

Source: Input A, B or DMM input

Dual vertical lines: Min-Max or Average voltage. Time between cursors

Single vertical line: Min-Max or Average voltage. Absolute date and time or time from start

Meter mode

Via 4 mm banana inputs. Fully isolated from scope inputs and scope ground. The specified accuracy is valid over the temperature range 18 °C to 28 °C (65 °F to 82 °F). Add 10 % of specified accuracy for each degree C below 18 °C or above 28 °C.

Maximum resolution: 5,000 counts

Voltmeter ranges: 500 mV, 5 V, 50 V, 500 V, 1,000 V

Accuracy:

Vdc ± (0.5 % + 5 counts)

Vac true rms

15 Hz to 60 Hz: ± (1 % + 10 counts)

60 Hz to 1 kHz: ± (2.5 % + 15 counts)

Vac+dc true rms

dc to 60 Hz: ± (1 % + 10 counts)

60 Hz to 1 kHz: ± (2.5 % + 15 counts)

Ohms:

Ranges: 500 Ω, 5 kΩ, 50 kΩ, 500 kΩ, 5 MΩ, 30 MΩ

Accuracy: ± (0.6 % + 5 counts)

Other meter functions

Continuity: Beeper on < 50 Ω (± 30 Ω)

Diode test: Up to 2.8 V

Amps: Adc, Aac, Aac+dc using an optional current clamp or shunt. Scaling factors: 0.1 mV/A ... 100 V/A

Temperature (°C, °F): With optional accessories. Scale factors 1 mV/°C or 1 mV/°F

Input impedance: 1 MΩ ± 1 % // 10 pF ± 2 pF

Advanced meter functions: Auto/manual ranging, relative measurements (zero reference), TrendPlot recording

General specifications

Memory save and recall

Scope memories: 10 memory locations that each can contain two waveforms plus corresponding setup

Recorder memories: 2 memory locations that each can contain 100 captured dual input scope screens, or a dual input ScopeRecord (27,500 Min-Max pairs per input), or a dual input Trendplot (18,000 min-max pairs + average values)

Real-time clock

Time and date stamp for ScopeRecord, 100 captured screens and TrendPlots

Mechanical data

Size: 256 x 169 x 64 mm (10.1 x 6.6 x 2.5 in)

Weight: 2 kg (4.4 lbs)

Case

Design: Rugged, shock proof with integrated protective holster

Drip and dust proof: IP51 according to IEC529

Shock and vibration: Shock 30 g, vibration

	Fluke 190C	Fluke 190B
Display	Bright full-color LCD with backlight,	Bright LCD with backlight
Brightness	80 Cd/m ² typ. using power adapter	125 Cd/m ² typ. using power adapter

(sinusoidal) 3 g according to MIL-PRF-28800F Class 2

Display size: 115.2 mm x 86.4 mm (4.54 in x 3.4 in)

Resolution: 320 x 240 pixels

Contrast and brightness: User adjustable, temperature compensated

Power

Line power: Country-specific line voltage adapter/battery charger included

Battery power: Rechargeable NiMH (installed)

Battery operating time: 4 hours

Battery charging time: 4 hours

Battery power saving functions: Auto power down with adjustable power down time. On-screen battery status indicator.

Safety

Compliance:

EN61010-1-2001, Pollution degree 2;

UL 3111-1, with approval;

CAN/CSA C22.2, No. 61010-1-04, with approval;

ANSI/ISA-82.02.01

Input voltage ratings

Maximum probe voltage: 1000 V CAT II/600 V CAT III (Maximum voltage between 10:1 probe tip [VPS200] and reference lead)

Floating voltage: 1000 V CAT II/600 V CAT III (Maximum voltage between earth ground and any terminal [signal input or shielding])

Independently isolated inputs:

1000 V CAT II/600 V CAT III

(Maximum voltage between any terminal of one input or probe [VPS200] and any other terminal of another input or probe [VPS200])

Maximum voltage on BNC input directly

(input A or B): 300 V CAT III

Maximum voltage on meter input:

1,000 V CAT II/600 V CAT III

Environmental

Operating temperature: 0 °C to +50 °C

Storage temperature: -20 °C to +60 °C

Humidity:

10 °C to 30 °C: 95% RH non condensing

30 °C to 40 °C: 75% RH non condensing

40 °C to 50 °C: 45% RH non condensing

Maximum operating altitude: 3,000 m (10,000 feet)

Maximum storage altitude: 12 km (40,000 feet)

Electro-Magnetic-Compatibility (EMC): EN 61326-1 for emission and immunity

Optically-isolated PC/printer interface

PC communication: Transfer instrument settings, screen images, waveform data and waveform references, compatible with FlukeView® software for Windows® via optional PM9080.

To printer: Supports HP Laserjet®, DeskJet, Epson FX/LQ, Seiko DPU-414 and Postscript printers via optional PAC 91

Warranty

Three-years, parts and labor on mainframe instrument
One-year on accessories

Accessories

Standard accessories	Fluke 199C, Fluke 196C, Fluke 199B, Fluke 196B, Fluke 192B
Rechargeable battery pack (installed)	BP190
Line voltage adapter/battery charger	BC190
Voltage probes and accessories	10:1 voltage probe (VPS200, 1 red + 1 grey) including hook clip, ground lead with mini alligator clip, ground lead with hook clip, 4 mm add-on probe tip, ground lead to 4 mm banana plug
Multimeter test leads	TL75 Hard Point test lead set (1 red, 1 black)
User manual	10 language versions on CD-ROM, "Getting Started" booklet included with instrument

Technical specifications 120 Series

Oscilloscope mode

Vertical deflection

Bandwidth and risetime	Fluke 125, 124	Fluke 123
Bandwidth (risetime)		
• with VPS40 probes	40 MHz	20 MHz
• input A and B directly	40 MHz	20 MHz
• with STL120 Shielded Test Leads	12.5 MHz	12.5 MHz
Instrument risetime (input directly)	8.75 ns	17.5 ns

Number of inputs: 2

Input coupling: AC, DC with ground level indicator

Input sensitivity: 5 mV to 500 V/div (with the included VPS40 (Fluke 125, 124) and STL120 shielded test leads measure up to 600 Vrms, CAT III)

Input voltage: 600 V CAT III. See "general specifications" for more detailed information.

Vertical resolution: 8 bit

Accuracy: ± (1 % of reading + 0.05 x range/div)

Input impedance: 1 MΩ ± 1 % // 225 pF with STL120 shielded test leads; 1 MΩ ± 1 % // 20 pF ± 3 pF with BB120; 5 MΩ ± 1 % // 15.5 pF with VPS40, 10:1 Voltage probe

Horizontal

Max. sample rate (both channels simultaneously):

Fluke 125, 124: 2.5 GS/s for repetitive signals;

25 MS/s for single shot

Fluke 123: 1.25 GS/s for repetitive signals; 25 MS/s for single shot

Number of digitizers: 2

Time base range: 10 ns/div to 1 min/div; 20 ns/div to 1 min/div (Fluke 123)

Maximum record length: 512 Min-Max points per input

Accuracy: ± (0.1 % of reading + 1 pixel)

Glitch detect: 40 ns

Display and acquisition

Display modes: Input A, input A and B, envelope, smooth

Acquisition modes: Normal (including glitch capture), single shot, roll

Trigger and delay

Source: Input A, input B, external via optional ITP120

Modes: Automatic Connect-and-View, Free Run, Edge, Single Shot, Video, Video Line

Connect-and-View: Advanced automatic triggering that recognizes signal patterns and automatically sets up and continuously adjusts triggering, time base and amplitude. Automatically displays stable pictures of complex and dynamic signals like motor drive and control signals

Video triggering: NTSC, PAL, PAL+, SECAM. Includes line select

Time delay: Up to 10 divisions pre-trigger view

Measurements

Vdc, Vac, Vac+dc, Vpeak max, Vpeak min, Vpeak to peak, frequency (Hz), positive pulse width, negative pulse width, positive duty cycle, negative duty cycle, Amp ac, Amp dc, Amp ac+dc, Phase, Temperature °C, Temperature °F, dBV, dBm into 50 Ω and 600 Ω. (Amps, °C or °F with optional probes)

Cursor measurements (125, 124)

Sources: Input A, Input B

Modes: Single or dual vertical cursor, dual horizontal cursor, risetime or falltime

Measurements:

Single vertical line: Average, min value, max value, time from start of recording in roll mode

Dual vertical lines: ΔV at markers, time between cursors, 1/T between cursors (in Hz)

Dual horizontal lines: High, low or ΔV – readout, risetime and falltime: transition time, 0 %-level, 100 %-level, with markers at 10 % and 90 %

Accuracy: As oscilloscope

Bus health tester (Fluke 125 only)

Bus health automatically analyzes the electrical signals on the network to give waveform data and measure individual parameters. Automatic comparison of the measurement results to the standards results in “good” or “false” indicators to be displayed per parameter.

Bus types and reference standards used:

AS-i (EN50295, 166 kb/s)[®];

CAN-bus (ISO-11898, up to 1 Mb/s);

Interbus S (EIA-485, up to 10 Mb/s)[®];

ControlNet (61158 type 2, 2.5 Mb/s)[®];

Modbus (EIA-232, up to 115 kb/s and

EIA-485, up to 10 Mb/s)[®];

Foundation Fieldbus H1 (61158 type 1, 31.25 kb/s)

and H2 (61158 type 1, up to 10 Mb/s);

Profibus DP (EIA-485, up to 10 Mb/s) and

PA (61158 type 1, 31.25 kb/s);

Ethernet [10Base2 (coaxial) and 10BaseT (UTP)], 10 Mb/s;

RS-232 (EIA-232, up to 115 kb/s);

RS-485 (EIA-485, up to 10 Mb/s);

or user defined system

Measured parameters: Baud rate, risetime, falltime, high level, low level, distortion, amplitude and jitter, with comparison to system’s standard values

Power measurements (Fluke 125 only)

Measure types: Watt, VA, VAR, Power Factor (PF)

Power configuration: Single phase or balanced 3-phase (delta-configuration) mains supply

Voltage measurement: Channel A, using STL120, voltage probe or direct input

Current measurement: Channel B, using i400s current clamp (included) or other compatible clamp

Current clamp sensitivity: 0.1/1/10/100/1000 mV/A, 10 mV/mA and 400 mV/A

Harmonics mode (Fluke 125 only)

Converts waveform information into a harmonics display (using FFT processing), which shows the relative amplitudes of the 1st up to the 33rd harmonic

Harmonics frequency range: DC to 33rd harmonic (fundamental ≤ 60 Hz); DC to 24th (fundamental ≤ 400 Hz)

Analyzed waveform: Voltage waveform (Ch.A), current waveform (Ch.B) or power (Ch.A x Ch.B), automatically generated

Display: Bargraph showing 1st up to 33rd harmonic, amplitude displayed in % relative to fundamental

Timebase setting: 5 ms/div.

Measurements: Relative amplitude of individual harmonic; THD in % or %f

Dual input meter

The specified accuracy is valid over the temperature range 18 °C to 28 °C (64 °F to 82 °F). Add 10 % of specified accuracy for each °C below 18 °C or above 28 °C (64 °F to 82 °F)

Max. meter bandwidth: 40 MHz (Fluke 125, 124), 20 MHz (Fluke 123)

Voltage measurements

Measurement selection: Vdc, Vac rms, Vac+dc rms, Vpeak max, Vpeak min, V_{pk-pk}

Ranges: 500 mV, 5 V, 50 V, 500 V, 1250 V

Full scale reading: 5,000 counts

Accuracy

Vdc: ± (0.5 % + 5 counts)

Vac rms:

1 Hz to 60 Hz: ± (1 % + 10 counts)

60 Hz to 1 kHz: ± (2.5 % + 15 counts)

20 kHz to 1 MHz ± (5 % + 20 counts)

Vac+dc true-rms:

DC to 60 Hz: ± (1 % + 10 counts)

60 Hz to 1 kHz: ± (2.5 % + 15 counts)

20 kHz to 1 MHz (5 % + 20 counts)

Vpeak:

Max peak or Min peak: 5 % of full scale

Peak-to-peak: 10 % of full scale

Ohms

Ranges: 500 Ω, 5 kΩ, 50 kΩ, 500 kΩ, 5 MΩ, 30 MΩ (all models), 50.00 Ω (Fluke 125 only)

Max. resolution: 5,000 counts

Accuracy: ± (0.6 % of reading + 5 counts)

Capacitance

Ranges: 50 nF to 500 μF

Max. resolution: 5,000 counts

Accuracy: ± (2 % of reading + 10 counts)

Other meter functions

Frequency: Up to 70 MHz (Fluke 125, 124) or up to 40 MHz (Fluke 123)

Rotational speed (RPM): Revolutions per minute, based on 1, 2 or 4 or 8 pulses per 2 revolutions (Fluke 125 only)

Max. RPM reading: 50 kRPM

Continuity: Beeper on < 30 Ω

Diode test: Up to 2.8 V

Amps: Amp dc, Amp ac, Amp ac+dc using an optional current clamp or shunt. Scaling factors: 0.1 mV/Amp to 100 V/Amp

Duty cycle: 2 % to 98 %, up to 30 MHz
Temperature (°C, °F): With optional accessories. Scale factors 1 mV/°C or 1 mV/°F
Number of inputs: 2
Input impedance: 1 MΩ ± 1 % // 10 pF ± 2 pF
Advanced meter functions: Auto/manual ranging, TouchHold®, Relative measurements (zero reference), TrendPlot recording

Recorder mode

Trendplot recording

Dual input electronic paperless chart recorder. Plots and displays the actual, minimum, maximum and average of any measurement.
Source and display: Input A, input A and B
Range: 15 s/div to 2 days per division (automatic)
Recorded timespan: Up to 16 days with a resolution of 1.5 hours
Recording mode: Continuous with automatic vertical scaling and horizontal time compression
Measurement speed: 2.5 measurements per second maximum
Horizontal scale: Time from start

General specifications

Case

Design: Rugged, shock proof with integrated protective holster
Drip and dust proof: IP51 according to IEC529
Shock and vibration: Shock 30 g according to MIL-PRF-28800F, Class 2, par. 3.8.4.2 and 4.5.5.3.1
Shock and vibration: Vibration 3 g according to MIL-PRF-28800F, Class 2, par. 3.8.5.1 and 4.5.5.4.1

Display

Bright LCD with CCFL backlight, 60 (35) cd/m² with (without) power adapter
Size: 72 x 72 mm (2.8 x 2.8 inch)
Resolution: 240 x 240 pixels
Contrast and brightness: User adjustable, temperature compensated

Memory save and recall

20 (10 in Fluke 123) instrument screens with user set-ups and user text

Real-time clock

Time and date stamp TrendPlot recording

Power

Line power: Country-specific line voltage adapter/battery charger included
Battery power: Rechargeable Ni-MH BP120MH (installed)
Battery operating time: Up to 7 hours using BP120MH
Battery charging time: 7 hours
Battery power saving functions: Auto power down with adjustable power down time. On-screen battery power indicator

Mechanical data

Size: 50 x 115 x 232 mm (2 x 4.5 x 9.1 in)
Weight: 1.2 kg (2.64 lbs)

Safety

Compliance:
 EN61010-1-2001, Pollution degree 2;
 UL 3111-1;
 CAN/CSA C22.2, No. 61010-1-04,
 including _cCSA_{US}-approval;
 ANSI/ISA-82.02.01

Input voltage ratings

Maximum input voltage: 600 V CAT III (Maximum voltage between input and reference lead)
Maximum input voltage using VPS40 Probe: 600 V CAT III, 1000 V CAT II (Maximum voltage between probe tip input and reference lead)
Floating voltage: 600 V CAT III (Maximum voltage between earth ground and any terminal [signal input or reference lead])
Maximum voltage between reference leads: Instrument has common grounds connected via self recovering fault protection. For different ground potential measurements between inputs, use DP120 differential voltage probe

Environmental

According to MIL-PRF-28800F, Class 2

Operating temperature: 0 °C to +50 °C
Storage temperature: -20 °C to +60 °C
Humidity:
 10 °C to 30 °C, 95% RH non condensing;
 30 °C to 40 °C, 75% RH non condensing;
 40 °C to 50 °C, 45% RH non condensing
Maximum operating altitude: 2,000 m (6,500 feet);
 3,000 m (10,000 feet) voltages ≤ 400 V
Maximum storage altitude: 12 km (40,000 feet)
Electro-Magnetic-Compatibility (EMC):
 EN61326-1 for emissions and immunity

Optically isolated PC/printer interface

To printer: Supports HP Laserjet®, Deskjet®, Epson FX/LQ and postscript printers via optional PAC91
 To PC: Transfer instrument settings, screen images and data, compatible with FlukeView® software for Windows® via optional PM9080

Warranty


Three-years (parts and labor) on main instrument
 One-year on accessories

Accessories

Standard accessories	Fluke 125, Fluke 124, Fluke 123
Rechargeable battery pack (installed)	BP120MH
Line voltage adapter/battery charger	PM8907
Voltage probes and accessories	STL120 Shielded Test lead set; VPS40 high impedance 10:1 probe, 40 MHz (1 black, included with Fluke 125, 124); HC120 hook clips; ground leads with mini alligator clips; AC120 alligator clips; BB120 BNC-to-Shielded banana adapter
Multimeter test leads	TL75 Hard Point test lead set (1 black)
Current clamp	i400s Current Clamp (included with Fluke 125 only)
User manual	15 language versions on CD-ROM, "Getting Started" booklet included with instrument

International safety standards

Measurement voltage category	Summary description
CAT IV	Three phase at utility connection, any outdoor conductors (under 1,000 V) <ul style="list-style-type: none"> • Outside and service entrance • Service drop from pole to building • Run between meter and panel • Overhead line to detached building • Underground line to well pump
CAT III	Three-phase distribution (under 1,000 V), including single phase commercial lighting and distribution panels <ul style="list-style-type: none"> • Feeders and short branch circuits • Distribution panel devices • Heavy appliance outlets with "short" connections to service entrance
CAT II	Single-phase receptacle connected loads <ul style="list-style-type: none"> • Outlets and long branch circuits • All outlets at more than 10 m (30 ft) from Category III source • All outlets at more than 20 m (60 ft) from Category IV source
CAT I	Electronic <ul style="list-style-type: none"> • Electronic equipment • Low energy equipment with transient limiting protection

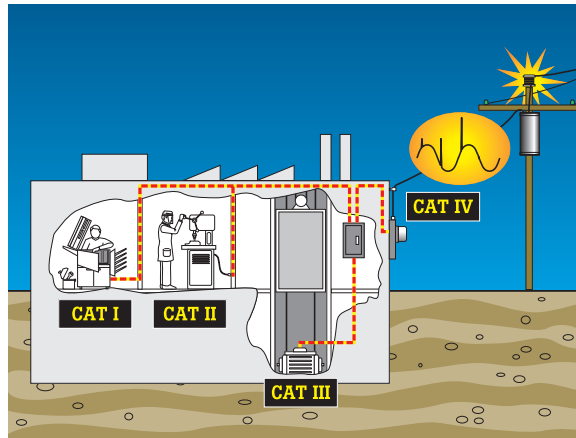

To protect your instrument and—more importantly—yourself, choose a test tool that can withstand the electrical hazards present in the environment in which you plan to use it.

EN61010 establishes international safety requirements for electrical measurement equipment. It separates the various electrical environments into installation categories based on the danger from

high-voltage energy transients. To choose the right tool, the voltage rating alone does not determine the safety. It is the combination of voltage rating and installation category that determines maximum transient withstand capability of the tool. CAT III rated instruments are recommended for measurement on industrial power distribution systems.

FlukeView® ScopeMeter® Software for Windows®

FlukeView software adds PC power to your Fluke ScopeMeter Test Tools.

FlukeView ScopeMeter software helps you get more out of your ScopeMeter:


- Store instrument's screen copies on the PC, in color (with Fluke 190C Series) or in black and white (Fluke 190B and 120 Series)
- Copy color screen images into your reports and documentation (color screen images with Fluke 190C Series only)
- Capture and store waveform data from your ScopeMeter on your PC
- Create and archive waveform references for automatic (Fluke 190C Series) or visual (Fluke 190B and 190C Series) comparison
- Use cursors for parameter measurement
- Includes waveform analysis, e.g., FFT spectrum analysis
- Copy waveform data into your spreadsheet for detailed analysis
- Extended recording of up to four user-selected measurements help you monitor and analyze slow moving signals and related events
- Logging of other readings directly into other application programs, eg., spreadsheet
- Add user text to instrument setups and send these to the instrument for operator reference and instructions

- Capture complete replay sequence into the PC for further analysis and documentation
- English, French and German versions included on a single CD-ROM

Note: Some functionality may be available with specific ScopeMeter models only

System requirements

- Pentium 90 or better
- CD-ROM drive
- Windows® 95/98/Me/NT 4.0/2000/XP
- One free RS232 port or USB port
- PM9080 optically isolated RS232 adapter/cable, or:
- OC4USB optically isolated USB interface adapter/cable, available separately or included in SCC120/SCC190 kit and in ScopeMeter "S" versions

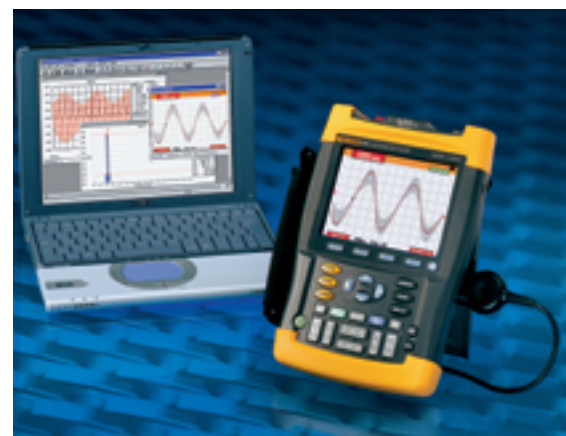

Supported instruments

Full support for Fluke 199C, 199B, 199, 196C, 196B, 196, 192B, 192, 125, 124, 123

Selection guide

	Color ScopeMeter 190C Series		ScopeMeter 190B Series			ScopeMeter 120 Series		
	Fluke 199C	Fluke 196C	Fluke 199B	Fluke 196B	Fluke 192B	Fluke 125	Fluke 124	Fluke 123
Bandwidth	200 MHz	100 MHz	200 MHz	100 MHz	60 MHz	40 MHz	40 MHz	20 MHz
Max real time sample rate	2.5 GS/s	1 GS/s	2.5 GS/s	1 GS/s	500 MS/s	25 MS/s	25 MS/s	25 MS/s
Max equivalent time sample rate	—	—	—	—	—	2.5 GS/s	2.5 GS/s	1.25 GS/s
Display	14.4 cm full color LCD		14.4 cm monochrome LCD			10.2 cm monochrome LCD		
Digital persistence	Yes, gives analog oscilloscope like waveform decay (user selectable)		—			—		
Envelope mode	Yes		Yes			Yes		
Waveform compare	Visual reference and automatic 'Pass / Fail' testing		Visual reference			—		
Max record length in Scope Mode: in ScopeRecord mode:	3000 points per input channel, allowing for high time resolution signal analysis using zoom 27,000 points per input or more (5 ms/div to 2 min/div)					512 min/max points per input		
Number of inputs	2 plus external/DMM input, all isolated from each other and from ground					2		
Number of digitizers	2					2		
Independently floating isolated inputs	Up to 1000 V between inputs, references and ground					—		
Input sensitivity	2 mV/div to 100 V/div		5 mV/div. to 100 V/div			5 mV/div to 500 V/div		
Glitch capture	Up to 3 ns using pulse width triggering; 50 µs peak detect at 5 ms/div to 1 min/div					40 ns		
Timebase range in Scope mode	5 ns/div to 2 min/div				10 ns/div to 2 min/div	10 ns/div to 1 min/div	20 ns/div to 1 min/div	
Trigger types	Connect-and-View™, Free Run, Single Shot, Edge, Delay, Video Frame, Video Line Selectable pulse width and external					Connect-and-View™, Free Run, Single Shot, Edge, Video		
Scope measurements	7 cursor measurements, 30 automatic measurements					As 124 + Power, VA, VAR, PF, RPM, Vpwm; THD	cursors + 26 automatic measurements	26 automatic measurements
	Automatic Vrms and watts measurement on cursor limited part of waveform		—					
Bus health test function	—					For standard industry buses		—
Waveform mathematics	A + B, A - B, A x B, A versus B (X-Y-mode, giving Lissajous diagrams)					Harmonics mode	—	
	+ Frequency Spectrum (FFT)		—					
Power measurements	P (W), VA, VAR, PF					Power, VA, VAR, PF, Vpwm		—
ScopeRecord trigger modes	Start on trigger, stop on trigger, stop in absence of trigger signal					—		
Capture last 100 screens	Automatic, with replay capability					—		
Dual input TrendPlot	Yes, with cursors and zoom					Yes, with cursors		Yes
Memory for screens and set-ups	10 screens with set-up; 5 more memories are made available upon registration of the ScopeMeter					20		10
Memory for recordings	Two, each can store 100 scope screens, a ScopeRecord or a TrendPlot							
True-rms multimeter	5000 counts, Volts, Amps, Ohms, Continuity, Diode, Temp					Dual fully featured 5000 counts DMM		
Safety certified (EN61010-1)	1000 V CAT II / 600 V CAT III (instrument and included accessories)					600 V CAT III (instrument and included accessories)		
Battery (installed)	4 hr Ni-MH (BP190MH)					7 hr Ni-MH (BP120MH)		
Line Power	Adapter/battery-charger included (BC190)					Adapter/battery-charger included (PM8907)		
Size	25.6 x 16.9 x 6.4 mm (10.1 x 6.7 x 2.5 in)					23.2 x 11.5 x 5.0 mm (9.2 x 4.5 x 2 in)		
Weight	2 kg (4.4 lb)					1.2 kg (2.64 lbs)		
PC and Printer Interface	Using optional optically insulated adapter/cable OC4USB (USB) or PM9080 (RS-232)							
Warranty	Three-years on main instrument, one-year on the standard accessories							

Detailed technical specifications, optional accessories and a virtual product demo can be found on the Fluke web site. Check it out at: www.fluke.com/scopemeter.

Ordering information

Fluke-199C/S	Color ScopeMeter (200 MHz / 2.5 GS/s) with SCC190 kit	BP120MH	Rechargeable NiMH Battery for use with Fluke 120 Series
Fluke-199C	Color ScopeMeter (200 MHz / 2.5 GS/s)	BP190	Rechargeable NiMH Battery for use with Fluke 190 Series
Fluke-196C/S	Color ScopeMeter (100 MHz / 1 GS/s) with SCC190 kit	SW90W	FlukeView ScopeMeter Software for Windows
Fluke-196C	Color ScopeMeter (100 MHz / 1 GS/s)	OC4USB	Optically isolated USB adapter/cable
Fluke-199B/S	ScopeMeter (200 MHz / 2.5 GS/s) with SCC190 kit	PM9080	Optically isolated RS232 adapter/cable
Fluke-199B	ScopeMeter (200 MHz / 2.5 GS/s)	SCC190	Software - Cable - Case kit for Fluke 190 Series
Fluke-196B/S	ScopeMeter (100 MHz / 1 GS/s) with SCC190 kit	SCC120	Software - Cable - Case kit for Fluke 120 Series
Fluke-196B	ScopeMeter (100 MHz / 1 GS/s)	C195	Durable, universal soft carrying case for ScopeMeter Test Tools and accessories
Fluke-192B/S	ScopeMeter (60 MHz / 500 MS/s) with SCC190 kit	C190	Hard shell protective carrying case for Fluke 190 Series
Fluke-192B	ScopeMeter (60 MHz / 500 MS/s)	C125	Durable, protective soft carrying case for Fluke 120 Series
Fluke-125/S	Industrial ScopeMeter, 40 MHz, with SCC120 kit	C120	Hard shell protective carrying case for Fluke 120 Series
Fluke-125	Industrial ScopeMeter, 40 MHz	DP120	Differential Voltage Probe for use with Fluke 120 Series
Fluke-124/S	Industrial ScopeMeter, 40 MHz, with SCC120 kit	VPS40	40 MHz, 10:1 Voltage probe set for use with Fluke 120 Series
Fluke-124	Industrial ScopeMeter, 40 MHz		
Fluke-123/S	Industrial ScopeMeter, 20 MHz, with SCC120 kit		
Fluke-123	Industrial ScopeMeter, 20 MHz		

Fluke. Keeping your world up and running.®

Fluke Corporation
PO Box 9090, Everett, WA USA 98206

Fluke Europe B.V.
PO Box 1186, 5602 BD Eindhoven, The Netherlands

For more information call:
In the U.S.A. (800) 443-5853 or Fax (425) 446-5116
In Europe/M-East/Africa +31 (0) 40 2675 200 or Fax +31 (0) 40 2675 222
In Canada (800)-36-FLUKE or Fax (905) 890-6866
From other countries +1 (425) 446-5500 or Fax +1 (425) 446-5116
Web access: <http://www.fluke.com>

©2007 Fluke Corporation. All rights reserved.
Specifications subject to change without notice.
Trademarks are the property of their respective owners.
Printed in U.S.A. 4/2007 1629083 D-EN-N Rev F

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Fluke:](#)

[FLUKE-196B/003S](#) [FLUKE-192B/003S](#) [FLUKE-192B/003](#) [FLUKE-199C/003](#) [FLUKE-199B/003](#) [FLUKE-199C/003S](#)
[FLUKE-196C/003](#) [FLUKE-196B/003](#) [FLUKE-196C/003S](#) [FLUKE-199B/003 Z540 W/DATA](#)