




ScotchlokTM Terminals

MVU18-250DMF-A, MVU14-250DMF-A,
Multi-Stack Disconnect, Vinyl Insulated,
Butted Seam

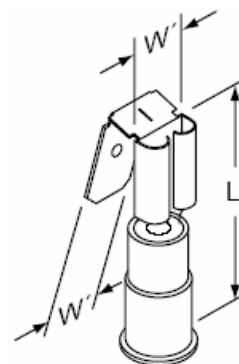

Data Sheet

February 2008

Product Number	Wire Range (AWG)	Mates with Male Tab Width (W') x Thickness	L	Maximum Insulation Diameter
MVU18-250DMF-A	22-18	0.250 x 0.032	.87	.15
MVU14-250DMF-A	16-14	0.250 x 0.032	.87	.17

Specifications

Wire Size:	See Table Above
Barrel Seam:	Butted
Maximum Voltage Rating:	300 V Building Wire
Maximum Operating Temp:	221°F (105°C)
Maximum Current:	Same as Wire
Insulator Material:	Vinyl
Terminal Material:	Brass
Terminal Plating:	Tin

Installation Information

WARNING

Turn power off before installing or removing terminal. All electrical work should be done according to appropriate electrical codes.

Strip away the end 3/8 inch of wire insulation.

Make the crimp the proper station of a recommended 3MTM ScotchlokTM Crimp Tool: TH-440, TH-450 (scissor style) or TR-490 (ratchet style) hand tools.



Barrel Crimp (Required)

Engineering Specification

Crimp-Type Multi-Stack Disconnects shall, electrically and mechanically, connect permanently to a pre-stripped end of a stranded copper wire, and have a tongue portion with fingers which grip a Male Quick-Slide and a tongue extension to be gripped by a Female Quick-Slide in a separable, reusable manner, forming a Quick Connect Wiring Termination.

The Multi-Stack Disconnect line shall offer variations in separable connections: Male Quick-Slide (0.250" wide), Female Quick-Slide (0.250" wide) and barrel variations in wire (AWG) size (22-18, 16-14) and construction (vinyl insulated and nylon insulated with insulation grip). The tongue shall be marked with the wire range.

The Separable Connection formed by the Multi-Stack Disconnect and the mating connector(s) may require a suitable strain relief to prevent accidental separation.

Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

Warranty; Limited Remedy; Limited Liability:

This product will be free from defects in material and manufacture at the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.**

3M and Scotchlok are trademarks of 3M Company.



Electrical Markets Division

6801 River Place Blvd.
Austin, TX 78726-9000
800 245 3573
FAX 800 245 0329
www.3M.com/electrical

Please recycle.
© 3M 2008 All rights reserved.
78-8127-6829-5_A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

3M:

[MVU14-250DMFK-A](#) [MVU18-250DMFK-A](#)