

GFR Series - 3 Pole+N, D Trip, 100 mA 480Y/277V AC Ground Fault Relay with Overload Protection (RCBO)

Altech Corp.

The GFR Series is a combined Equipment Ground Fault Relay and Supplementary Protector (RCBO), featuring dual pole switching (live and neutral) and designed to provide protection against overloads and AC ground faults (residual current faults) as well as pulsating DC ground faults.



Ordering Information


Rated Current	Type/Cat. No.	Rated Voltage
5.0A	GFR4D05100	480Y/277V AC
6.0A	GFR4D06100	480Y/277V AC
8.0A	GFR4D08100	480Y/277V AC
10A	GFR4D10100	480Y/277V AC
12A	GFR4D12100	480Y/277V AC
13A	GFR4D13100	480Y/277V AC
15A	GFR4D15100	480Y/277V AC
16A	GFR4D16100	480Y/277V AC
20A	GFR4D20100	480Y/277V AC
25A	GFR4D25100	480Y/277V AC
30A	GFR4D30100	480Y/277V AC
32A	GFR4D32100	480Y/277V AC
35A	GFR4D35100	480Y/277V AC
40A	GFR4D40100	480Y/277V AC

Technical Specification

Number of Poles	3+N
Voltage Rating (maximum)	480Y/277V AC
Ground Fault Sensitivity Level	100 mA
Short Circuit Withstand Rating	10 kA
Rated Frequency	50/60Hz
Trip Characteristic	D
Cable Size & Tightening Torque	Stranded Wire: 16 - 3 AWG (1.5 mm ² - 25 mm ²) @ 17.5 lb-in (2.0 Nm) Solid Wire: 16 - 10 AWG (1.5 mm ² - 5.5 mm ²) @ 17.5 lb-in (2.0 Nm) 18 - 16 AWG (1 mm ² - 1.5 mm ²) @ 25 lb-in (2.8 Nm)
Electrical Life	6000 Switching Operations
Mechanical Life	10000 Switching Operations

Dimensions

(to convert to inches multiply by 0.03937)

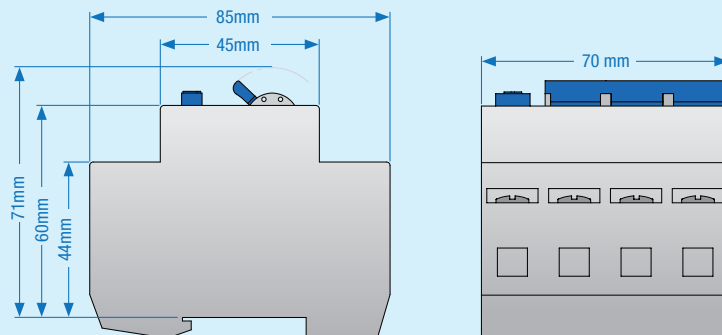


Weight

217 g


GFR Series RCBO Short Circuit Withstand Rating

V	I	IR	Backup
3+N Pole	≤20A	10kA	None
480Y/277V AC	>20A	10kA	Class J Fuse 250A or lower Altech L Series Branch Circuit Breaker Altech R Series Supplementary Protector



GFL Series RCBO Overload Trip Curves

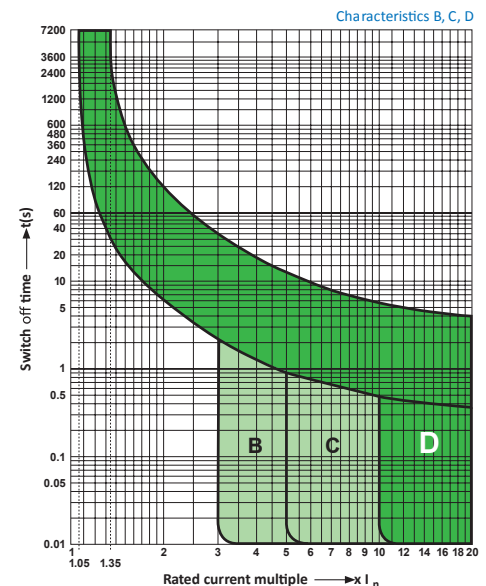



GFR Series RCBO Ground Fault Trip Curve

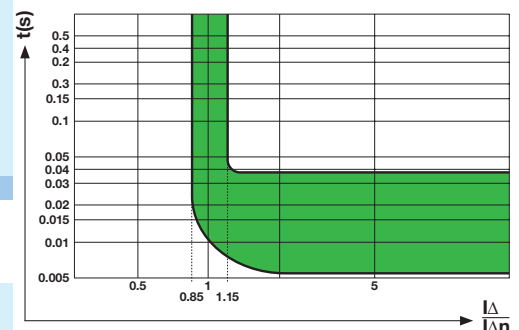


GFR Series - 3 Pole+N, D Trip, 100 mA
 Applicable voltage systems and wiring examples.

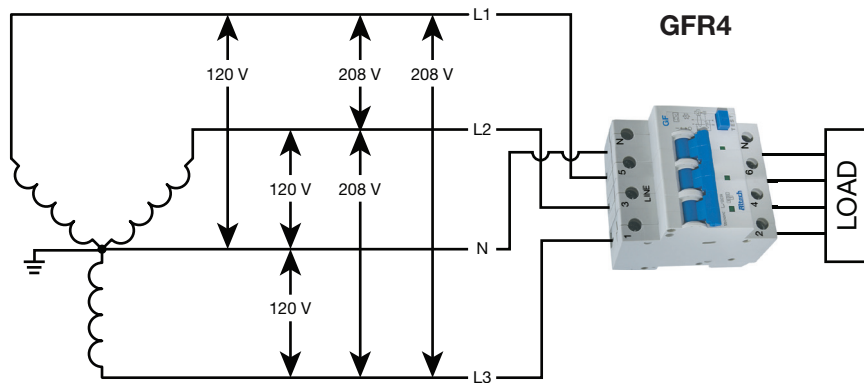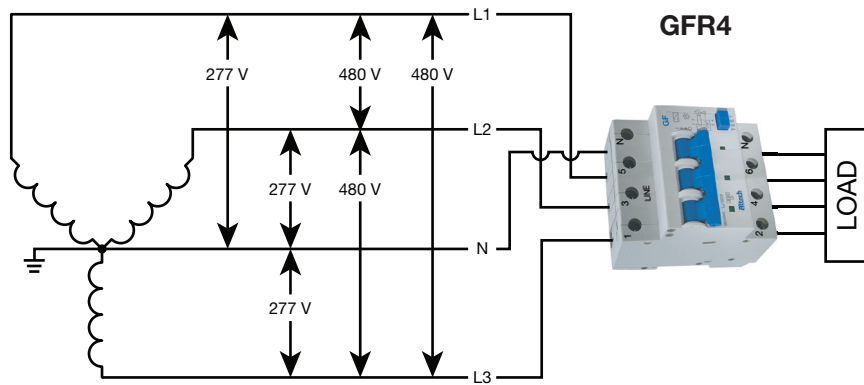

UL 1077
 Ground Fault Relay
 with Overload Protection

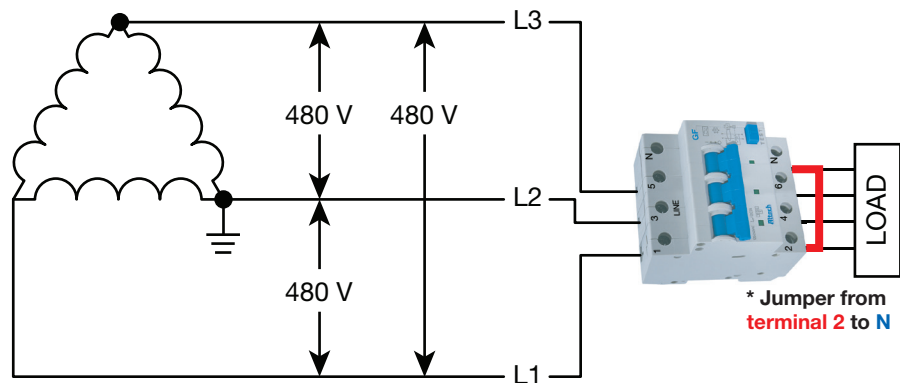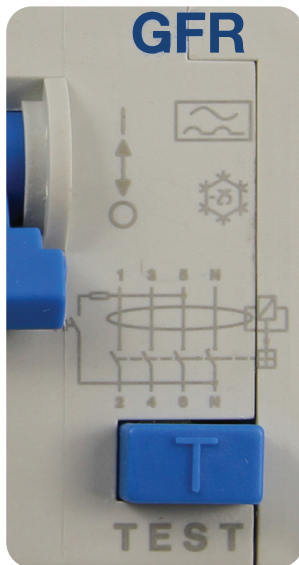

* Jumper from
 terminal 2 to N

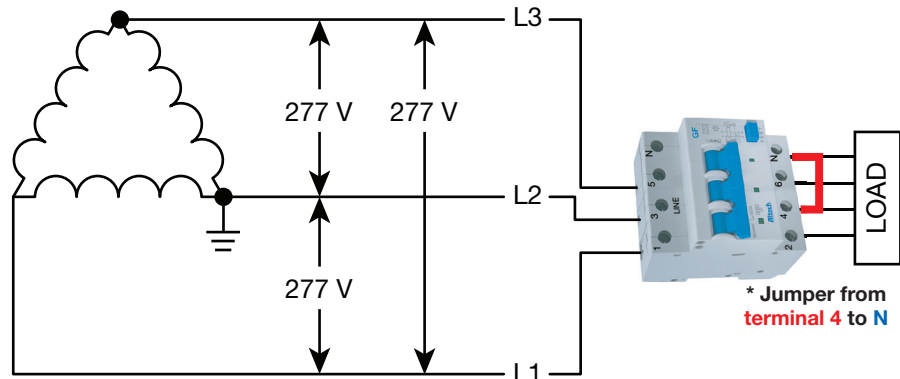

* Jumper from
 terminal 4 to N

* Either jumper connection can be used for both voltage configurations.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Altech:](#)

[GFR4D06100](#) [GFR4D16100](#) [GFR4D08100](#) [GFR4D30100](#) [GFR4D25100](#) [GFR4D40100](#) [GFR4D15100](#)
[GFR4D13100](#) [GFR4D05100](#) [GFR4D20100](#) [GFR4D32100](#) [GFR4D10100](#) [GFR4D12100](#)