

# MINIATURE RELAY

## 1 POLE—1 to 2 A (FOR SIGNAL SWITCHING)

### FBR211 SERIES

RoHS compliant



#### ■ FEATURES

- 2 A maximum carrying current  
Capable of 2 A maximum continuous carrying current in the contact
- Superior reliability gold-overlay contacts  
P type: Gold overlay silver-palladium contacts
- Interchangeable terminal pitch of one inch grid terminal layout
- High sensitivity, low power dissipation types also available  
Standard types: 0.4 W (A or B type)  
High sensitivity type: 0.1 W (C or E type)
- Conforms to FCC 68.312 (high dielectric strength type)
- UL recognized (File number E5615)
- CSA recognized (File number LR6416)
- RoHS compliant since date code 4331  
Please see page 5 for more information



#### ■ ORDERING INFORMATION

[Example] FBR211 S A D012 U - P (CSA)  
(a) (b) (c) (d) (e) (f) (g) (h)

(a)	Series Name	FBR211
(b)	Enclosure	S: Flux free type N: Plastic sealed type
(c)	Coil Power and Schematics	A: Standard A type } (nominal power 450 mW type) B: Standard B type } C: High sensitivity C type } (nominal power 20 mW type) E: High sensitivity E type }
(d)	Nominal Voltage	(Example) D003: 3 VDC D012: 12 VDC (refer to the COIL DATA CHART)
(e)	UL Marking on Cover	Nil : No UL marking U : UL marking
(f)	Contact Material	P : Gold-overlay silver-palladium M : Gold-overlay silver
(g)	Special Type	Nil : Standard 2 : High dielectric strength type
(h)	CSA Marking	Nil : Standard -CSA : UL + CSA marking (valid when (e) is U)

Note: The designation name is stamped on the top of the relay case as follows:  
(Example) Designation ordered: FBR211SAD005-P  
Stamp: 211SAD005-P

# FBR211 SERIES

## COIL DATA CHART

### 1. STANDARD (A or B type)

MODEL				Nominal voltage	Coil resistance (±10%)	Nominal current (at nominal voltage) approx.	Must operate voltage	Must release voltage	Maximum allowable voltage	Nominal power	Coil temperature rise
A type		B type									
Flux free	Plastic sealed	Flux free	Plastic sealed								
FBR211SAD001-n	FBR211NAD001-n	FBR211SBD001-n	FBR211NBD001-n	1.5 VDC	5 Ω	300 mA	70% max. of nominal voltage	10% min. of nominal voltage	150% of nominal voltage	Approx. 450 mW (at nominal voltage)	Approx. 45 deg (at nominal voltage)
FBR211SAD003-n	FBR211NAD003-n	FBR211SBD003-n	FBR211NBD003-n	3 VDC	20 Ω	150 mA					
FBR211SAD005-n	FBR211NAD005-n	FBR211SBD005-n	FBR211NBD005-n	5 VDC	56 Ω	89 mA					
FBR211SAD006-n	FBR211NAD006-n	FBR211SBD006-n	FBR211NBD006-n	6 VDC	80 Ω	75 mA					
FBR211SAD009-n	FBR211NAD009-n	FBR211SBD009-n	FBR211NBD009-n	9 VDC	180 Ω	50 mA					
FBR211SAD012-n	FBR211NAD012-n	FBR211SBD012-n	FBR211NBD012-n	12 VDC	320 Ω	38 mA					
FBR211SAD024-n	FBR211NAD024-n	FBR211SBD024-n	FBR211NBD024-n	24 VDC	1,280 Ω	19 mA					

Note: All values in the table are measured at 20°C.

### 2. HIGH SENSITIVE (C or E type)

MODEL				Nominal voltage	Coil resistance (±10%)	Nominal current (at nominal voltage) approx.	Must operate voltage	Must release voltage	Maximum allowable voltage	Nominal power	Coil temperature rise
C type		E type									
Flux free	Plastic sealed	Flux free	Plastic sealed								
FBR211SCD001-n	FBR211NCD001-n	FBR211SED001-n	FBR211NED001-n	1.5 VDC	12 Ω	125 mA	70% max. of nominal voltage	10% min. of nominal voltage	225% of nominal voltage	Approx. 200 mW (at nominal voltage)	Approx. 25 deg (at nominal voltage)
FBR211SCD003-n	FBR211NCD003-n	FBR211SED003-n	FBR211NED003-n	3 VDC	45 Ω	67 mA					
FBR211SCD005-n	FBR211NCD005-n	FBR211SED005-n	FBR211NED005-n	5 VDC	120 Ω	42 mA					
FBR211SCD006-n	FBR211NCD006-n	FBR211SED006-n	FBR211NED006-n	6 VDC	150 Ω	33 mA					
FBR211SCD009-n	FBR211NCD009-n	FBR211SED009-n	FBR211NED009-n	9 VDC	300 Ω	23 mA					
FBR211SCD012-n	FBR211NCD012-n	FBR211SED012-n	FBR211NED012-n	12 VDC	700 Ω	17 mA					
FBR211SCD024-n	FBR211NCD024-n	FBR211SED024-n	FBR211NED024-n	24 VDC	2,600 Ω	10 mA					

Note: All values in the table are measured at 20°C.

## ■ SPECIFICATIONS

Item		Standard (A or B type)	High sensitive (C or E type)
Contact	Arrangement	1 form C (SPDT)	
	Material	Gold-overlay silver-palladium / gold-overlay silver	
	Resistance (initial)	Maximum 100 mΩ (at 0.1 A 6 VDC)	
	Rating (resistive)	0.5 A 120 VAC or 1 A 28 VDC	
	Maximum Carrying Current	2 A	
	Maximum Switching Power	60 VA or 28 W	
	Max. Switching Voltage*1	220 VAC or 150 VDC	
	Maximum Switching Current	1.25 A (AC) or 2 A (DC)	
	Minimum Switching load*2 (reference)	Plastic sealed 1 mA, 1V Flux free 1 mA, 5V	
Coil	Nominal Power (20°C)	Approximately 450 mW	Approximately 200 mW
	Operate Power (at 20°C)	Approximately 315 mW maximum	Approximately 140 mW maximum
	Operating Temperature	−25°C to +55°C (no frost)	−25°C to +75°C (no frost)
	Operating Humidity	5 to 85%RH	
Time Value	Operate (at nominal voltage)	Maximum 5 ms	
	Release (at nominal voltage)	Maximum 5 ms	
Life	Mechanical	5 × 10 <sup>6</sup> operations minimum	
	Electrical (Refer to the REFERENCE DATA)	3 × 10 <sup>5</sup> operations minimum (at 1 A/ 28 VDC resistive load) 1 × 10 <sup>5</sup> operations minimum (at 2 A/ 12 VDC resistive load) 1 × 10 <sup>5</sup> operations minimum (at 0.5 A/120 VDC resistive load)	
Other	Vibration Resistance		10 to 55 Hz (double amplitude of 1.5 mm)
	Shock Resistance	Misoperation	100 m/s <sup>2</sup> (11±1 ms)      60 m/s <sup>2</sup> (11±1 ms)
		Endurance	1,000 m/s <sup>2</sup> (11±1 ms)
	Weight		Approximately 4 g

\*1 If the switching voltage exceeds the rated contact voltage, reduce the current. The current values vary according to the type of load.

\*2 Values when switching a resistive load at normal room temperature and humidity and in a clean environment. The minimum switching load varies with the switching frequency and operation environment.

## ■ INSULATION


Item		Standard (A or B)	High sensitive (C or E)
Isolation (initial)		Minimum 100 MΩ (at 500VDC)	
Dielectric Strength		500VAC 1 min. (standard)	
		1,500VAC 1 min. (high isolation coil and contact)	

## ■ SAFETY STANDARDS


Type	Compliance	Contact rating
UL	UL 110 E63615	Flammability: UL 94-V0 (plastics) 0.5A, 120VAC (resistive)
CSA	C22.2 No. 14 LR 40304, LR 46016	1A, 28VDC (resistive)

## CHARACTERISTIC DATA


Range of operation temperature and voltage  
(Standard 0.45 W type)

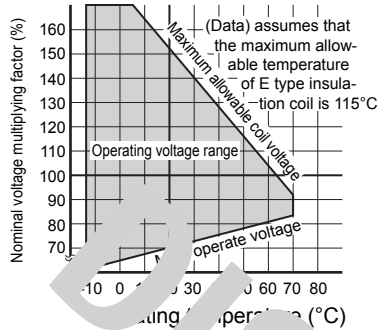


Range of operation temperature and voltage  
(high sensitive 0.2 W type)

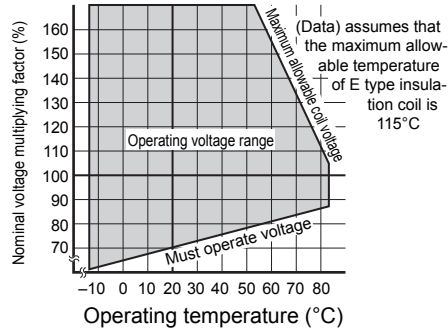


Operate and release time data

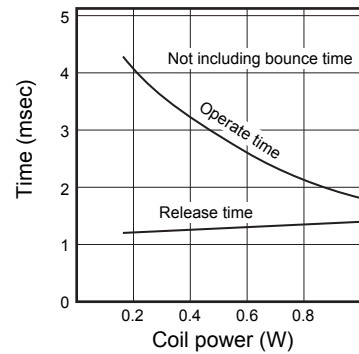


Coil temperature rise data

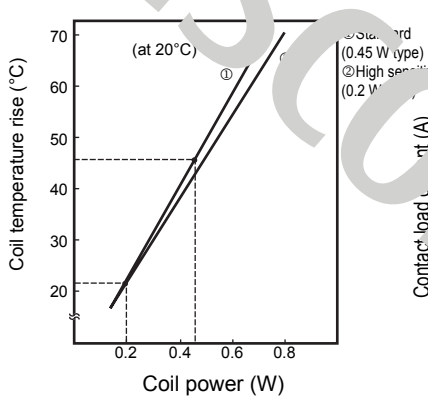

Maximum switching capacity

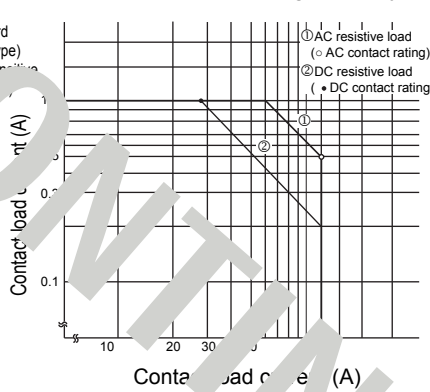


Life curve

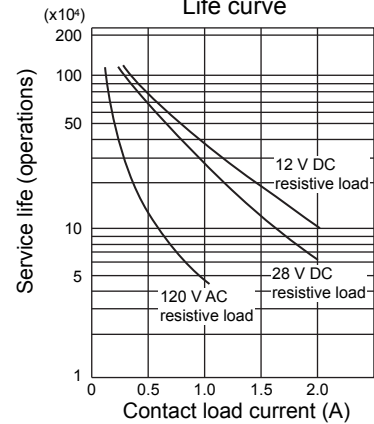


## REFERENCE DATA


Distribution of operate and release voltage

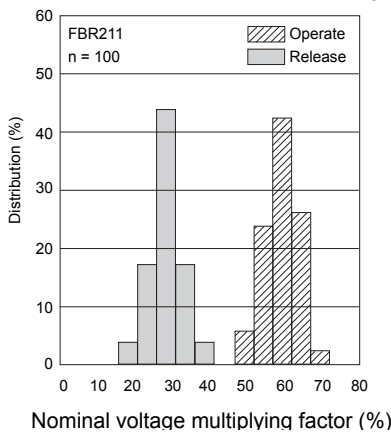

Distribution of operate and release time

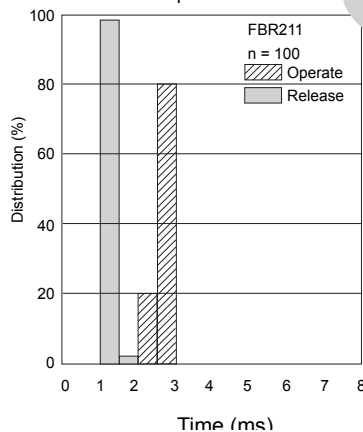


Distribution of contact resistance

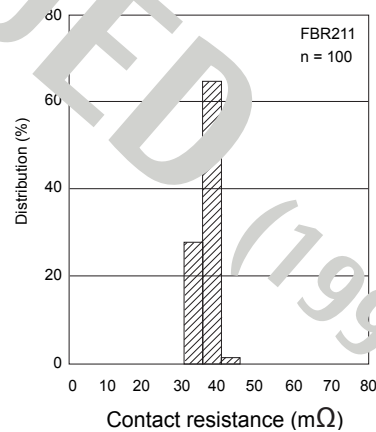

## ■ DIMENSIONS


### 1. STANDARD (Flux free type)

#### ●Dimensions

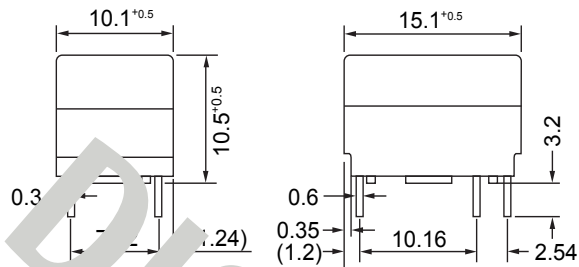


#### ●Schematics (BOTTOM VIEW)

(A type or C type)




(B type or E type)




### 2. N-TYPE (Flux free sealed type)

#### ●Dimensions

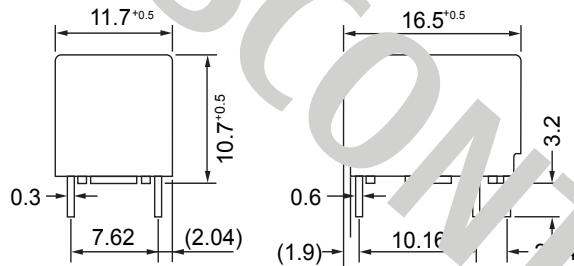


#### ●Schematics (BOTTOM VIEW)

(A type or C type)




(B type or E type)



### 3. PC BOARD MOUNTING HOLE LAYOUT

#### ●PC board mounting hole layout (BOTTOM VIEW)



Unit: mm

## RoHS Compliance and Lead Free Relay Information

### 1. General Information

- Relays produced after the specific date code that is indicated on each data sheet are lead-free now. Most of our signal and power relays are lead-free. Please refer to Lead-Free Status Info. (<http://www.fujitsu.com/us/downloads/MICRO/fcai/relays/lead-free-letter.pdf>)
- Lead free solder paste currently used in relays is Sn-3.0Ag-0.5Cu.
- All signal and most power relays also comply with RoHS. Please refer to individual data sheets. Relays that are RoHS compliant do not contain the 5 hazardous materials that are restricted by RoHS directive (lead, mercury, chromium IV, PBB, PBDE).
- It has been verified that using lead-free relays in leaded assembly process will not cause any problems (incompatible, etc.).
- "LF" is marked on each outer and inner carton. (No marking on individual relays).
- To avoid leaded relays (leaded-free sample, etc.) please consult with area sales office.
- We will ship leaded relays as long as the leaded relay inventory exists.

Note: Cadmium was exempted from RoHS on October 21, 2005. (Amendment to Directive 2002/95/EC)

### 2. Recommended Lead Free Solder Profile

- Recommended solder paste Sn-3.0Ag-0.5Cu

#### Reflow Solder condition

**Flow Solder condition:**

Pre-heating: maximum 120°C  
Soldering: dip within 5 sec. at  
260°C solder bath

**Solder by Soldering Iron:**

Soldering Iron  
Temperature: maximum 360°C  
Duration: maximum 3 sec.

**We highly recommend that you confirm your actual solder conditions**

### 3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays.

### 4. Tin Whisker

- Dipped SnAgCu solder is known as low risk tin whisker. No considerable length whisker was found by our in house test.

## Fujitsu Components International Headquarter Offices

### Japan

Fujitsu Component Limited  
Gotanda-Chuo Building  
3-5, Higashigotanda 2-chome, Shinagawa-ku  
Tokyo 141, Japan  
Tel: (81-3) 5449-7010  
Fax: (81-3) 5449-2626  
Email: [component@ft.ed.fujitsu.com](mailto:component@ft.ed.fujitsu.com)  
Web: [www.fcl.fujitsu.com](http://www.fcl.fujitsu.com)

### North and South America

Fujitsu Components America, Inc.  
250 E. Caribbea Drive  
Sunnyvale, CA 94089, U.S.A.  
Tel: (1-408) 745-4900  
Fax: (1-408) 745-4970  
Email: [component@fcl.fujitsu.com](mailto:component@fcl.fujitsu.com)  
Web: <http://www.fujitsu.com/services/edevice/components/>

### Europe

Fujitsu Components Europe B.V.  
Diamantlaan 25  
2132 WV Hoofddorp  
Netherlands  
Tel: (31-23) 5560910  
Fax: (31-23) 5560950  
Email: [info@fceu.fujitsu.com](mailto:info@fceu.fujitsu.com)  
Web: [emea.fujitsu.com/components/](http://emea.fujitsu.com/components/)

### Asia Pacific

Fujitsu Components Asia Ltd.  
102E Pasir Panjang Road  
#01-01 Citilink Warehouse Complex  
Singapore 118529  
Tel: (65) 6375-8560  
Fax: (65) 6273-3021  
Email: [fcal@fcal.fujitsu.com](mailto:fcal@fcal.fujitsu.com)  
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2008 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.  
Rev. January 18, 2008.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Fujitsu:

<a href="#">FBR211NBD024M</a>	<a href="#">FBR211SBD006M</a>	<a href="#">FBR211SBD006P</a>	<a href="#">FBR211NBD024P</a>	<a href="#">FBR211NBD012M</a>	<a href="#">FBR211NBD012P</a>
<a href="#">FBR211NED005P2</a>	<a href="#">FBR211NBD005P2</a>	<a href="#">FBR211SCD012P</a>	<a href="#">FBR211SBD024P</a>	<a href="#">FBR211SBD024M</a>	<a href="#">FBR211NCD024P</a>
<a href="#">FBR211NCD024M</a>	<a href="#">FBR211NED024P</a>	<a href="#">FBR211NCD003P</a>	<a href="#">FBR211NCD005P</a>	<a href="#">FBR211NCD001M</a>	<a href="#">FBR211NCD006P</a>
<a href="#">FBR211NCD003M</a>	<a href="#">FBR211NCD005M</a>	<a href="#">FBR211NCD009M</a>	<a href="#">FBR211NCD006M</a>	<a href="#">FBR211NCD001P</a>	<a href="#">FBR211NCD009P</a>
<a href="#">FBR211NAD024M</a>	<a href="#">FBR211NAD024P</a>	<a href="#">FBR211SED001M</a>	<a href="#">FBR211SBD012P</a>	<a href="#">FBR211SED009M</a>	<a href="#">FBR211SBD012M</a>
<a href="#">FBR211SED005P</a>	<a href="#">FBR211SED005M</a>	<a href="#">FBR211SED009P</a>	<a href="#">FBR211SED001P</a>	<a href="#">FBR211SED003M</a>	<a href="#">FBR211SED003P</a>
<a href="#">FBR211SED006M</a>	<a href="#">FBR211SED006P</a>	<a href="#">FBR211SCD006P</a>	<a href="#">FBR211SCD006M</a>	<a href="#">FBR211SCD005P</a>	<a href="#">FBR211NED012M</a>
<a href="#">FBR211NED012P</a>	<a href="#">FBR211NED009P</a>	<a href="#">FBR211NED009M</a>	<a href="#">FBR211NED006M</a>	<a href="#">FBR211NED005M</a>	<a href="#">FBR211NED001P</a>
<a href="#">FBR211NED003P</a>	<a href="#">FBR211NED006P</a>	<a href="#">FBR211NED003M</a>	<a href="#">FBR211NED001M</a>	<a href="#">FBR211NED005P</a>	<a href="#">FBR211SCD024P</a>
<a href="#">FBR211SCD024M</a>	<a href="#">FBR211SAD009P</a>	<a href="#">FBR211SAD003P</a>	<a href="#">FBR211SAD006M</a>	<a href="#">FBR211SAD001P</a>	<a href="#">FBR211SAD001M</a>
<a href="#">FBR211SAD005M</a>	<a href="#">FBR211SAD005P</a>	<a href="#">FBR211SAD009M</a>	<a href="#">FBR211SAD006P</a>	<a href="#">FBR211SAD003M</a>	<a href="#">FBR211NED024UM</a>
<a href="#">FBR211NED024M</a>	<a href="#">FBR211NBD003P</a>	<a href="#">FBR211NAD001P</a>	<a href="#">FBR211NBD009P</a>	<a href="#">FBR211NAD005P</a>	<a href="#">FBR211NBD003M</a>
<a href="#">FBR211NAD005M</a>	<a href="#">FBR211NBD001M</a>	<a href="#">FBR211NAD009P</a>	<a href="#">FBR211NBD009M</a>	<a href="#">FBR211NAD001M</a>	<a href="#">FBR211NAD009M</a>
<a href="#">FBR211NBD001P</a>	<a href="#">FBR211SAD012P</a>	<a href="#">FBR211SAD012M</a>	<a href="#">FBR211NCD012P</a>	<a href="#">FBR211NCD012M</a>	<a href="#">FBR211SAD024M</a>
<a href="#">FBR211SAD024P</a>	<a href="#">FBR211SCD003P</a>	<a href="#">FBR211SCD009M</a>	<a href="#">FBR211SCD001P</a>	<a href="#">FBR211SCD005M</a>	<a href="#">FBR211SCD009P</a>
<a href="#">FBR211SCD003M</a>	<a href="#">FBR211SCD001M</a>	<a href="#">FBR211SED012P</a>	<a href="#">FBR211SED012M</a>	<a href="#">FBR211NAD003P</a>	<a href="#">FBR211NAD006P</a>
<a href="#">FBR211NAD003M</a>	<a href="#">FBR211NAD006M</a>	<a href="#">FBR211NAD012M</a>	<a href="#">FBR211NAD012P</a>		