

POWER RELAY

120A Latching Relay


FTR-K4 Series

■ FEATURES

- Switching current : 120 A (1 form A)
- Contact resistance : Max. 0.5 mΩ (Initial)
- Compact size : 43.0 x 37.0 x 22.0 mm
- Plastic materials conform to UL94 flame class V-0

■ Applications

- Static payment meters
- Power conditioner
- Water heater

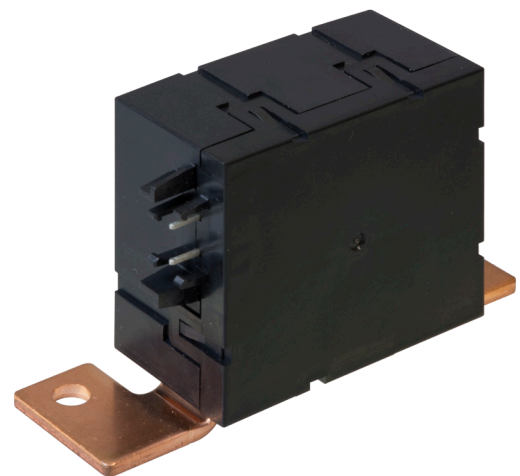

■ PARTNUMBER INFORMATION

[Example]	FTR-K4	P	B	012	W	-ST
	(a)	(b)	(c)	(d)	(e)	(f)

(a)	Relay type	FTR-K4	: FTR-K4 Series
(b)	Contact configuration	P	: 1 form A
(c)	Coil type	B	: Single winding latching type
(d)	Coil voltage	012 024 048	: 12VDC : 24VDC : 48VDC
(e)	Contact material	W	: Silver alloy
(f)	Special type	ST	: Standard

Note: The designation name is stamped on the top of the relay case as follows:
Example: Ordering part number: FTR-K4PB012W-ST
Stamped on part number: K4PB012W-ST

■ SPECIFICATION

Item			FTR-K4 type
Contact Data	Configuration		1 form A
	Material		Silver alloy
	Resistance (initial)		Max. 0.5 mW (at 1 A)
	Contact gap		0.68mm
	Max. switching current		120A
	Max. switching power		33,240VA (Resistive load 120 A – 277VAC)
	Max. switching voltage		440VAC
	Fault current making capacity		3.000A (IEC62055-31, UC3)
	Short-circuit current carrying capacity		6.000A (IEC62055-31, UC3)
Life	Mechanical		1 x 10 ⁶ operations
	Electrical		120A, 277VAC, 10 x 10 ³ operations. (cosφ=1.0 : 5×10 ³ operations, cosφ=0.5 : 5×10 ³ operations)
Coil Data	Rated power		2.4W
	Operating temperature		-40°C to +85°C (no frost)
Timing Data	Set		Max. 20ms (at nominal voltage, without bounce)
	Reset		Max. 20ms (at nominal voltage, without bounce)
Insulation	Contact gap (initial)		8mm
	Resistance (at 500VDC)		Min. 1,000MΩ
	Dielectric strength	Open contacts	2,000VAC, 1min
		Contacts to coil	4,000VAC, 1min
	Surge strength		12.000V / 1.2 x 50 ms
Other	Vibration resistance	Misoperation	10 to 55 to 10Hz single amplitude 0.75mm
		Endurance	10 to 55 to 10Hz single amplitude 0.75mm
	Shock	Misoperation	Min. 500m/s ² (11 ± 1ms)
		Endurance	Min. 1,000m/s ² (6 ± 1ms)
	Weight		Approximately 70g

Note:

Relays are shipped in a 'set' state. During shipping and handling, however, shocks may change the state to 'reset'. Consequently, at time of use (at power on) it is recommended to ensure that circuits are returned to desired state ('set' or 'reset').

Model	Rated Coil Voltage (VDC)	Coil Resistance +/- 10% (Ohm)	Must Operate Voltage * (VDC)	Must Release Voltage * (VDC)
FTR-K4PB012W	12	60	9.0	9.0
FTR-K4PB024W	24	240	18.0	18.0
FTR-K4PB048W	48	960	36.0	36.0

■ DIMENSIONS

Technical drawing of a mechanical part, showing a side view and a front view. The side view (top) shows a rectangular block with a central hole. Dimensions include: 2-0.64 (top left), 4.5 (top left), 43 (top center), 37 (right side), 5 (top left), 22.4 (left side), 4 (bottom left), 2 (bottom left), 4 (bottom right), 2 (bottom right). The front view (bottom) shows a rectangular block with a central hole. Dimensions include: 59.5 (bottom center), 14.8 (left side), 5 (left side), 5.5 (bottom left), 6.5 (bottom left), 4.3 (bottom right), 5 (bottom right), 6.7 (bottom right), 6.1 (bottom right), 22 (bottom right), 4.7 (left side), 4.7 (right side).

The diagram shows a 24-pin connector with pins numbered 1 to 24. Pins 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, and 24 are shown. Pins 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, and 24 are shown. Pins 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, and 24 are shown.

Reset (contact: OFF)

pin No.3(+)/pin No.2(-)

Set (contact: ON)

pin No.2(+)/pin No.3(-)

RoHS Compliance and Lead Free Information

1. General Information

- All relays produced by Fujitsu Components are compliant with RoHS directive 2011/65/EU including amendments.
- Cadmium as used in electrical contacts is exempted from the RoHS directives.
As per Annex III of directive 2011/65/EU.
- All relays are lead-free. Please refer to Lead-Free Status Info for older date codes at:
<http://www.fujitsu.com/downloads/MICRO/fcai/relays/lead-free-letter.pdf>
- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified.
This material has been verified to be compatible with PbSn assembly process.

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

Fujitsu Components International Headquarter Offices

Japan Fujitsu Component Limited Shinagawa Seaside Park Tower 19F, 12-4, Higashi-shinagawa 4-chome, Shinagawa-ku, Tokyo, 140-0002, Japan Tel: (81-3) 3450-1682 Fax: (81-3) 3474-2385 Email: fcl-contact@cs.jp.fujitsu.com Web: www.fujitsu.com/jp/fcl/	Asia Pacific Fujitsu Components Asia, Ltd. 102E Pasir Panjang Road #01-01 Citilink Warehouse Complex Singapore 118529 Tel: (65) 6375-8560 Fax: (65) 6273-3021 Email: fcal@sg.fujitsu.com Web: www.fujitsu.com/sg/products/devices/components	Korea Fujitsu Components Korea Limited Alpha Tower #403, 645 Sampyeong-dong, Bundang-gu, Seongnam-si, Gyeonggi-do, 13524 Korea Tel: (82) 31-708-7108 Fax: (82) 31-709-7108 Email: fcal@sg.fujitsu.com www.fujitsu.com/sg/products/devices/components/
North and South America Fujitsu Components America, Inc. 2290 North First Street, Suite 212 San Jose, CA 95131, USA Tel: (1-408) 745-4900 Fax: (1-408) 745-4970 Email: components@us.fujitsu.com Web: us.fujitsu.com/components	China Fujitsu Electronic Components (Shanghai) Co., Ltd. Unit 4306, InterContinental Center 100 Yu Tong Road, Shanghai 200070, China Tel: (86-21) 3253 0998 Fax: (86-21) 3253 0997 Email: fcal@sg.fujitsu.com Web: www.fujitsu.com/sg/products/devices/components	
Europe Fujitsu Components Europe B.V. Diamantlaan 25 2132 WV Hoofddorp Netherlands Tel: (31-23) 5560910 Fax: (31-23) 5560950 Email: info@fceu.fujitsu.com Web: www.fujitsu.com/uk/components	Hong Kong Fujitsu Components Hong Kong Co., Ltd. Unit 506, Inter-Continental Plaza No.94 Granville Road, Tsim Sha Tsui, Kowloon, Hong Kong Tel: (852) 2881-8495 Fax: (852) 2894-9512 Email: fcal@sg.fujitsu.com Web: www.fujitsu.com/sg/products/devices/components/	

©2016 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes.

The use of the contents, data and information provided in this datasheet is at the users' own risk.

Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability for any representation or warrant of any kind, express or implied, including warranties of any kind for merchantability or fitness for particular use, with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. September 07th, 2016

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Fujitsu:

[FTR-K4PC012W](#) [FTR-K4PC024W](#) [FTR-K4PB012W-ST](#) [FTR-K4PB024W-ST](#)