

3M™ Power Connectors for CompactPCI® Applications

3M is offering Power Connectors for CompactPCI Applications as an addition to our embedded computing product line. These connectors conform to PICMG® 2.11 R1.0 standard requirements. 3M will offer the backplane vertical socket and daughtercard right angle header with combined signal and power functionality.

(Note: The daughtercard vertical header is not being offered by 3M at this time.)



3M™ Power Connectors for CompactPCI® Applications

Features and Benefits

Designed to meet CompactPCI power interface specification PICMG 2.11 for zone 1 connector

Combines power and signal – 20 DC power contacts, 3 AC power contacts and 24 signal contacts

Eurocard form factors

Supports PICMG MicroTCA™ (AdvancedMC™ 1.0) specification

24 high-power contacts and 72 high-density signal contacts

Backplane and daughtercard versions

Provides redundant power and system management

Target Markets and Applications

Embedded PICMG 2.XX systems

Medical applications

Industrial control applications, railway

Instrumentation and control systems

Military/aerospace backplanes

The following parts are available as part of the 3M backplane connector product family:

Part Number	Description	Details	Customer Drawing	Mating Product
3P02-2001-XX	Power Backplane Female Connector, 47 Position	Press-Fit	TS-2370	3P01-200X-XX
3P02-2002-XX	Power Backplane Female Connector, 47 Position	Solder Tail	TS-2370	3P01-200X-XX
3P02-1001-XX	Power Backplane Female Connector, 38 Position	Press-Fit	TS-2372	3P01-100X-XX
3P02-1002-XX	Power Backplane Female Connector, 38 Position	Solder Tail	TS-2372	3P01-100X-XX
3P01-2002-XX	Power Right Angle Male Connector, 47 Position	Solder Tail	TS-2374	3P02-200X-XX
3P01-1002-XX	Power Right Angle Male Connector, 38 Position	Solder Tail	TS-2375	3P02-100X-XX



3M™ Power Connectors for CompactPCI® Applications

Product Specifications



Specifications	Product	Available upon request
	Signal Integrity Data	Available upon request
Materials	Contacts	Copper alloy, gold plating
	Platings	0.76µm Min Au 0.34µm Min Au 0.08µm Min Au Finish (1.27µm Min Ni Undercoat)
	Housings	Glass filled polyester (PBT)
	Temperature Rating	-40°C to 105°C
Electrical	Current Rating	DC output power 1 thru 20: 16 AMPs Input power 45,45,47: 23 AMPs
	Insulation Resistance	10 ¹⁰ Ohms
	Initial Contact Resistance	Power contact: 0.7 milliohms max Signal contact: 4.0 milliohms max
	Voltage Proof	1-20: 1500 VRMS 21-44: 1000 VRMS 45-47: 3000 VRMS

Additional Information


CompactPCI utilizes standard eurocard dimensions.

It is defined for both 3U (100 mm by 160 mm) and 6U (160 mm x 233 mm) card sizes:

Anatomy

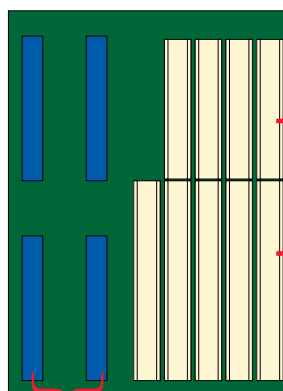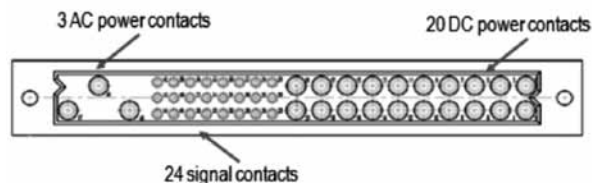

3U Backplane



cPCI Female Power Connectors

3M is a trademark of 3M Company.

PICMG and CompactPCI are registered trademarks of PICMG-PCI Industrial Computer Manufacturers Group, Inc.

Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

Warranty; Limited Remedy; Limited Liability.

This product will be free from defects in material and manufacture for a period of one year from the time of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any indirect, special, incidental or consequential loss or damage arising from this 3M product, regardless of the legal theory asserted.**



Electronic Solutions Division Interconnect Products

6801 River Place Blvd.
Austin, TX 78726-9000
1-800-225-5373
www.3Mconnectors.com

Please recycle. Printed in USA.
© 3M 2011. All rights reserved.
80-4000-7006-8

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[3M:](#)

[3P01-2002-ES](#) [3P02-2001-ES](#)