

# COMPACT POWER RELAY

## For automotive applications

### 1 POLE-25A (for 12V car battery)

## FTR-P3 Series

#### ■ FEATURES

- Compact for high density packaging
  - High contact capacity with proven contact material.  
(100,000 operations, 14 V, 25 A)
  - Coil power savings (600mW nominal achieved with state-of-the-art magnetic design)
  - Ease of PCB layout (all terminals on perimeter, coil and contact terminals separated)
  - Optional over-voltage circuit breaking capability  
(0.6mm gap, contact our representative)
  - Packaging for auto-insertion (tube packing, 30 relays/tube)
  - Application examples: power window, power seat, tilt steering, sunroof, wiper, retractable antenna, etc.
  - Reflowable & high stand-off type available.
  - RoHS compliant
- Please see page 7 for more information



#### ■ PARTNUMBER INFORMATION

[Example]	FTR-P3	C	N	012	W1	-06
	(a)	(b)	(c)	(d)	(e)	(f)

(a)	Relay type	FTR-P3	: FTR-P3 Series
(b)	Contact configuration	A	: 1 form A (only with -06)
		C	: 1 form C
(c)	Contact gap	N	: 0.25mm gap
		P	: 0.6mm gap (standard and -ML)
(d)	Coil rated voltage	012	: 9.....12VDC Coil rating table at page 3
(e)	Contact material	W1	: Silver-tin oxide indium
(f)	Special type	None	: Standard
		-ML	: Multi-layered contacts
		-06	: High stand-off (Reflowable type)

Actual marking does not carry the type name: "FTR (-ML) (-06)"  
 E.g.: Ordering code: FTR-P3CN012W1-06      Actual marking: P3CN012W1

# FTR-P3 SERIES

## ■ SPECIFICATION

Item			FTR-P3			
			Standard (without suffix)	Multi layered con- tact (-ML)	Reflowable (-06)	
Contact Data	Configuration		1 form C (SPDT)		1 form A (SPST)	1 form C (SPDT)
	Material		Silver-tin oxide indium			
	Contact path voltage drop		Max. 100mV at 1A, 12VDC			
	Contact rating		25A at 14VDC (locked motor load)			
	Max. carrying current * <sup>1</sup>		25A/1 hour (25 °C, 100% rated coil voltage)			
	Max. switching voltage		16VDC (reference)			
	Max. switching current		35A (reference)			
	Min. switching load * <sup>2</sup>		6VDC, 1A (reference)			
Life	Mechanical		Min. 10 x 10 <sup>6</sup> operations	Min. 1 x 10 <sup>6</sup> operations		
	Electrical		Min. 100 x 10 <sup>3</sup> operations, 14VDC, 25A (locked motor load) (1 operation = 1 forward and 1 reverse)			
Coil data	Operating ambient temperature range		-40 °C to +85 °C (no frost)		-40 °C to +125 °C (no frost)	
	Storage temperature range (no frost)		-40 °C to +85 °C, 45 ~ 85% RH	-40 °C to +100 °C, 45 ~ 85% RH	-40 °C to +125 °C, 45 ~ 85% RH	
Timing Data	Operate (at nominal voltage)		Max. 10 ms (without bounce)			
	Release (at nominal voltage)		Max. 5 ms (without bounce, no diode) Max. 15 ms (without bounce, with diode)			
Insulation	Resistance (initial)		100M Ω at 500VAC			
	Dielectric withstanding voltage (initial)		500VAC, 1 minute			
Other	Vibration resistance	Misoperation	10 to 200Hz, acceleration 43m/s <sup>2</sup> (4.4G), constant acceleration			
		Endurance	10 to 200Hz, acceleration 43m/s <sup>2</sup> (4.4G), constant acceleration			
	Shock	Misoperation	100m/s <sup>2</sup> minimum (11+/-1ms)			
		Endurance	1,000m/s <sup>2</sup> minimum (6+/-1ms)			
	Weight		Approximately 5 g			

\* 1 Need to consider the heat from PCB when max. current is more than 10A.

\* 2 Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

## ■ COIL RATING

FTR-P3 Series (0.25mm contact gap) (Standard, multi layered contact)

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance +/- 10% (Ohm)	Must Operate Voltage (VDC) *	Must Release Voltage (VDC) *
009	9	135	5.5 (at 20 °C)	0.7 (at 20 °C)
			6.9 (at 85 °C)	0.9 (at 85 °C)
010	10	167	6.3 (at 20 °C)	0.8 (at 20 °C)
			7.9 (at 85 °C)	1.0 (at 85 °C)
012	12	240	7.3 (at 20 °C)	1.0 (at 20 °C)
			9.2 (at 85 °C)	1.3 (at 85 °C)

FTR-P3-06 Series



Coil Code	Rated Coil Voltage (VDC)	Coil Resistance +/- 10% (Ohm)	Must Operate Voltage (VDC) *	Must Release Voltage (VDC) *
009	9	135	5.5 (at 20 °C)	0.7 (at 20 °C)
			6.9 (at 85 °C)	0.9 (at 85 °C)
			7.8 (at 125 °C)	1.0 (at 125 °C)
010	10	167	6.3 (at 20 °C)	0.8 (at 20 °C)
			7.9 (at 85 °C)	1.0 (at 85 °C)
			8.9 (at 125 °C)	1.1 (at 125 °C)
012	12	240	7.3 (at 20 °C)	1.0 (at 20 °C)
			9.2 (at 85 °C)	1.3 (at 85 °C)
			10.3 (at 125 °C)	1.4 (at 125 °C)

FTR-P3 Series (0.6mm contact gap) (Standard, multi layered contact)

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance +/- 10% (Ohm)	Must Operate Voltage (VDC) *	Must Release Voltage (VDC) *
009	9	100	5.5 (at 20 °C)	0.7 (at 20 °C)
			6.9 (at 85 °C)	0.9 (at 85 °C)
010	10	125	6.3 (at 20 °C)	0.8 (at 20 °C)
			7.9 (at 85 °C)	1.0 (at 85 °C)
012	12	167	7.3 (at 20 °C)	1.0 (at 20 °C)
			9.2 (at 85 °C)	1.3 (at 85 °C)

Note: All values in the tables are valid for 20°C and zero contact current, unless otherwise stated.  
Must operate voltages/must release voltages at 125degC are available only for reflowable type.  
\* Specified operate values are valid for pulse wave voltage.



## CHARACTERISTIC DATA

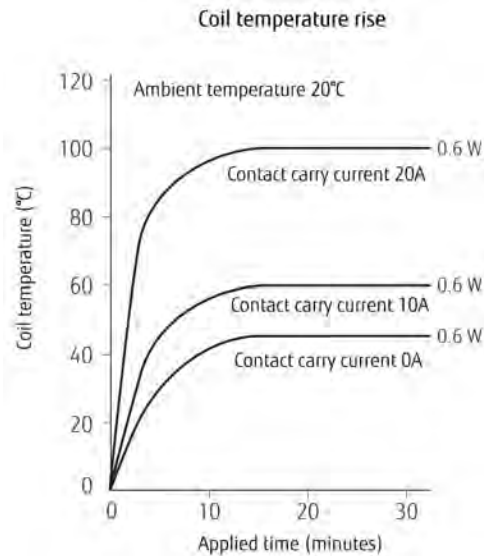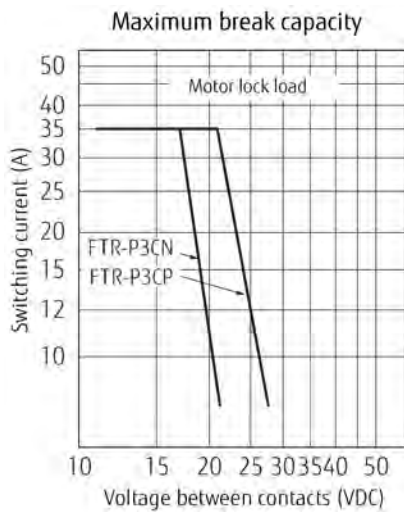



## Life test (examples)

Test condition  
25A, 14VDC  
motor lock  
100,000 operations min.  
0.25 seconds ON  
9.75 seconds OFF

Test circuit

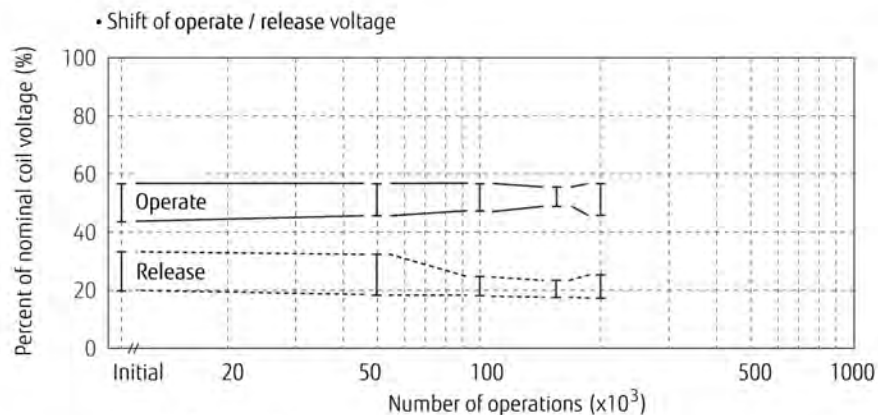


Current wave form

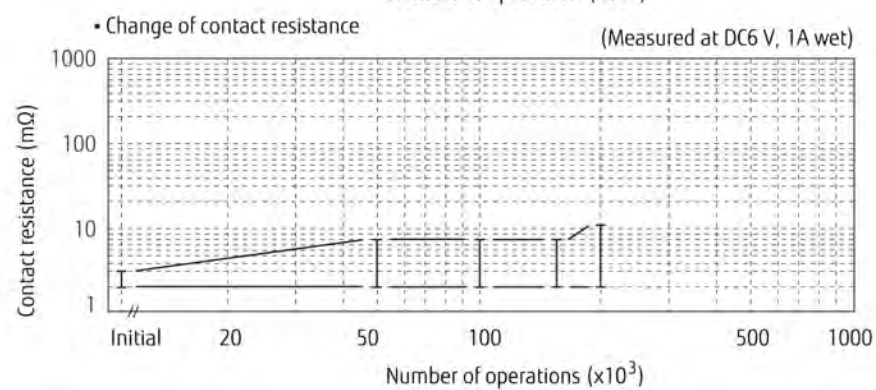


# FTR-P3 SERIES

Test condition  
Inrush current 17A, 14VDC  
motor free  
300,000 operations min.  
0.25 seconds ON  
9.75 seconds OFF


Test circuit



## • Shift of operate / release voltage

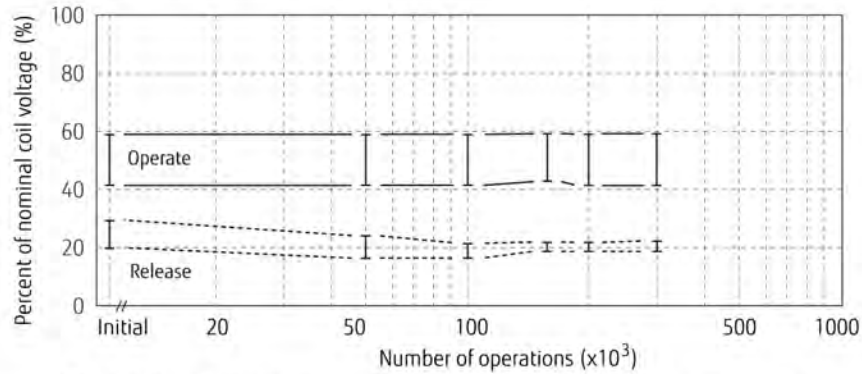


Current wave form




## • Change of contact resistance

(Measured at DC6 V, 1A wet)

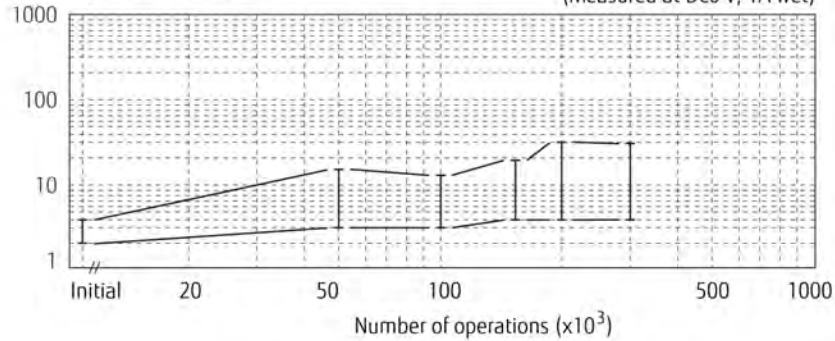


## Vibration resistance characteristics

Dual amplitude (mm)

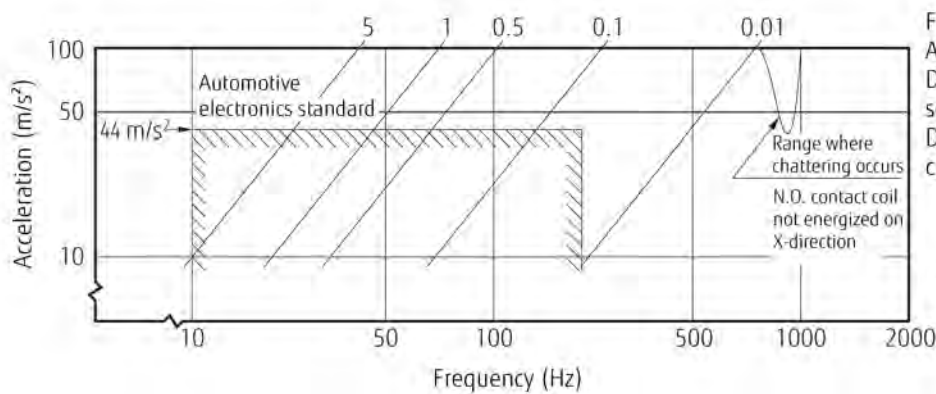


Frequency: 10~2000 Hz  
Acceleration: 100 m/s<sup>2</sup> max.  
Direction of vibration;  
see diagram below  
Detection level:  
chatter > 1ms




# FTR-P3 SERIES

Shock resistance characteristics

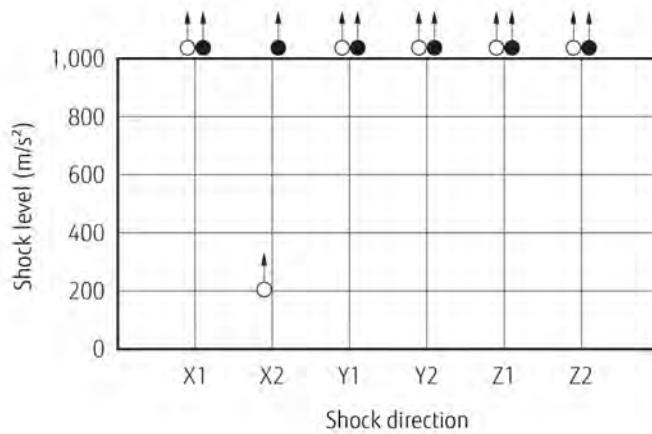


Shock application time:  $11 \pm 1$  ms, half-sine wave  
 Test material: coil energized and de-energized  
 Shock direction: see diagram below  
 Detection level: chatter > 1 ms




○ : break contact (coil de-energized)  
 ● : make contact (coil energized)


Operating coil voltage range  
 (Standard/Multi-layered contacts)

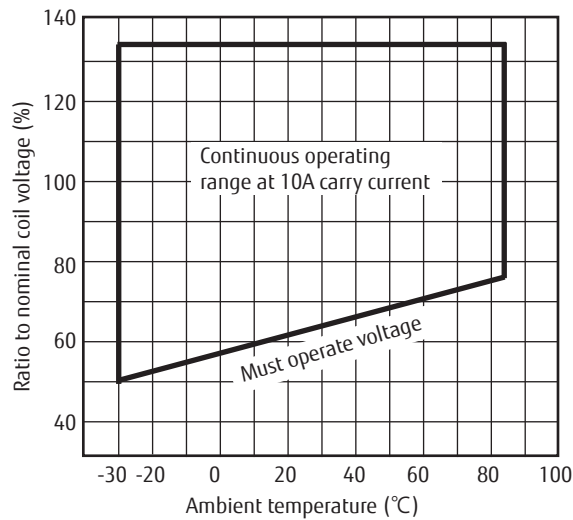


Operating coil voltage range  
 (Reflowable)

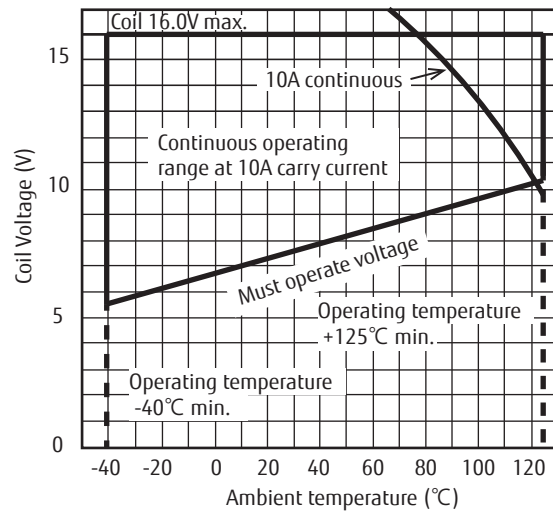


Distribution of operate/release voltage

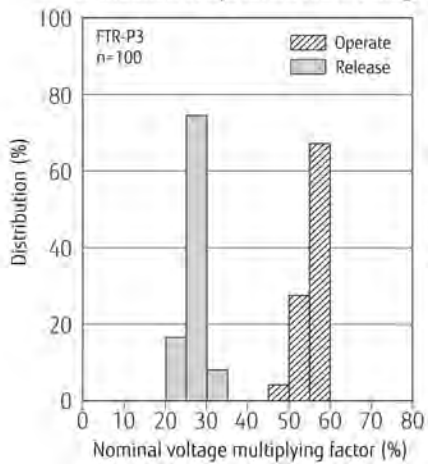

Distribution of operate/release time

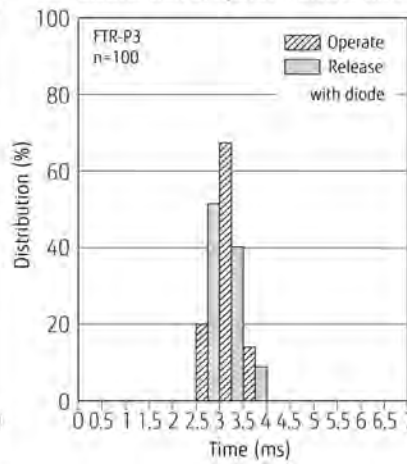


Distribution of contact resistance

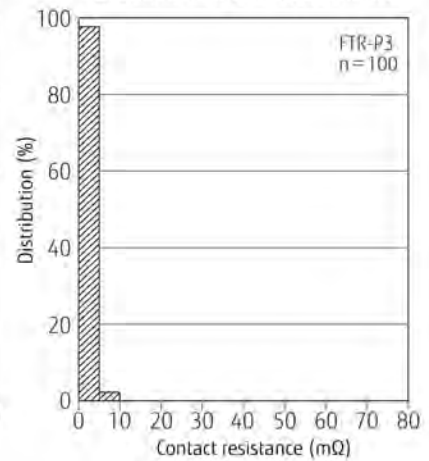


## ■ DIMENSIONS

Standard multi layered contact


FTR-P3 dimensions

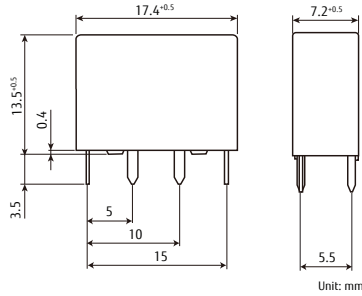

FTR-P3-06 dimensions




FTR-P3AN\*\*\*W1-06 (1 form A) dimensions




\* Dimensions of the terminals does not include thickness of pre-solder

## ● Schematics (BOTTOM VIEW)


FTR-P3CN\*\*\*W1(-ML)



FTR-P3CN\*\*\*W1-06 (1 form C)




FTR-P3AN\*\*\*W1-06 (1 form A)




## ● PC board mounting hole layout (Plated through hole) (BOTTOM VIEW)


FTR-P3CN\*\*\*W1(-ML)



FTR-P3CN\*\*\*W1-06 (1 form C)



FTR-P3AN\*\*\*W1-06 (1 form A)

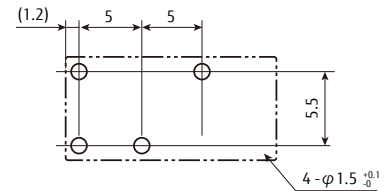

Tolerance: +0.1 / -0 mm unless otherwise specified  
unit: mm



## General Information

### 1. RoHS Compliance

- ┆ All relays produced by Fujitsu Components are compliant with RoHS directive 2011/65/EU including amendments.
- ┆ Use of Cadmium in electrical contacts is exempted as per Annex III of the RoHS directive 2001/65/EU. Please consider expiry date of exemption. Relays with Cadmium containing contacts are not to be used for new designs.
- ┆ All relays are lead-free. Please refer to Lead-Free Status Info for older date codes at:  
<http://www.fujitsu.com/downloads/MICRO/fcai/relays/lead-free-letter.pdf>


### 2. Recommended Lead Free Solder Condition

- ┆ Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.
- ┆ Recommended solder for assembly: Sn-3.0Ag-0.5Cu.

#### Flow Solder Condition:

Pre-heating: maximum 120°C within 90 sec.  
Soldering: dip within 5 sec. at 255°C ± 5°C solder bath  
Relay must be cooled by air immediately after soldering


#### Flow Solder Condition:

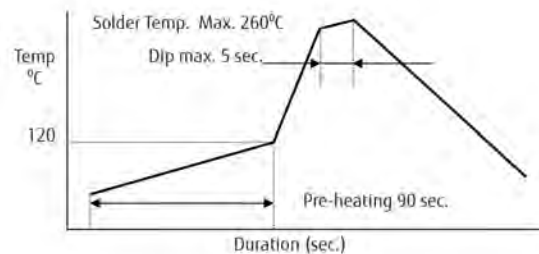

#### Solder by Soldering Iron:

Soldering Iron: 30-60W  
Temperature: maximum 350-360°C  
Duration: maximum 3 sec.

#### Reflow Solder Condition:

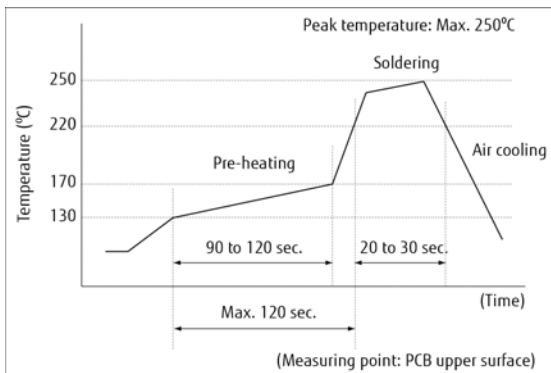

Note: Please do not reflow non-reflowable relays.

**We highly recommend that you confirm your actual solder conditions**

### 3. Moisture Sensitivity

- Moisture Sensitivity Level is not applicable, unless otherwise indicated.

### 4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.



## Fujitsu Components International Headquarter Offices

<b>Japan</b> Fujitsu Component Limited Shinagawa Seaside Park Tower 19F, 12-4, Higashi-shinagawa 4-chome, Shinagawa-ku, Tokyo, 140-0002, Japan Tel: (81-3) 3450-1682 Fax: (81-3) 3474-2385 Email: fcl-contact@cs.jp.fujitsu.com Web: www.fujitsu.com/jp/fcl/	<b>Asia Pacific</b> Fujitsu Components Asia, Ltd. 102E Pasir Panjang Road #01-01 Citilink Warehouse Complex Singapore 118529 Tel: (65) 6375-8560 Fax: (65) 6273-3021 Email: fcal@sg.fujitsu.com Web: www.fujitsu.com/sg/products/devices/components	<b>Korea</b> Fujitsu Components Korea Limited Alpha Tower #403, 645 Sampyeong-dong, Bundang-gu, Seongnam-si, Gyeonggi-do, 13524 Korea Tel: (82) 31-708-7108 Fax: (82) 31-709-7108 Email: fcal@sg.fujitsu.com www.fujitsu.com/sg/products/devices/components/
<b>North and South America</b> Fujitsu Components America, Inc. 2290 North First Street, Suite 212 San Jose, CA 95131, USA Tel: (1-408) 745-4900 Fax: (1-408) 745-4970 Email: components@us.fujitsu.com Web: us.fujitsu.com/components	<b>China</b> Fujitsu Electronic Components (Shanghai) Co., Ltd. Unit 4306, InterContinental Center 100 Yu Tong Road, Shanghai 200070, China Tel: (86-21) 3253 0998 Fax: (86-21) 3253 0997 Email: fcal@sg.fujitsu.com Web: www.fujitsu.com/sg/products/devices/components	
<b>Europe</b> Fujitsu Components Europe B.V. Diamantlaan 25 2132 WV Hoofddorp Netherlands Tel: (31-23) 5560910 Fax: (31-23) 5560950 Email: info@fceu.fujitsu.com Web: www.fujitsu.com/uk/components	<b>Hong Kong</b> Fujitsu Components Hong Kong Co., Ltd. Unit 506, Inter-Continental Plaza No.94 Granville Road, Tsim Sha Tsui, Kowloon, Hong Kong Tel: (852) 2881-8495 Fax: (852) 2894-9512 Email: fcal@sg.fujitsu.com Web: www.fujitsu.com/sg/products/devices/components/	

©2016 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes.

The use of the contents, data and information provided in this datasheet is at the users' own risk.

Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability for any representation or warrant of any kind, express or implied, including warranties of any kind for merchantability or fitness for particular use, with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. July 20<sup>th</sup>, 2016

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Fujitsu:

[FTR-P3CN009W1-01](#) [FTR-P3AN009W1-06](#) [FTR-P3AN010W1-06](#)