


TW

Hybrid D'Sub series

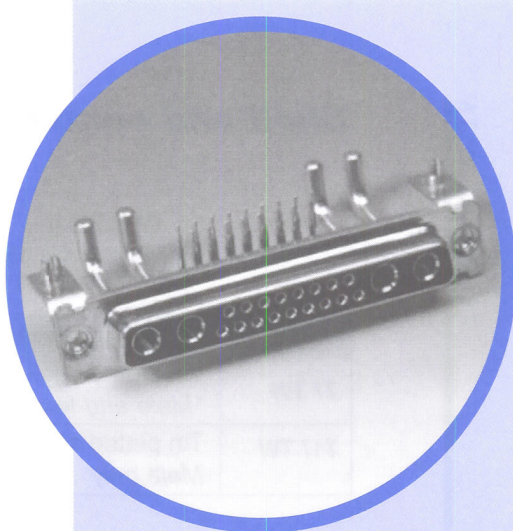


CONTENT

Specifications

- Connectors according to: MIL C24308 - NFC93425 - HE507

Materials and platings		Electrical Data	
Shells	Steel-Tin plating	Current rating	
Insulators	High temperature black thermoplastic	Signal contacts	7.5 A. with 10 A. peaks
Signal contacts	Female: machined bronze	Power contacts	
Material	Male: machined brass	PCB terminations	10 to 40 A.
Plating finish	16μ "Au over 79μ" Ni min.	Solder cup terminations	10 to 40 A.
Or	30μ "Au over 79μ" Ni min.	Crimp terminations	10 to 40 A.
Shielded contacts	Female: machined bronze	Shielded contacts	0.5 A.
Material	Male: machined brass	Voltage rating	
Plating		Signal and power contacts	300 V.R.M.S. at 50 Hz
Inner conductor	16μ "Au or 30μ Au over 79μ" Ni	Shielded contacts	150 V.R.M.S. at 50 Hz
Outer ring	10μ "Au over 79μ" Ni	Shielded contacts	
Terminations	Tinned	Frequency range	0-1 GHz
Except solder cup and crimp terminations	gold flash	Attenuation	0.2dB
Power contacts	Female: machined bronze	V. S. W. R.	1.4(+0.04/GHz)
Material	Male: machined brass	Characteristic impedance	50 Ohms
Plating		Dielectric withstanding voltage	≥ 1000 V.R.M.S. at 50Hz
Contacts	16μ "Au or 30μ" Au over 79μ" Ni	Insulation resistance	≥ 5000 M Ohms at 500 VDC
Terminations	Tinned	Contact resistance	≤ 5m Ohms
Except solder cup and crimp terminations	gold flash	Shell resistance (electrical grounding)	≤ 1m Ohm
Brackets	Steel-Tin plating		
Front jackscrews	Brass-Tin plating		
Rear clinch nuts	Brass-Tin plating		
Boardlocks	Bronze-Tin plating		
Stand-off	Brass-Tin plating		

Climatic Data		Mechanical data	
Operating temperature	-55°C + 155°C (with peaks up to 180°C)	Shells	With or without dimples
Damp heat	56 days (40°C - 95% HR)	Contact retention force in dielectric material	> 40N
Salt spray	48 hours	Maximum mating and unmating force	
		With dimples	E size = 70 N A size = 80 N B size = 100 N C size = 150 N D size = 180 N
		Without dimples	E size = 30 N A size = 50 N B size = 80 N C size = 120 N D size = 160 N
		Compatible with process	
		IR - Air convectioned	260° for 20 s.
		Resistance to solder iron heat	260°C for 30 s.
		Mating cycles	≥ 200 (classe II) or 500 (classe I)
		Blind mating system	Available upon request
		Polarization	Available with locking accessories Consult factory

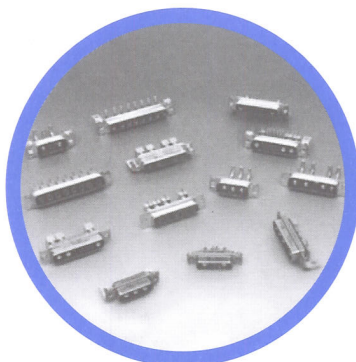

DESCRIPTION

Amphenol D'Sub TW Hybrid Series permits a mix of contacts including signal, power, shielded, high voltage and fiber optics in the same housing with 18 different contacts arrangements.

This economic series was first developed from our military series, and has improved features:

- new contacts
- new high temperature black thermoplastic insert
- PCB configurations come preloaded with fixed contacts and brackets.

These connectors are supplied with screw machined contacts which are fixed in the insulator.


A complete range of housings are also available for cable application.

A full range of arrangements compatible with reflow process

APPLICATIONS

- Commercial
- Medical
- Industrial
- Telecom
- Any application requiring optimization of space

TW / E1



Amphenol

Shell and contacts plating

CLASS II

0.4µm (16µ") Au contacts gold plating
200 mating cycles

Types	Shells and plating
77 TW	Tin plated shell *Male and female
717 TW	Tin plated shell with dimples Male only










CLASS I

0.76µm (30µ") Au contacts gold plating
500 mating cycles


Types	Shells and plating
177 TW	Tin plated shell *Male and female
777 TW	Tin plated shell with dimples Male only

Housing arrangements

Male front view

Arrangement Shell size	 5W1 E	 7W2 A	 11W1 A
Arrangement Shell size	 3W3 A	 5W5 B	 9W4 B
Arrangement Shell size	 13W3 B	 17W2 B	 21W1 B
Arrangement Shell size	 27W2 C	 13W6 C	 17W5 C
Arrangement Shell size	 21W4 C	 8W8 C	 25W3 C
Arrangement Shell size	 24W7 D	 36W4 D	 43W2 D


Shell size dimensions

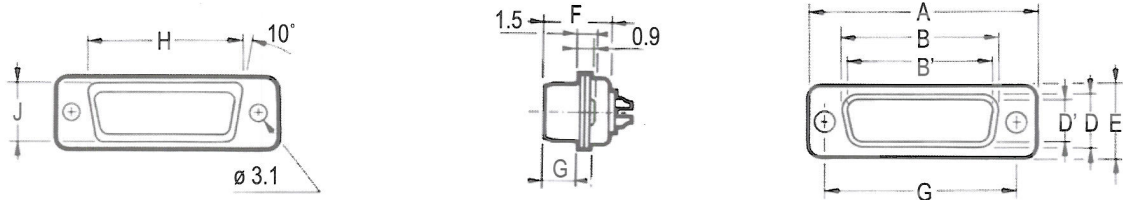


Shell size	Contact P: Pin S: Socket	A ±0.25 (±.010)	B 0/-0.20 (0/- .008)	B' +0.20/0 (+.008/0)	C ±0.10 (±.004)	D 0/-0.25 (0/- .010)	D' +0.25/0 (+.010/0)	E ±0.20 (±.008)	F +0.05/-0.20 (+.002/- .008)	F' +0.10/-0.20 (+.004/- .008)	G +0.10/-0.20 (+.004/- .008)	G' ±0.10 (±.004)	H +0.10/-0.40 (+.004/- .016)	J 0/-0.50 (0/- .020)
E	P	30.7 (1.209")		16.8 (.661")	25.0 (.984")		8.2 (.323")	12.4 (.488")		10.9 (.429")		5.9 (.232")	19.4 (.764")	11.0 (.433")
	S		16.4 (.646")			8.0 (.315")			11.1 (.437")		6.2 (.244")			
A	P	39.0 (1.535")		25.1 (.988")	33.3 (1.311")		8.2 (.323")	12.4 (.488")		10.9 (.429")		5.9 (.232")	27.7 (1.091")	11.0 (.433")
	S		24.8 (.976")			8.0 (.315")			11.1 (.437")		6.2 (.244")			
B	P	52.9 (2.083")		38.8 (1.528")	47.0 (1.850")		8.2 (.323")	12.4 (.488")		11.0 (.433")		5.8 (.228")	41.4 (1.630")	11.0 (.433")
	S		38.5 (1.513")			8.0 (.315")			11.1 (.437")		6.2 (.244")			
C	P	69.2 (2.724")		55.3 (2.177")	63.5 (2.500")		8.2 (.323")	12.4 (.488")		11.0 (.433")		5.8 (.228")	57.9 (2.280")	11.0 (.433")
	S		54.9 (2.161")			8.0 (.315")			11.1 (.437")		6.2 (.244")			
D	P	66.8 (2.630")		52.7 (2.075")	61.1 (2.406")		11.0 (.433")	15.2 (.598")		11.0 (.433")		5.8 (.228")	55.5 (2.185")	13.8 (.543")
	S		52.5 (2.067")			10.9 (.429")			11.1 (.437")		6.2 (.244")			

Panel cutouts

Optimal cutout for rear mounting

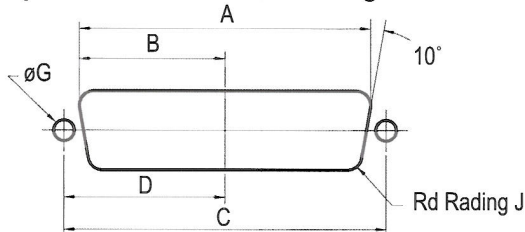


Standard cutout

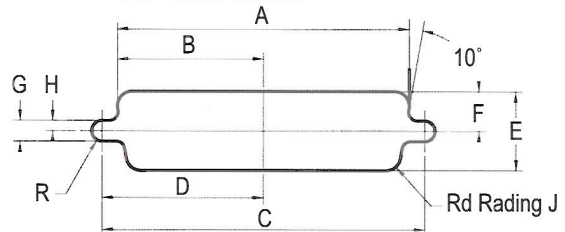

Shell size	Mounting method	A ±0.20 (±.008)	B ±0.20 (±.008)	C ±0.20 (±.008)	D ±0.20 (±.008)	E ±0.20 (±.008)	F ±0.20 (±.008)	G ±0.20 (±.008)	H ±0.20 (±.008)	J ±0.20 (±.008)
E	Front	22.2 (.874")	11.1 (.437")	25.0 (.984")	12.5 (.492")	13.0 (.512")	6.5 (.256")	3.0 (.118")	1.5 (.059")	2.1 (.083")
	Rear	20.5 (.807")	10.2 (.402")							
A	Front	30.5 (1.201")	15.3 (.602")	33.3 (1.311")	16.7 (.657")	13.0 (.512")	6.5 (.256")	3.0 (.118")	1.5 (.059")	2.1 (.083")
	Rear	28.8 (1.134")	14.4 (.567")							
B	Front	44.3 (1.744")	22.1 (.870")	47.0 (1.850")	23.5 (.925")	13.0 (.512")	6.5 (.256")	3.0 (.118")	1.5 (.059")	2.1 (.083")
	Rear	42.5 (1.673")	21.3 (.839")							
C	Front	60.7 (2.390")	30.4 (1.197")	63.5 (2.500")	31.7 (1.248")	13.0 (.512")	6.5 (.256")	3.0 (.118")	1.5 (.059")	2.1 (.083")
	Rear	59.1 (2.327")	29.5 (1.161")							
D	Front	58.3 (2.295")	29.2 (1.150")	61.1 (2.406")	30.6 (1.205")	15.8 (.622")	7.9 (.311")	3.0 (.118")	1.5 (.059")	2.1 (.083")
	Rear	56.3 (2.217")	28.2 (1.110")							

Straight connector footprint

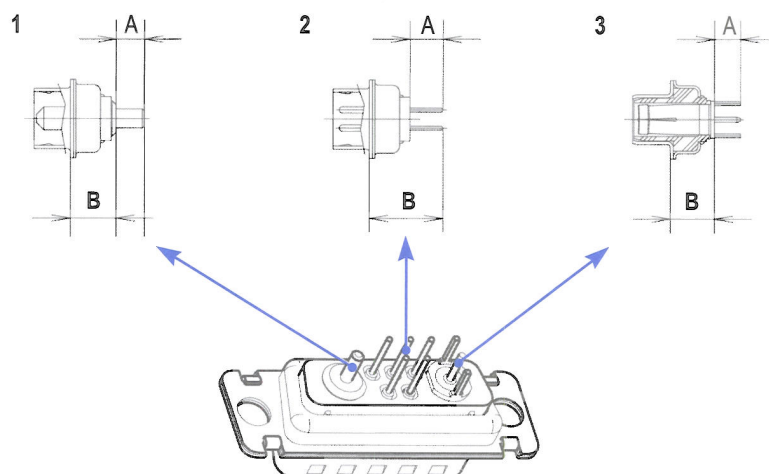

Signal tail 0.6 mm Dia. (.0236")
1.6 mm (.063")PCB
For other PCB thickness: consult factory.

Description		Dimensions	
		a	b
Power (.126" tail dia.)	1	4.80 mm (.198")	7.2 mm (.283")
Power (.0787" tail dia.)	1	4.80 mm (.198")	7.2 mm (.283")
Shielded	3	4.00 mm (.157")	7.2 mm (.283")
Signal	2	5.00 mm (.196")	11.50 mm (.453")

Straight contact combinations


Arrangement with signal contacts

See above dimensions	Size 8 and 20 Contacts
↓	
P 3SY	Power 3.2 mm DIA. (.126") (20 to 40 A) and signal
P 2SY	Power 2 mm DIA. (.0787") (10 to 20 A) and signal
CSY	Shielded and signal
SY	Signal only
No reference	Signal (Size 20) with solder cup terminations Housing preloaded with contacts

Arrangement without signal contacts 3W3 - 5W5 - 8W8

See above dimensions	Size 8 Contacts
↓	
P 3Y	Power only 3.2 mm DIA. (.126") (20 to 40 A)
P 2Y	Power only 2 mm DIA. (.0787") (10 to 20 A)
CY	Shielded only

Right angle connector footprint

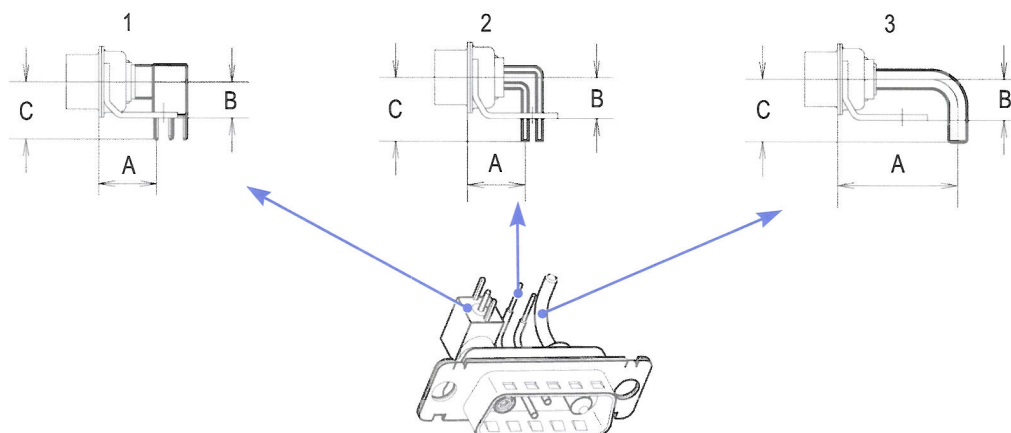

Signal tail 0.6 mm Dia. (.0236")
1.6 mm (.063") PCB
For other PCB thickness: consult factory.

Description		Europe			Mix			MIL		
		HE 5 pattern = - Europ. height - Europ. footprint pitch between 2 rows: .100"			Mixed pattern = - MIL height - Europ. footprint pitch between 2 rows: .100"			MIL pattern = - MIL height - MIL footprint pitch between 2 rows: .112"		
		a	b	c	a	b	c	a	b	c
Shielded	1	-	-	-	10.30mm (.406")	6.30mm (.248")	10.00mm (.394")	10.30mm (.406")	6.30mm (.248")	10.00mm (.394")
Signal	2	10.30mm (.406")	7.20mm (.283")	11.20mm (.441")	10.30mm (.406")	6.30mm (.248")	9.50mm (.374")	8.10mm (.319")	6.30mm (.248")	9.50mm (.374")
Power (.0787" tail dia.)	3	11.57mm (.456")	7.20mm (.283")	10.50mm (.413")	11.57mm (.456")	6.30mm (.248")	9.50mm (.374")	9.52mm (.375")	6.30mm (.248")	9.50mm (.374")
Power (.126" tail dia.)	3	21.46mm (.845")	7.20mm (.283")	10.50mm (.413")	21.46mm (.845")	6.30mm (.248")	9.50mm (.374")	21.46mm (.845")	6.30mm (.248")	9.50mm (.374")

Note: above dimensions correspond to sizes E to C. Consult factory for D sizes.
Connector comes equipped with contacts and brackets.

Right angle contacts combinations

Arrangement with signal contacts

European footprint	Mixed footprint	MIL (U.S.) footprint	Size 8 and 20 Contacts
EP3SV	HP3SV	MP3SV	Power 3.2 mm DIA. (.126") (20 to 40 A) and signal
EP2SV	HP2SV	MP2SV	Power 2 mm DIA. (.0787") (10 to 20 A) and signal
-	HCSV	MCSV	Shielded and signal
ESV	HSV	MSV	Signal only

Arrangement without signal contacts 3W3 - 5W5 - 8W8


European footprint	Mixed footprint	MIL (U.S.) footprint	Size 8 contacts only
EP3V	HP3V	MP3V	Power only 3.2 mm DIA. (.126") (20 to 40 A)
EP2V	HP2V	MP2V	Power only 2.0 mm DIA. (.0787") (10 to 20 A)
-	HCV	MCV	Shielded only

Mounting options


Right angle version

Connectors come equipped with metal brackets

BLANK: 3.10mm (.122") dia mounting hole

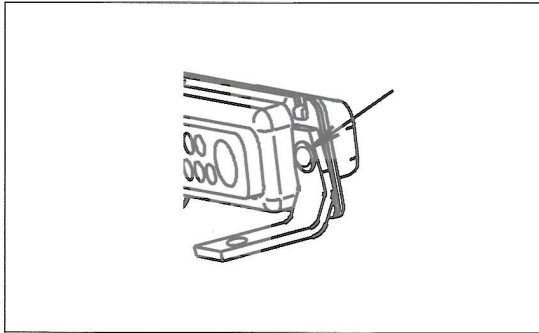


RM6: metal brackets + boardlock

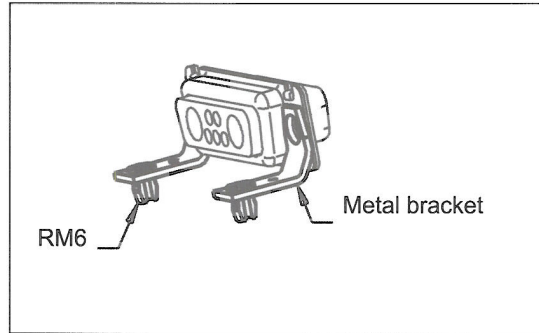


Straight version

BLANK: 3.10mm (.122") dia mounting hole

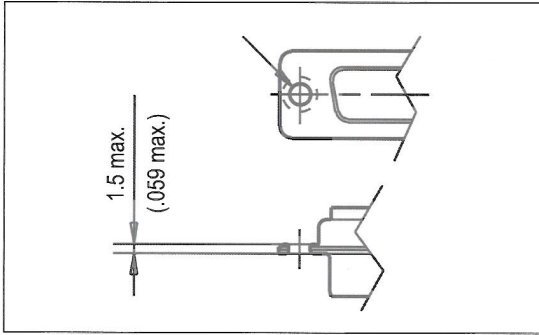

RM54: RM5 4.40 threaded


RM53: RM5 M3 threaded

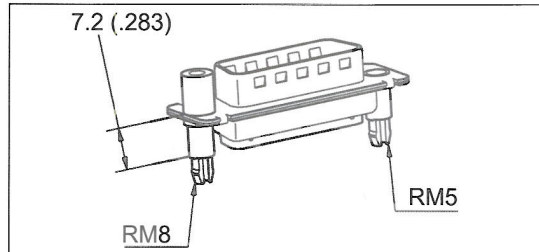


RM84: RM8 4.40 threaded

RM83: RM8 M3 threaded

A514: blind mating system

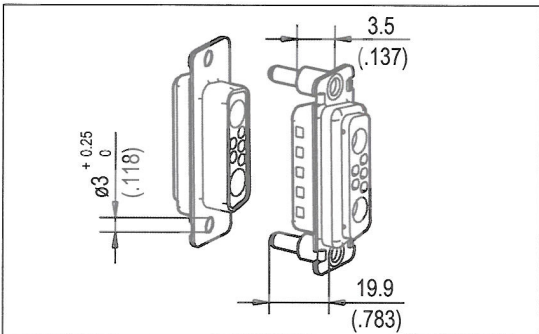


FM: float mounting system

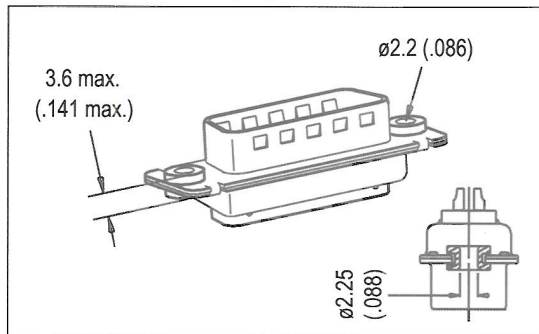

Straight and right angle version


4R: 4.40 rear nut

3R: M3 rear nut

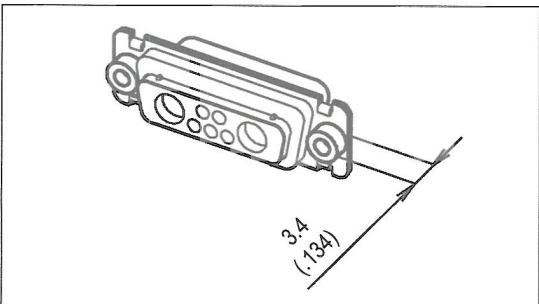


4F: 4.40 front female screwlock



3F: M3 front female screwlock

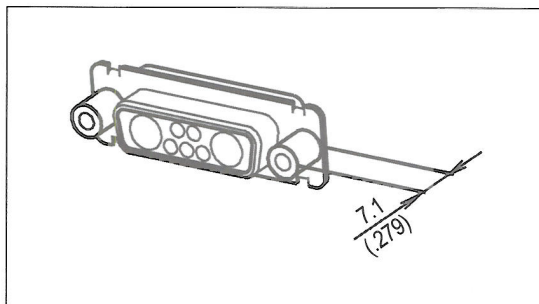

High power contacts

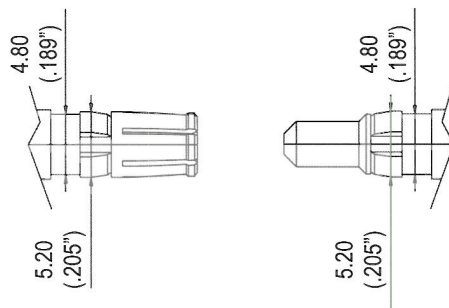



Solder cup version

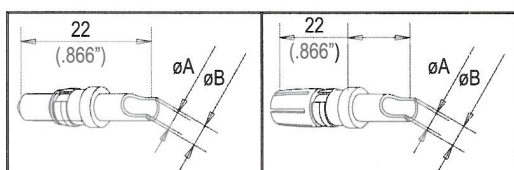

P/N		Current	Dimensions	
Plug	Socket		A mm (inch)	B mm (inch)
L 17DM 53745-8	L 17DM 53744-7	10 to 20 Amp.	1.80 (.071")	2.55 (.100")
L 17DM 53745-7	L 17DM 53744-6	20 to 30 Amp.	2.80 (.110")	3.70 (.145")
L 17DM 53745-1	L 17DM 53744-1	30 to 40 Amp.	4.80 (.189")	5.60 (.220")

Trim dimensions: 7.5 mm (.295")

Crimp version

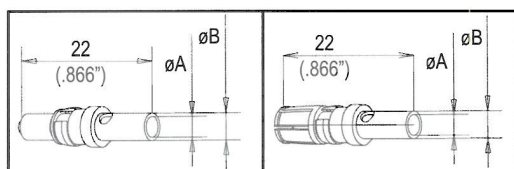

P/N		Current	Dimensions	
Plug	Socket		A mm (inch)	B mm (inch)
L 17DM 53745-208	L 17DM 53744-207	10 to 20 Amp.	1.80 (.071")	2.55 (.100")
L 17DM 53745-207	L 17DM 53744-206	20 to 30 Amp.	2.80 (.110")	3.70 (.145")
L 17DM 53745-201	L 17DM 53744-201	30 to 40 Amp.	4.80 (.189")	5.60 (.220")

Trim dimensions: 7.5 mm (.295")

Crimping tool for all sizes
L17D479SP






Extraction tool for sizes 8 cts






Straight shielded contacts

Crimp ferrule and inner solder



Type	P/N	Dimensions (inch)			Cable - RG	Trim dimensions (inch)		
		A Max	B	D		E	F	G
plug	L17DM 53740	18.8 (740")	23.6 (.929")	1.0 (.039")	178 B/U	7.9 (.311")	6.3 (.248")	2 (.078")
plug	L17DM 53740-1	18.8 (740")	23.6 (.929")	1.7 (.066")	179 B/U 316 B/U	7.9 (.311")	6.3 (.248")	2 (.078")
plug	L17DM 53740-3	21.5 (846")	23.6 (.929")	2.8 (.110")	180 B/U	9.5 (.374")	7.9 (.311")	2 (.078")
plug	L17DM 53740-5	21.5 (846")	23.6 (.929")	3.2 (.126")	58 C/U	9.5 (.374")	7.9 (.311")	2 (.078")
socket	L17DM 53742	18.8 (740")	23.6 (.929")	1.0 (.039")	178 B/U	7.9 (.311")	6.3 (.248")	2 (.078")
socket	L17DM 53742-1	18.8 (740")	23.6 (.929")	1.7 (.066")	179 B/U 316 B/U	7.9 (.311")	6.3 (.248")	2 (.078")
socket	L17DM 53742-3	21.5 (846")	23.6 (.929")	2.8 (.110")	180 B/U	9.5 (.374")	7.9 (.311")	2 (.078")
socket	L17DM 53742-5	21.5 (846")	23.6 (.929")	3.2 (.126")	58 C/U	9.5 (.374")	7.9 (.311")	2 (.078")




Ferrule and inner solder



Type	P/N	Dimensions (inch)			Cable - RG	Trim dimensions (inch)		
		A Max	B	D		E	F	G
short plug	L17DM 53740-5000	17.0 (669")	21.8 (.858")	1.0 (.039")	178 B/U	7.9 (.311")	6.3 (.248")	2 (.078")
plug	L17DM 53740-5001	18.8 (740")	23.6 (.929")	1.7 (.066")	179 B/U 316 B/U	7.9 (.311")	6.3 (.248")	2 (.078")
plug	L17DM 53740-5002	21.5 (846")	26.3 (1.035")	2.8 (.110")	180 B/U	9.5 (.374")	7.9 (.311")	2 (.078")
plug	L17DM 53740-5005	21.5 (846")	26.3 (1.035")	3.2 (.126")	58 C/U	9.5 (.374")	7.9 (.311")	2 (.078")
plug	L17DM 53740-5008	18.8 (740")	23.6 (.929")	1.0 (.039")	178 B/U	7.9 (.311")	6.3 (.248")	2 (.078")
short socket	L17DM 53742-5000	17.0 (669")	21.8 (.858")	1.0 (.039")	178 B/U	7.9 (.311")	6.3 (.248")	2 (.078")
socket	L17DM 53742-5001	18.8 (740")	23.6 (.929")	1.7 (.066")	179 B/U 316 B/U	7.9 (.311")	6.3 (.248")	2 (.078")
socket	L17DM 53742-5002	21.5 (846")	26.3 (1.035")	2.8 (.110")	180 B/U	9.5 (.374")	7.9 (.311")	2 (.078")
socket	L17DM 53742-5004	21.5 (846")	26.3 (1.035")	3.2 (.126")	58 C/U	9.5 (.374")	7.9 (.311")	2 (.078")
socket	L17DM 53742-50060	18.8 (740")	23.6 (.929")	1.0 (.039")	178 B/U	7.9 (.311")	6.3 (.248")	2 (.078")




Right angled shielded contact

Crimp ferrule and inner solder



Type	P/N	Dimensions (inch)			Cable - RG	Trim dimensions (inch)		
		A Max	B	D		E	F	G
plug	L17DM 53741	13.5 (.531")	18.6 (.732")	1.0 (.039")	178 B/U	9.5 (.374")	5.9 (.232")	1.6 (.062")
plug	L17DM 53741-1	13.5 (.531")	18.6 (.732")	1.7 (.066")	179 B/U 316 B/U	9.5 (.374")	5.9 (.232")	1.6 (.062")
plug	L17DM 53741-3	13.5 (.531")	18.6 (.732")	2.8 (.110")	180 B/U	10.7 (.421")	7.9 (.311")	2.4 (.094")
plug	L17DM 53741-4	13.5 (.531")	18.6 (.732")	3.2 (.126")	58 C/U	10.7 (.421")	7.9 (.311")	2.4 (.094")
socket	L17DM 53743-2	13.5 (.531")	18.6 (.732")	1.0 (.039")	178 B/U	9.5 (.374")	5.9 (.232")	1.6 (.062")
socket	L17DM 53743-3	13.5 (.531")	18.6 (.732")	1.7 (.066")	179 B/U 316 B/U	9.5 (.374")	5.9 (.232")	1.6 (.062")
socket	L17DM 53743-5	13.5 (.531")	18.6 (.732")	2.8 (.110")	180 B/U	10.7 (.421")	7.9 (.311")	2.4 (.094")
socket	L17DM 53743-6	13.5 (.531")	18.6 (.732")	3.2 (.126")	58 C/U	10.7 (.421")	7.9 (.311")	2.4 (.094")

Ferrule and inner solder



Type	P/N	Dimensions (inch)			Cable - RG	Trim dimensions (inch)		
		A Max	B	D		E	F	G
plug	L17DM 53741-5000	13.5 (.531")	18.6 (.732")	1.0 (.039")	178 B/U	9.5 (.374")	5.9 (.232")	1.6 (.062")
plug	L17DM 53741-5001	13.5 (.531")	18.6 (.732")	1.7 (.066")	179 B/U 316 B/U	9.5 (.374")	5.9 (.232")	1.6 (.062")
plug	L17DM 53741-5003	13.5 (.531")	18.6 (.732")	2.8 (.110")	180 B/U	10.7 (.421")	7.9 (.311")	2.4 (.094")
plug	L17DM 53741-5004	13.5 (.531")	18.6 (.732")	3.2 (.126")	58 C/U	10.7 (.421")	7.9 (.311")	2.4 (.094")
socket	L17DM 53743-5000	13.5 (.531")	18.6 (.732")	1.0 (.039")	178 B/U	9.5 (.374")	5.9 (.232")	1.6 (.062")
socket	L17DM 53743-5001	13.5 (.531")	18.6 (.732")	1.7 (.066")	179 B/U 316 B/U	9.5 (.374")	5.9 (.232")	1.6 (.062")
socket	L17DM 53743-5003	13.5 (.531")	18.6 (.732")	2.8 (.110")	180 B/U	10.7 (.421")	7.9 (.311")	2.4 (.094")
socket	L17DM 53743-5004	13.5 (.531")	18.6 (.732")	3.2 (.126")	58 C/U	10.7 (.421")	7.9 (.311")	2.4 (.094")

Crimping tool

Hand crimp tool

227-0944 (without dies) (M 22 520/5-01)

RG cables	MIL reference	Amphenol P/N	dim. between 2 flat surface	
			cavity A	cavity B
RG 58 C/U	M 22 520/5-05	227 1221-05	5.41	-
RG 178 B/U	M 22 520/5-03	227 1221-03	-	2.67
RG 179 B/U	M 22 520/5-03	227 1221-03	3.25	-
RG 180 B/U	M 22 520/5-05	227 1221-05	-	4.52

Extraction tool

Extraction tool for sizes 8 cts



L17D429SP



Cabling instructions for shielded contacts



Straight crimp shielded contacts:

inner solder contact
outer crimp contact

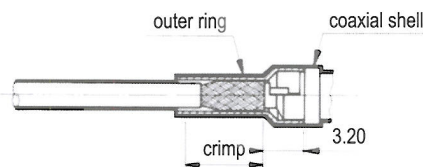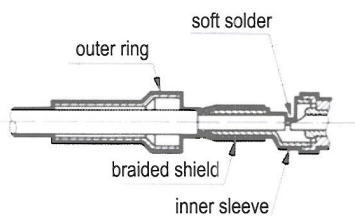

Right angle crimp shielded contacts:



inner solder contact
outer crimp contact

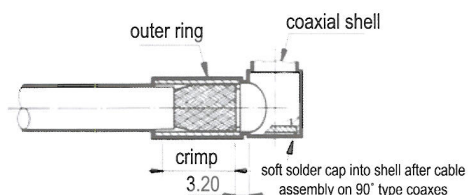



Assembly method

- Slide the outer ring over the cable jacket. Trim the cable according to the recommended dimensions.
- Insert the cable dielectric and the center conductor inside the inner sleeve.
- Solder the central conductor to the shielded center contacts.
- Slide the outer ring towards the inner sleeve and recover the braid.
- Using crimp hand tool equipped with the appropriate dies, crimp in the area defined.

Solder straight shielded contacts:

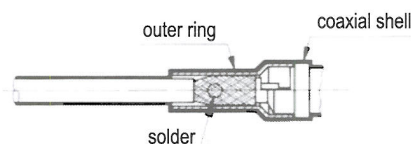

Solder right angle shielded contacts:

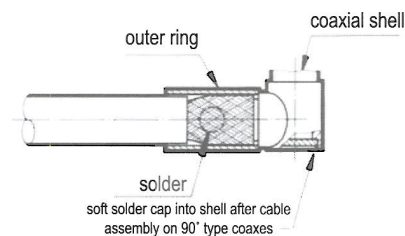

Assembly method

- Slide the outer ring over the cable jacket. Trim the cable according to the recommended dimensions.
- Insert the cable dielectric and the center conductor inside the inner sleeve.
- Solder the central conductor to the shielded center contacts.
- Slide the outer ring towards the inner sleeve and recover the braid.
- Solder by introducing metal through the outer ring hole.

How to build your part number

L

RoHS Compliant

Contacts and Shell

Contact Plating	Shell	
	Tinned	Tinned & Indents; Plug only
0.4µm(16µ") Au	77	717
0.76µm(30µ") Au	177	777

Shell size and Configuration:
 E5W1, A3W3, A7W2, A11W1, B5W5, B9W4, B13W3,
 B17W2, B21W1, C8W8, C13W6, C17W5, C21WA4
 C25W3, C27W2, D24W7, D36W4, D43W2

Gender:
 P: Pin
 S: Socket

Contacts:
For straight
 BLANK: Solder-cup signal contacts only
 P3SY: 20-40 Amp power & signal mix
 P2SY: 10-20 Amp power & signal mix
 CSY: Coax & signal mix
 SY: Signal only
 P3Y: 20-40 Amp power only (3W3, 5W5, 8W8)
 P2Y: 10-20 Amp power only (3W3, 5W5, 8W8)
 CY: Coax only (3W3, 5W5, 8W8)

For right angle
 MP3SV: US Footprint, 20-40 Amp power & signal mix
 MP2SV: US Footprint, 10-20 Amp power & signal mix
 MCSV: US Footprint, Coax & signal mix
 MSV: US Footprint, Signal only
 MP3V: US Footprint, 20-40 Amp power only (3W3, 5W5, 8W8)
 MP2V: US Footprint, 10-20 Amp power only (3W3, 5W5, 8W8)
 MCV: US Footprint, Coax only (3W3, 5W5, 8W8)
 EP3SV: European Footprint, 20-40 Amp power & signal mix
 EP2SV: European Footprint, 10-20 Amp power & signal mix
 ESV: European Footprint, Signal only
 EP3V: European Footprint, 20-40 Amp power only (3W3, 5W5, 8W8)
 EP2V: European Footprint, 10-20 Amp power only (3W3, 5W5, 8W8)
 HP3SV: Mixed Footprint, 20-40 Amp power & signal mix
 HP2SV: Mixed Footprint, 10-20 Amp power & signal mix
 HCSV: Mixed Footprint, Coax & signal mix
 HSV: Mixed Footprint, Signal only
 HP3V: Mixed Footprint, 20-40 Amp power only (3W3, 5W5, 8W8)
 HP2V: Mixed Footprint, 10-20 Amp power only (3W3, 5W5, 8W8)
 HCV: Mixed Footprint, Coax only (3W3, 5W5, 8W8)

... TW ...

Special Deviations
Please consult factory

Board Mounting Options
For Straight
 Blank: .120"(3.05mm) Clear Hole
 RM53: M3 Threaded (panel side)
 standoff with boardlock
 RM54: 4-40UNC Threaded (panel side)
 standoff with boardlock
 RM84: Non-Removable M3 screwlock,
 with standoff and boardlock
For Right Angle
 RM6: Metal bracket with boardlocks

Panel Mounting Options
For right angle & cable mount
 Blank: .120"(3.05mm) Clear Hole
 3F: M3 Front Screwlock
 3R: M3 Rear Threaded Insert
 4F: #4-40 Front Screwlock
 4R: #4-40 Threaded Rear Insert
 FM: Float mount system
 A514: Blind Mate Guide Pin

[illegible]

<http://www.dsubconnector.com>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Amphenol:

[L177TWA3W3SMP2V4FRM6](#) [L177TWA3W3SMP3V4RRM6](#) [L177TWB21W1PSY](#) [L177TWB5W5SMCVRM6](#)
[L177TWB5W5SP2Y](#) [L177TWB9W4SESV4RRM6](#) [L177TWC17W5S](#) [L177TWC17W5SSY](#)
[L177TWC21WA4SMCSVRM6](#) [L177TWC8W8PMCV4FRM6](#) [L177TWC8W8SMCV3FRM6](#) [L177TWC8W8SP2Y](#)
[L177TWC8W8SP3Y](#) [L177TWD24W7PP3SYRM54](#) [L177TWA7W2SMP3SV4RRM6](#) [L177TWA3W3SP2YRM84](#)
[L177TWA3W3SMP2VRM6](#) [L177TWA7W2SHP2SV4FRM6](#) [L177TWA7W2SMP2SV4RRM6](#)
[L177TWB13W3SMP2SV4FRM6](#) [L177TWB13W3SP3SY](#) [L177TWB17W2SCSY](#) [L177TWB17W2SP2SYRM53](#)
[L177TWC13W6SMP2SV4RRM6](#) [L177TWC17W5SMP2SV4RRM6](#) [L177TWC21WA4SMCSV4FRM6](#) [L177TWC27W2S](#)
[L177TWC8W8SCYRM84](#) [L177TWC8W8SEP3V3FRM6](#) [L177TWC8W8SMP3V4FRM6](#) [L177TWD24W7SSY](#)
[L177TWE5W1S](#) [L177TWA11W1PMP3SV4FRM6](#) [L177TWC8W8PP3YRM54](#) [L177TWA7W2PSYRM54](#)
[L177TWC27W2PMP2SV3RRM6](#) [L177TWB5W5PP2YRM84](#) [L177TWB9W4PMCSV4FRM6](#)
[L177TWC27W2PMP3SV4FRM6](#) [L177TWB17W2PHCSVRM6](#) [L177TWC17W5PP3SY](#) [L177TWB5W5PEP2V3RRM6](#)
[L177TWC27W2PP3SY](#) [L177TWC21WA4PP2SYRM84](#) [L177TWC8W8PP2Y](#) [L177TWB13W3PMCSV4FRM6](#)
[L177TWB13W3PSYRM54](#) [L177TWB9W4PMP2SV4RRM6](#) [L177TWB13W3PHCSVRM6](#) [L177TWB17W2PSYRM84](#)
[L177TWC21WA4PMP3SV4FRM6](#) [L177TWC21WA4PP3SYRM84](#) [L177TWB9W4PCSYRM84](#)
[L177TWC21WA4PP2SYRM54](#) [L177TWA7W2PEP2SV4RRM6](#) [L177TWC21WA4PP3SYRM54](#)
[L177TWD36W4PMP3SV4FRM6](#) [L177TWA7W2PMP3SV4FRM6](#) [L177TWB17W2PMP3SV4FRM6](#)
[L177TWB9W4PMP2SVRM6](#) [L177TWA3W3PP2YRM54](#) [L177TWC27W2PMCSV4RRM6](#)
[L177TWB9W4PMP3SV4FRM6](#) [L177TWC8W8PP2YRM54](#) [L177TWA7W2PMP2SVRM6](#) [L177TWB13W3PP3SYRM54](#)
[L177TWC17W5PSY](#) [L177TWA7W2PMP2SV4FRM6](#) [L177TWB13W3PP2SY](#) [L177TWB5W5PMP2V4FRM6](#)
[L177TWA7W2PHP2SV4FRM6](#) [L177TWA7W2PP2SYRM53](#) [L177TWB5W5PMP2V4RRM6](#) [L177TWB5W5PP3YRM54](#)
[L177TWA11W1PP3SYRM54](#) [L177TWB17W2PEP2SV4RRM6](#) [L177TWC8W8PMCV4FRM6](#)
[L177TWA7W2PMP2SV4RRM6](#) [L177TWB17W2PEP3SV4RRM6](#) [L177TWA3W3PMP2V3RRM6](#)
[L177TWA7W2PMP3SV4RRM6](#) [L177TWB13W3PP2SYRM84](#) [L177TWC13W6PP2SY](#) [L177TWC25W3PP3SY](#)
[L177TWC8W8PMCV4RRM6](#) [L177TWD24W7PMP3SV4RRM6](#) [L177TWB13W3PHCSV4FRM6](#) [L177TWC13W6PP3SY](#)
[L177TWA7W2PP3SY](#) [L177TWA3W3PEP3V3RRM6](#) [L177TWB13W3PMP2SV4FRM6](#)
[L177TWB13W3PMP3SV4RRM6](#) [L177TWB5W5PP3YRM53](#) [L177TWC27W2PP3SYRM84](#) [L177TWA7W2PP2SYRM84](#)
[L177TWC25W3PMSVRM6](#) [L177TWC8W8PEP2V4RRM6](#) [L177TWC27W2PHCSV4RRM6](#)
[L177TWD24W7PMP3SVRM6](#) [L177TWB17W2PCSYRM54](#)