

Technical drawing of a rectangular component with dimensions and tolerances:



- Overall width:  $35.2 \pm 0.05$
- Overall height:  $8.1 \pm 0.1$
- Distance from left edge to center of left hole:  $1.5 \pm 0.05$
- Distance from right edge to center of right hole:  $2 \pm 0.05$
- Distance between hole centers:  $31.2 \pm 0.05$
- Distance from left edge to center of left hole:  $0.8 \pm 0.05$
- Distance from right edge to center of right hole:  $1.45 \pm 0.05$
- Distance from left edge to center of left hole:  $0.5 \pm 0.03$
- Distance from right edge to center of right hole:  $0.5 \pm 0.03$
- Left hole diameter:  $\varnothing 1 \pm 0.05$
- Right hole diameter:  $\varnothing 1.3 \pm 0.05$
- POSITION OF POLARIZATION MARK

|                                                                                                                       |          |                |            |                |                   |                                                                                                                                                                             |
|-----------------------------------------------------------------------------------------------------------------------|----------|----------------|------------|----------------|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  HIROSE<br>ELECTRIC<br>CO., LTD. | APPROVED | : HS. OKAWA    | 07. 11. 16 | DRAWING<br>NO. | EDC3-084983-23    |                                                                                                                                                                             |
|                                                                                                                       | CHECKED  | : HS. OZAWA    | 07. 11. 16 | PART<br>NO.    | FX6-80S-0.8SV(93) |                                                                                                                                                                             |
|                                                                                                                       | DESIGNED | : SY. KAMIGA   | 07. 11. 16 | CODE<br>NO.    | CL576-0107-4-93   |   |
|                                                                                                                       | DRAWN    | : HK. SUNADORI | 07. 11. 15 |                |                   |                                                                                                                                                                             |


Aug.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

DRAWING FOR PACKING(2:1)



UNREELING DIRECTION

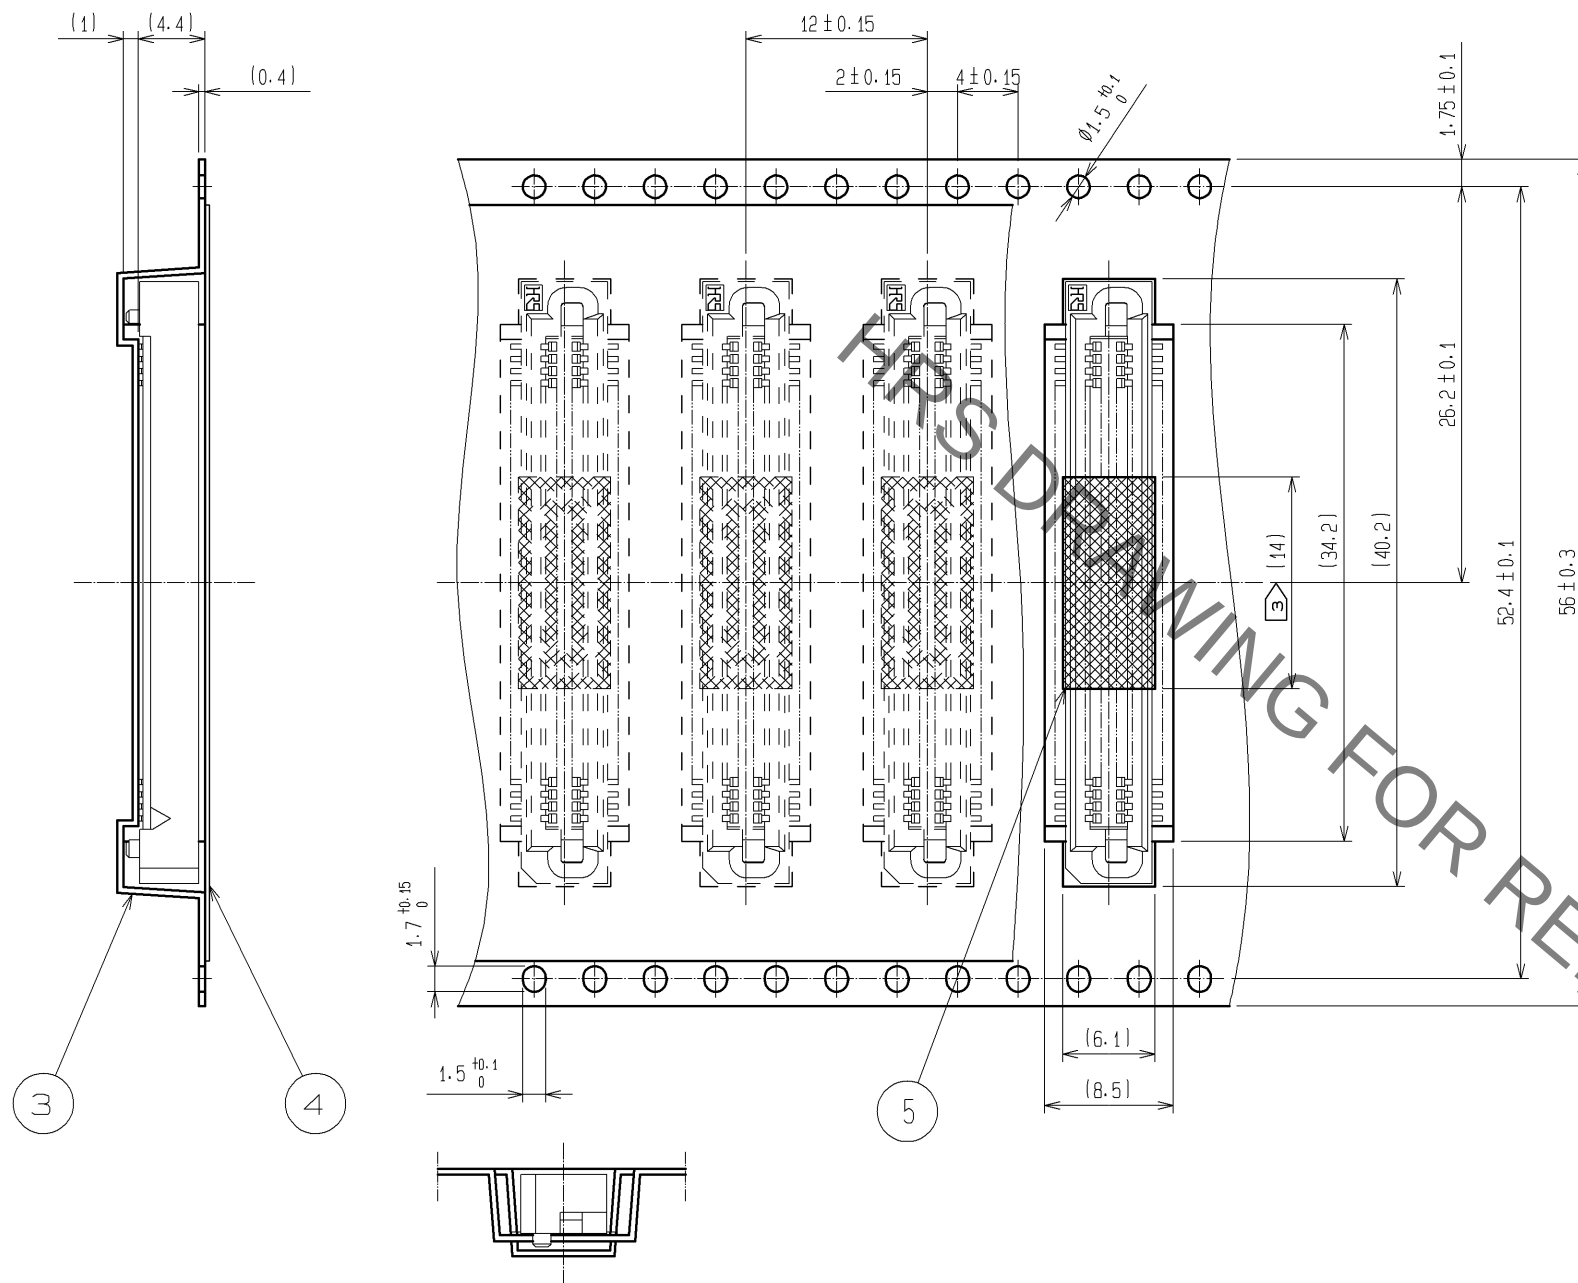

REEL DIMENSION (FREE)

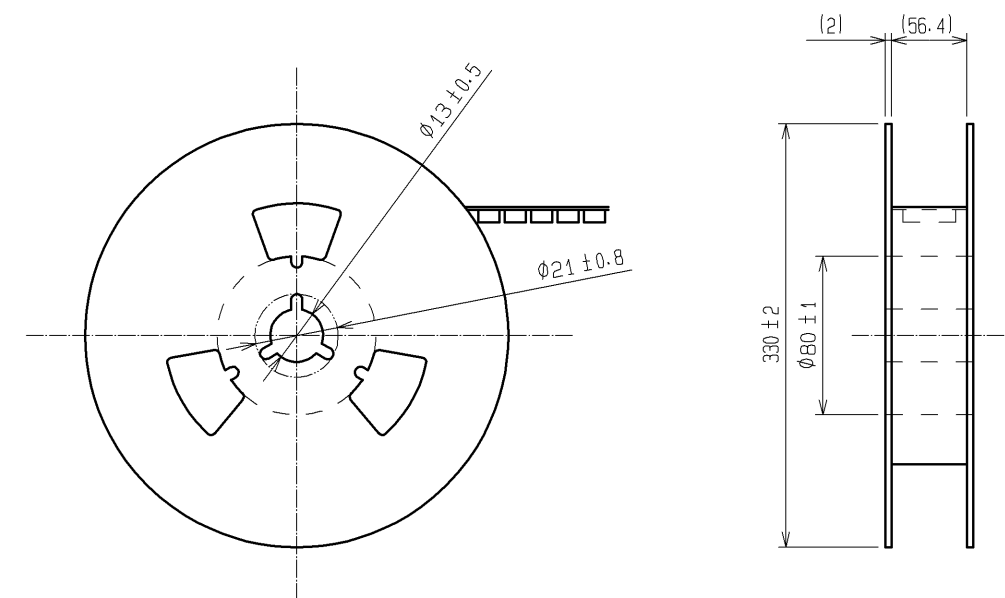

DETAIL OF TAPE FOR VACUUM PICKUP (5:1)

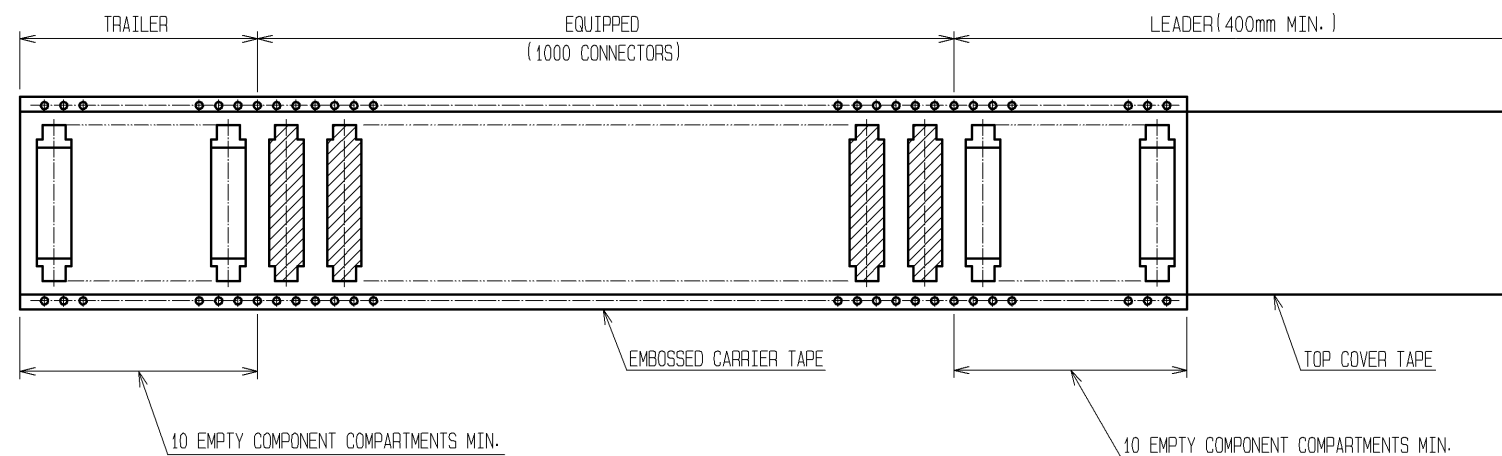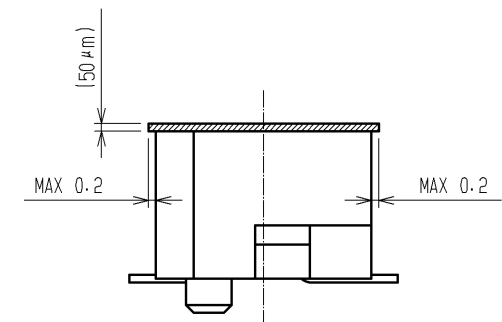

- NOTE 1 1 REEL : 1000 CONNECTORS.  
2 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.  
3 REMOVE THE VACUUM PICKUP TAPE AFTER MOUNTING THE CONNECTOR.

HRS

|             |                   |
|-------------|-------------------|
| DRAWING NO. | EDC3-084983-23    |
| PART NO.    | FX6-80S-0.8SV(93) |
| CODE NO.    | CL576-0107-4-93   |

2/2

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hirose Electric:](#)

[FX6-80S-0.8SV\(93\)](#)