


# 0.4 mm Pitch, 0.9 mm Height, Board-to-Board / Board-to-FPC Connectors

## DF30 Series

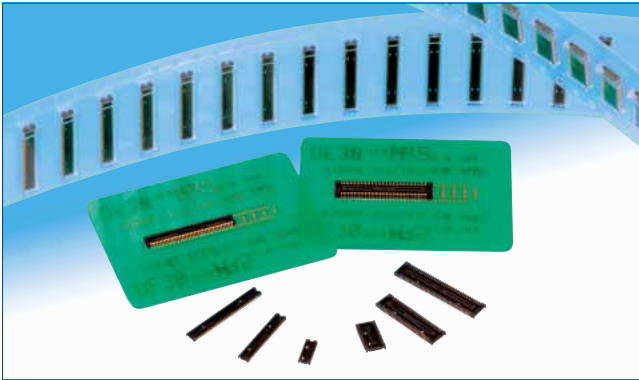

### Space-saving design

Connector footprint is minimized.  
<40 contacts, mated>

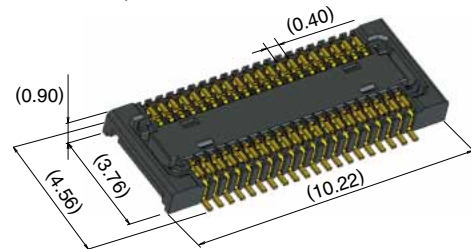


Fig.1

## ■ Features

### 1. High-density mounting

This connector offers a space-saving design that reduces the connector footprint.

The low stacking height of 0.9 mm is highly suited for applications that require a low mounted height. (Fig.1)

### 2. High contact reliability

Projections on the header terminals increase the wiping ability and provide superior mating reliability. During mating, the projections of the header terminals produce a tactile click, which helps to confirm proper insertion. (Fig.2)

### 3. Self-alignment feature

A self-alignment range of 0.3 mm is provided on the receptacle and allows for easier mating in tight spaces. (Fig.3)

### 4. Wide selection of pin counts

Standard pin counts are 20, 22, 24, 30, 34, 40, 50, 60, 70, and 80 positions. Smaller pin counts are also available that are applicable to LCD and camera modules in cell phones.

### 5. Suitable for automatic mounting

Although this connector is extremely small, it still has a sufficient vacuum area for pick-and-place machines to hold the part.

Receptacle area: 1.12 mm

Header area: 1.11 mm

### 6. Test connectors

Highly durable test connectors are available which allow mounted production parts to be tested for electrical performance. Test connectors feature a higher number of insertions and removals cycles. These test connectors are for test purposes only and cannot be used for production requirements. For details, please contact your Hirose sales representative.

### High contact reliability

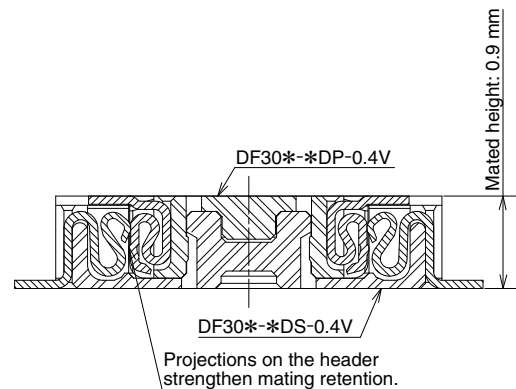


Fig.2

### Wide self-alignment range: 0.3 mm

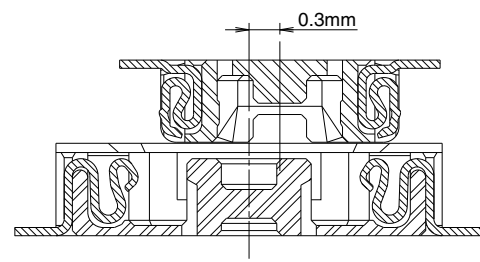


Fig.3

## Product Specifications

| Rating                                    | Rated current 0.3A<br>Rated voltage 30V AC                           | Operating temperature range : -35℃ to 85℃ (Note 1)<br>Operating humidity range : Relative humidity 20% to 80% | Storage temperature range -10℃ to 60℃ (Note 2)<br>Storage humidity range Relative humidity 40% to 70% (Note 2) |
|-------------------------------------------|----------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|
| Item                                      | Specification                                                        | Conditions                                                                                                    |                                                                                                                |
| 1. Insulation resistance                  | 50MΩ min.                                                            | 100V DC                                                                                                       |                                                                                                                |
| 2. Withstanding voltage                   | No flashover or insulation breakdown.                                | 100V AC / 1 minute                                                                                            |                                                                                                                |
| 3. Contact resistance                     | 100mΩ max.                                                           | 100 mA                                                                                                        |                                                                                                                |
| 4. Vibration                              | No electrical discontinuity of 1μs or more                           | Frequency : 10 to 55 Hz, single amplitude of 0.75mm, 2 hours, 3 axis                                          |                                                                                                                |
| 5. Humidity                               | Contact resistance : 100mΩ max.<br>Insulation resistance : 25MΩ min. | 96 hours at temperature of 40℃±2℃ and RH of 90% to 95%                                                        |                                                                                                                |
| 6. Temperature cycle                      | Contact resistance : 100mΩ max.<br>Insulation resistance : 50MΩ min. | Temperature : -55℃→+5℃ to +35℃→+85℃→+5℃ to +35℃<br>Duration : 30→10→30→10(Minutes)<br>5 cycles                |                                                                                                                |
| 7. Durability<br>(insertions/withdrawals) | Contact resistance : 100 mΩ max.                                     | 50 cycles<br>(Connector for conductivity tests : 500 cycles)                                                  |                                                                                                                |
| 8. Resistance to soldering heat           | No deformation of components affecting performance.                  | Reflow : At the recommended temperature profile<br>Manual soldering: 350℃ for 3 seconds                       |                                                                                                                |

Note 1 : Includes temperature rise caused by current flow.

Note 2 : The term "storage" refers to products stored for long period of time prior to mounting and use. Operating temperature range and humidity range covers non-conducting condition of installed connectors in storage, shipment or during transportation.

## Materials

| Connectors              | Component | Material        | Finish        | Remarks |
|-------------------------|-----------|-----------------|---------------|---------|
| Receptacles and Headers | Insulator | LCP             | Color : Black | UL94V-0 |
|                         | Contacts  | Phosphor bronze | Gold plated   | ———     |



## Product Number Structure

### ● Receptacles and Headers

**DF30**   **FC**   **\***   **DS - 0.4**   **V**   **(\*\*)**

|                                                                                                            |                                                                                                                   |
|------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| ① Series name: DF30                                                                                        | ⑤ Contact pitch : 0.4mm                                                                                           |
| ② Configuration<br>FC/RC : Without metal fittings, without bosses<br>CJ : Connector for conductivity tests | ⑥ Termination section<br>V : Straight SMT                                                                         |
| ③ Number of contacts : 20, 22, 24, 30, 34, 40, 50, 60, 70, 80                                              | ⑦ Packaging<br>(81) : Embossed tape packaging (5,000 pcs/reel)<br>(82) : Embossed tape packaging (1,000 pcs/reel) |
| ④ Connector type<br>DS : Double row receptacle<br>DP : Double row header                                   |                                                                                                                   |

## Receptacles

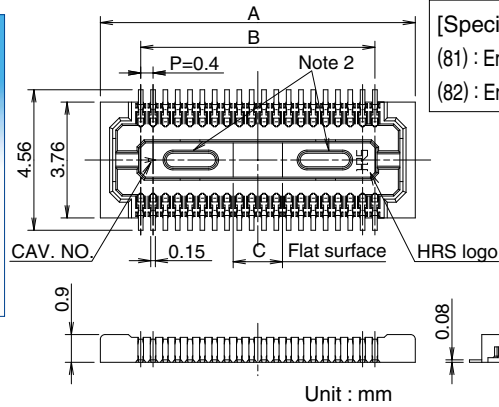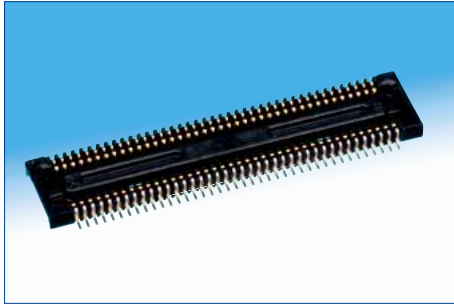

[Specification number] -\*\*, (\*\*)

(81) : Embossed tape packaging (5,000 pcs/reel)

(82) : Embossed tape packaging (1,000 pcs/reel)


Unit : mm

| Part No.             | HRS No.       | No. of contacts | A     | B    | C    | RoHS |
|----------------------|---------------|-----------------|-------|------|------|------|
| DF30FC-20DS-0.4V(**) | 684-1109-8 ** | 20              | 6.22  | 3.6  | 1.2  | Yes  |
| DF30FC-22DS-0.4V(**) | 684-1110-7 ** | 22              | 6.62  | 4.0  |      |      |
| DF30FC-24DS-0.4V(**) | 684-1111-0 ** | 24              | 7.02  | 4.4  |      |      |
| DF30FC-30DS-0.4V(**) | 684-1112-2 ** | 30              | 8.22  | 5.6  |      |      |
| DF30FC-34DS-0.4V(**) | 684-1113-5 ** | 34              | 9.02  | 6.4  | 1.36 |      |
| DF30FC-40DS-0.4V(**) | 684-1078-6 ** | 40              | 10.22 | 7.6  | 1.6  |      |
| DF30FC-50DS-0.4V(**) | 684-1114-8 ** | 50              | 12.22 | 9.6  | 2.0  |      |
| DF30FC-60DS-0.4V(**) | 684-1082-3 ** | 60              | 14.22 | 11.6 | 2.4  |      |
| DF30FC-70DS-0.4V(**) | 684-1115-0 ** | 70              | 16.22 | 13.6 | 2.8  |      |
| DF30FC-80DS-0.4V(**) | 684-1116-3 ** | 80              | 18.22 | 15.6 | 3.2  |      |


Note 1 : Order by number of reels.

Note 2 : Receptacles with 24 or fewer contacts positions will not have recessed areas.

### Recommended PCB mounting pattern

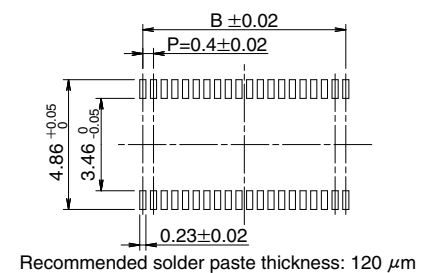

## Header

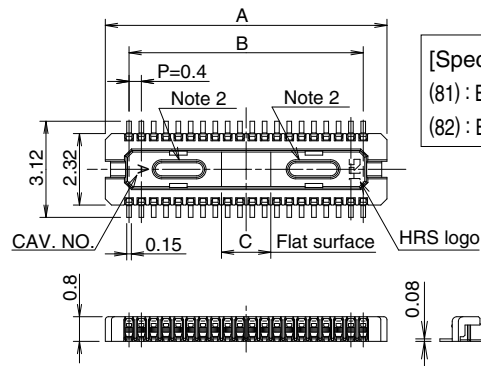

[Specification number] -\*\*, (\*\*)

(81) : Embossed tape packaging (5,000 pcs/reel)

(82) : Embossed tape packaging (1,000 pcs/reel)


Unit : mm

| Part No.             | HRS No.       | No. of contacts | A     | B    | C    | RoHS |
|----------------------|---------------|-----------------|-------|------|------|------|
| DF30RC-20DP-0.4V(**) | 684-1268-1 ** | 20              | 5.14  | 3.6  | 1.2  | Yes  |
| DF30RC-22DP-0.4V(**) | 684-1269-4 ** | 22              | 5.54  | 4.0  |      |      |
| DF30RC-24DP-0.4V(**) | 684-1270-3 ** | 24              | 5.94  | 4.4  |      |      |
| DF30RC-30DP-0.4V(**) | 684-1271-6 ** | 30              | 7.14  | 5.6  |      |      |
| DF30RC-34DP-0.4V(**) | 684-1272-9 ** | 34              | 7.94  | 6.4  | 1.36 |      |
| DF30RC-40DP-0.4V(**) | 684-1273-1 ** | 40              | 9.14  | 7.6  | 1.6  |      |
| DF30RC-50DP-0.4V(**) | 684-1275-7 ** | 50              | 11.14 | 9.6  | 2.0  |      |
| DF30RC-60DP-0.4V(**) | 684-1276-0 ** | 60              | 13.14 | 11.6 | 2.4  |      |
| DF30FC-70DP-0.4V(**) | 684-1077-3 ** | 70              | 15.14 | 13.6 | 2.8  |      |
| DF30FC-80DP-0.4V(**) | 684-1144-9 ** | 80              | 17.14 | 15.6 | 3.2  |      |

Note 1 : Order by number of reels.

Note 2 : Receptacles with 24 or fewer contacts positions will not have recessed areas.


### Recommended PCB mounting pattern

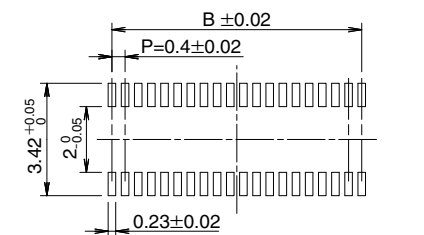


Recommended solder paste thickness: 120 μm

◆ Packaging Specification

● Embossed Carrier Tape Dimensions - Receptacle

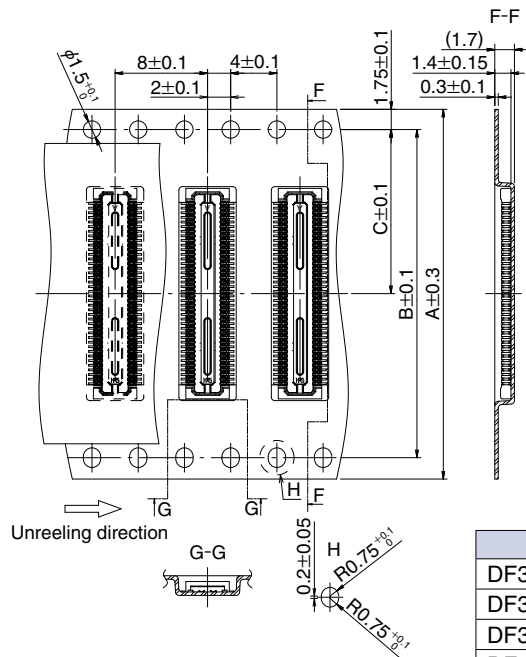

● Reel Dimensions

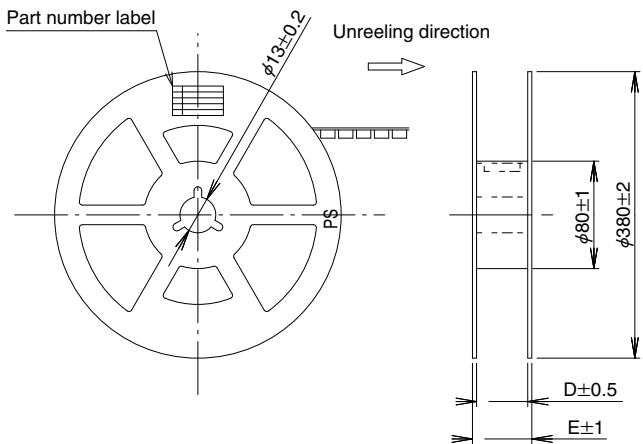


Unit : mm


| Part No.            | A    | B    | C    | D    | E    |
|---------------------|------|------|------|------|------|
| DF30#-20DS-0.4V(**) | 16.0 | —    | 7.5  | 17.5 | 21.5 |
| DF30#-22DS-0.4V(**) |      |      |      |      |      |
| DF30#-24DS-0.4V(**) |      |      |      |      |      |
| DF30#-30DS-0.4V(**) |      |      |      |      |      |
| DF30#-34DS-0.4V(**) | 24.0 | —    | 11.5 | 25.5 | 29.5 |
| DF30#-40DS-0.4V(**) |      |      |      |      |      |
| DF30#-50DS-0.4V(**) |      |      |      |      |      |
| DF30#-60DS-0.4V(**) |      |      |      |      |      |
| DF30#-70DS-0.4V(**) | 32.0 | 28.4 | 14.2 | 33.5 | 37.5 |
| DF30#-80DS-0.4V(**) |      |      |      |      |      |

Embossed tape 32mm or wider will have perforated feed holes on two sides.

● Embossed Carrier Tape Dimensions - Header

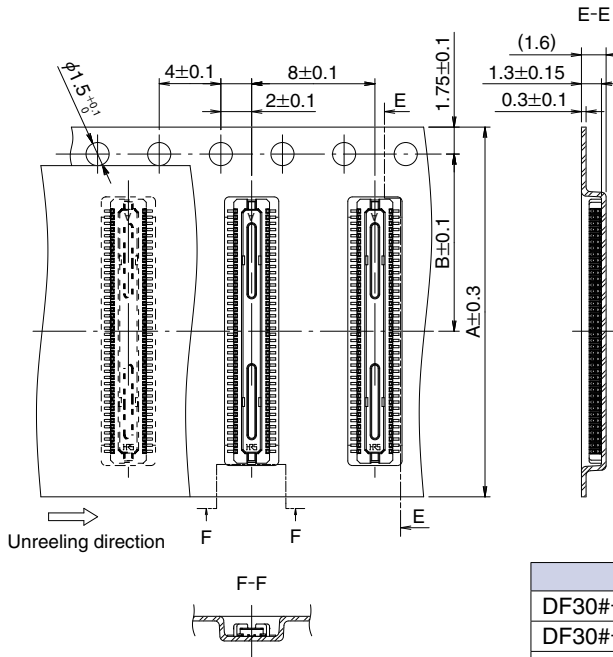



● Reel Dimensions

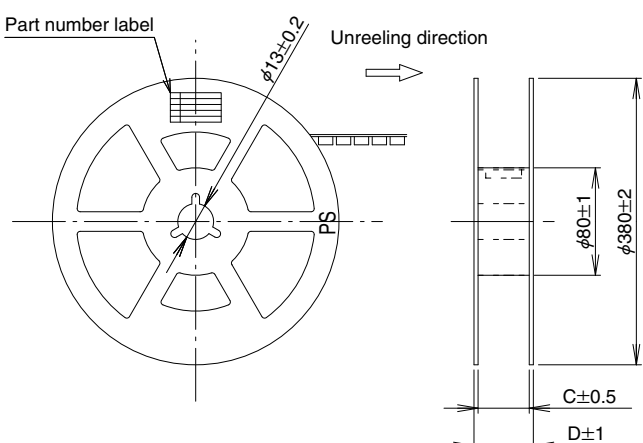





Unit : mm

| Part No.            | A    | B    | C    | D    |
|---------------------|------|------|------|------|
| DF30#-20DP-0.4V(**) | 16.0 | 7.5  | 17.5 | 21.5 |
| DF30#-22DP-0.4V(**) |      |      |      |      |
| DF30#-24DP-0.4V(**) |      |      |      |      |
| DF30#-30DP-0.4V(**) |      |      |      |      |
| DF30#-34DP-0.4V(**) | 24.0 | 11.5 | 25.5 | 29.5 |
| DF30#-40DP-0.4V(**) |      |      |      |      |
| DF30#-50DP-0.4V(**) |      |      |      |      |
| DF30#-60DP-0.4V(**) |      |      |      |      |
| DF30#-70DP-0.4V(**) | 32.0 | 28.4 | 14.2 | 33.5 |
| DF30#-80DP-0.4V(**) |      |      |      |      |





## ◆ Usage Recommendations
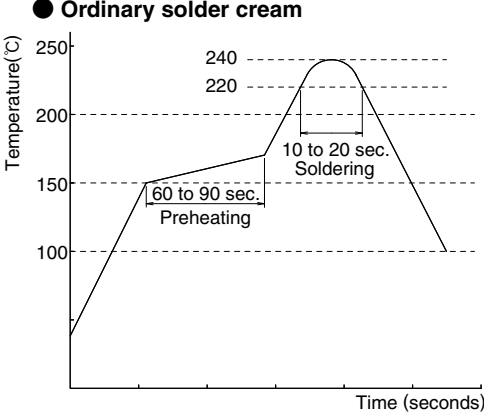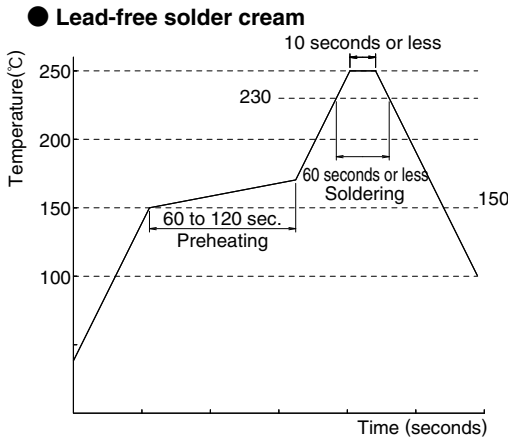
|                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1. Recommended temperature profile                                       | <p>● <b>Ordinary solder cream</b></p>  <p>● <b>Lead-free solder cream</b></p>  <p>Note 1 : Up to 2 cycles of Reflow soldering are possible under the same conditions, provided that there is a return to normal temperature between the first and second cycle.</p> <p>Note 2 : The temperature profile indicates the board surface temperature at the point of contacts with the connector terminals.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 2. Recommended manual soldering                                          | Manual soldering : $340 \pm 10^\circ\text{C}$ for 3 seconds                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 3. Recommended screen thickness and open area ratio (Pattern area ratio) | Thickness : 0.12mm<br>Opening are ratio : DS side 100%, DP side 84%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| 4. Board warpage                                                         | Maximum of 0.02mm at the connector center, with both ends of the connector as reference points.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| 5. Cleaning conditions                                                   | Please refer to the "Handbook on the Use of Wire-to-Board Connectors".                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| 6. Precautions                                                           | <ul style="list-style-type: none"> <li>■ Terminals are exposed on the header side. Please note that touching them with bare hands causes contact failure or static electricity, resulting in damage to the components.</li> <li>■ Note that mating/unmating when the product is not mounted on the PCB could cause damage or deformation of the terminal.</li> <li>■ Avoid supporting the PCB using only the connectors. Other means of support are needed.</li> <li>■ Care should be taken that excessive prying during mating/unmating could cause damage.</li> <li>■ In the case of hand soldering, please do not apply any flux, which could cause flux wicking.</li> <li>■ The product may differ slightly in color due to different production lots of the resin. This color variation has no influence on the performance.</li> <li>■ Please refer to the next page for the precautions for mating/unmating.</li> <li>■ Care should be taken to secure the mated connector and FPC within the device with housings and cushioning materials. This will help prevent disconnections or unmating in the event of dropping, other external forces or stressed routing of the FPC.</li> </ul> |

◆Handling Precautions when mating the connectors
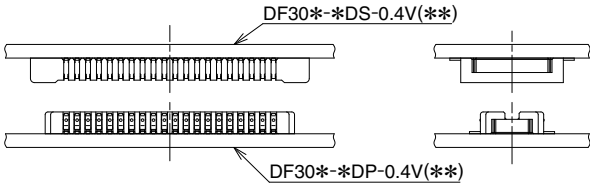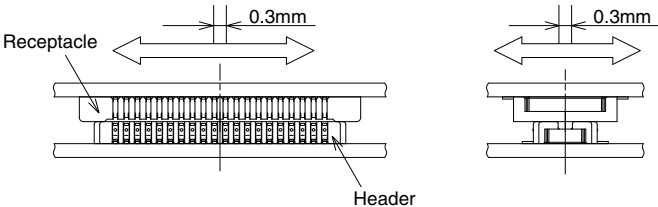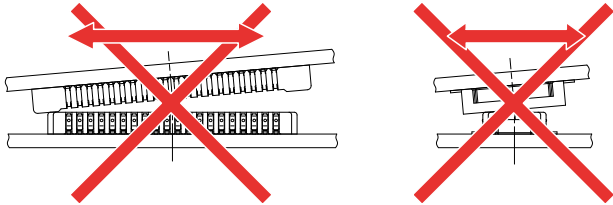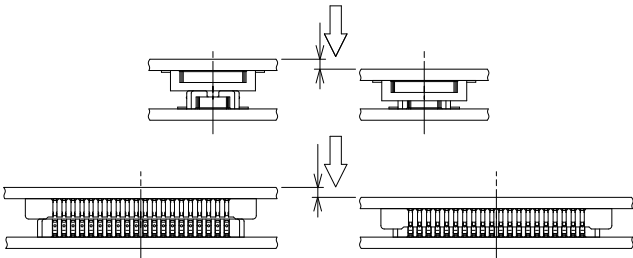
|                                                                                     |                                                                                                                                                                                                                          |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    |                                                                                                                                                                                                                          |
|    | <p>Keep the connectors parallel to each other when positioning.</p>                                                                                                                                                      |
|  | <p>Do not attempt to mate the connectors starting at one end or side.</p>                                                                                                                                                |
|  | <p>Press-down evenly until slight resistance is felt. Overcoming this slight resistance will complete the mating of receptacle with the header. A definite "click" sensation will confirm the fully mated condition.</p> |

◆Handling Precautions when un-mating the connectors
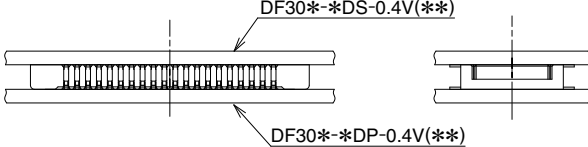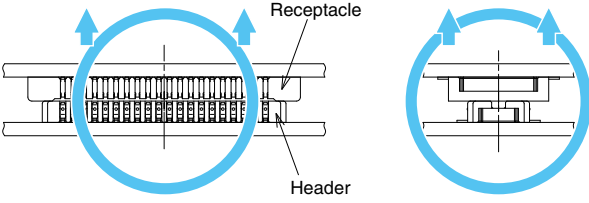
|                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                      | Fully mated                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                                                                                                                                      | Lift even one side, keeping both boards parallel to each other.                                                                                                                                                                                                                                                                                                                                                                                           |
| <div><p>Fig. A</p></div> <div><p>Fig. B</p></div> | <p>When handling circumstances prevent the connector from being kept level during un-mating, one end may be lifted separate as shown on Fig. A. However, to utilize this procedure the connector must be mounted on a sufficiently rigid circuit board. Any deflection of the board during this operation may result in damage to the connector or solder joints. Do not attempt the start of the un-mating of the connectors from one side (Fig. B).</p> |
|                                                                                                                                    | When removal is from the width orientation as illustrated in the diagram to the left, damage could be caused to the connector. Do not perform removal from the width orientation.                                                                                                                                                                                                                                                                         |



**USA:**

**HIROSE ELECTRIC (U.S.A.), INC. HEADQUARTERS CHICAGO OFFICE**  
2300 Warrenville Road, Suite 150,  
Downers Grove, IL 60515  
Phone : +1-630-282-6700  
<http://www.hirose.com/us/>

**USA:**

**HIROSE ELECTRIC (U.S.A.), INC. BOSTON OFFICE**  
300 Brickstone Square Suite 201,  
Andover, MA 01810  
Phone : +1-978-662-5255

**GERMANY:**

**HIROSE ELECTRIC EUROPE B.V. NUREMBERG OFFICE**  
Neumeyerstrasse 22-26, 90411 Nurnberg  
Phone : +49-911 32 68 89 63  
Fax : +49-911 32 68 89 69  
<http://www.hirose.com/eu/>

**UNITED KINGDOM:**

**HIROSE ELECTRIC EUROPE BV (UK BRANCH)**  
4 Newton Court, Kelvin Drive, Knowlhill,  
Milton Keynes, MK5 8NH  
Phone : +44-1908 202050  
Fax : +44-1908 202058  
<http://www.hirose.com/eu/>

**CHINA:**

**HIROSE ELECTRIC (CHINA) CO., LTD. SHENZHEN BRANCH**  
Room 09-13, 19/F, Office Tower Shun Hing Square, Di Wang Commercial Centre,  
5002 Shen Nan Dong Road, Shenzhen City, Guangdong Province, 518008  
Phone : +86-755-8207-0851  
Fax : +86-755-8207-0873  
<http://www.hirose.com/cn/>

**KOREA:**

**HIROSE KOREA CO.,LTD.**  
143, Gongdan 1-daero, Siheung-si,  
Gyeonggi-do, 15084, Korea  
Phone : +82-31-496-7000  
Fax : +82-31-496-7100  
<http://www.hirose.co.kr/>

**INDIA:**

**HIROSE ELECTRIC SINGAPORE PTE. LTD. BANGALORE LIAISON OFFICE**  
Unit No-403, 4th Floor, No-84, Barton Centre, Mahatma  
Gandhi (MG) Road, Bangalore 560 001, Karnataka, India  
Phone : +91-80-4120 1907  
Fax : +91-80-4120 9908  
<http://www.hirose.com/sg/>

**USA:**

**HIROSE ELECTRIC (U.S.A.), INC. SAN JOSE OFFICE**  
2841 Junction Ave, Suite 200  
San Jose, CA. 95134  
Phone : +1-408-253-9640  
Fax : +1-408-253-9641  
<http://www.hirose.com/us/>

**THE NETHERLANDS:**

**HIROSE ELECTRIC EUROPE B.V.**  
Hogehillweg #8 1101 CC Amsterdam Z-O  
Phone : +31-20-6557460  
Fax : +31-20-6557469  
<http://www.hirose.com/eu/>

**GERMANY:**

**HIROSE ELECTRIC EUROPE B.V. HANOVER OFFICE**  
Bayernstr. 3, Haus C 30855 Langenhagen, Germany  
Phone : +49-511 97 82 61 30  
Fax : +49-511 97 82 61 35  
<http://www.hirose.com/eu/>

**CHINA:**

**HIROSE ELECTRIC (CHINA) CO., LTD. (SHANGHAI, HEADQUARTERS)**  
18, Enterprise Center Tower 2, 209# Gong He  
Road, Jing'an District, Shanghai, CHINA 200070  
Phone : +86-21-6391-3355  
Fax : +86-21-6391-3335  
<http://www.hirose.com/cn/>

**HONG KONG:**

**HIROSE ELECTRIC HONGKONG TRADING CO., LTD.**  
Room 1001, West Wing, Tsim Sha Tsui Centre, 66  
Mody Road, Tsim Sha Tsui East, Kowloon, Hong Kong  
Phone : +852-2803-5338  
Fax : +852-2591-6560  
<http://www.hirose.com/hk/>

**SINGAPORE:**

**HIROSE ELECTRIC SINGAPORE PTE. LTD.**  
03, Anson Road, #20-01, Springleaf Tower,  
Singapore 079909  
Phone : +65-6324-6113  
Fax : +65-6324-6123  
<http://www.hirose.com/sg/>

**MALAYSIA:**

**PENANG REPRESENTATIVE OFFICE**  
73-3-1, Ideal@The One, Jalan Mahsuri, Bayan  
Lepas Penang, 11950, Malaysia  
Phone : +604-648-5536  
<http://www.hirose.com/sg/>

**USA:**

**HIROSE ELECTRIC (U.S.A.), INC. DETROIT OFFICE (AUTOMOTIVE)**  
17197 N. Laurel Park Drive, Suite 253,  
Livonia, MI 48152  
Phone : +1-734-542-9963  
Fax : +1-734-542-9964  
<http://www.hirose.com/us/>

**GERMANY:**

**HIROSE ELECTRIC EUROPE B.V. GERMAN BRANCH**  
Schoenbergstr. 20, 73760 ostfildern  
Phone : +49-711-456002-1  
Fax : +49-711-456002-299  
<http://www.hirose.com/eu/>

**FRANCE:**

**HIROSE ELECTRIC EUROPE B.V. PARIS OFFICE**  
130 Avenue Joseph Kessel, Bat E, 78960  
Voisins le Bretonneux, France  
Phone : +33-1-85764886  
Fax : +33-1-85764823  
<http://www.hirose.com/eu/>

**CHINA:**

**HIROSE ELECTRIC (CHINA) CO.,LTD. BEIJING BRANCH**  
A1001, Ocean International Center, Building 56# East 4th  
Ring Middle Road, ChaoYang District, Beijing, 100025  
Phone : +86-10-5165-9332  
Fax : +86-10-5908-1381  
<http://www.hirose.com/cn/>

**TAIWAN:**

**HIROSE ELECTRIC TAIWAN CO., LTD.**  
103 8F, No.87, Zhengzhou Rd., Taipei  
Phone : +886-2-2555-7377  
Fax : +886-2-2555-7355  
<http://www.hirose.com/tw/>

**INDIA:**

**HIROSE ELECTRIC SINGAPORE PTE. LTD. DELHI LIAISON OFFICE**  
Office NO.552, Regus-Green Boulevard, Level5, Tower C,  
Sec62, Plot B-9A, Block B, Noida, 201301, Uttar Pradesh, India  
Phone : +91-12-660-8018  
Fax : +91-120-4804949  
<http://www.hirose.com/sg/>

**THAILAND:**

**BANGKOK OFFICE (REPRESENTATIVE OFFICE)**  
Unit 4703, 47th FL., 1 Empire Tower, South Sathorn  
Road, Yannawa, Sathorn, Bangkok 10120 Thailand  
Phone : +66-2-686-1255  
Fax : +66-2-686-3433  
<http://www.hirose.com/sg/>

**HIROSE ELECTRIC CO.,LTD.**

2-6-3, Nakagawa Chuoh, Tsuzuki-Ku, Yokohama-Shi 224-8540, JAPAN  
TEL: +81-45-620-3526 Fax: +81-45-591-3726  
<http://www.hirose.com>  
<http://www.hirose-connectors.com>



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Hirose Electric:

[DF30FC-60DP-0.4V\(82\)](#) [DF30FB-30DS-0.4V\(82\)](#) [DF30RB-20DP-0.4V\(82\)](#) [DF30FC-40DP-0.4V\(82\)](#) [DF30FC-50DP-0.4V\(82\)](#) [DF30FC-34DS-0.4V\(82\)](#) [DF30FC-50DS-0.4V\(82\)](#) [DF30FB-20DS-0.4V\(82\)](#) [DF30FB-24DS-0.4V\(82\)](#) [DF30FB-40DS-0.4V\(82\)](#) [DF30FC-60DS-0.4V\(82\)](#) [DF30FC-34DP-0.4V\(82\)](#) [DF30FC-24DS-0.4V\(82\)](#) [DF30CJ-30DS-0.4V\(82\)](#) [DF30FB-20DP-0.4V\(82\)](#) [DF30FB-20DS-0.4V\(81\)](#) [DF30FB-30DP-0.4V\(81\)](#) [DF30FB-30DP-0.4V\(82\)](#) [DF30FB-30DS-0.4V\(81\)](#) [DF30FB-34DP-0.4V\(82\)](#) [DF30FB-44DS-0.4V\(82\)](#) [DF30FC-24DP-0.4V\(81\)](#) [DF30FC-24DS-0.4V\(81\)](#) [DF30FC-30DP-0.4V\(81\)](#) [DF30FC-34DS-0.4V\(81\)](#) [DF30FC-40DS-0.4V\(81\)](#) [DF30RB-20DP-0.4V\(81\)](#) [DF30RB-22DP-0.4V\(82\)](#) [DF30RB-24DP-0.4V\(82\)](#) [DF30RB-30DP-0.4V\(81\)](#) [DF30RB-30DP-0.4V\(82\)](#) [DF30RB-34DP-0.4V\(82\)](#) [DF30RB-40DP-0.4V\(82\)](#) [DF30RB-44DP-0.4V\(82\)](#) [DF30RB-50DP-0.4V\(82\)](#) [DF30RB-60DP-0.4V\(82\)](#) [DF30FC-10DS-0.4V\(82\)](#) [DF30FC-14DS-0.4V\(82\)](#) [DF30RC-10DP-0.4V\(82\)](#) [DF30RC-14DP-0.4V\(82\)](#) [DF30RC-20DP-0.4V\(82\)](#) [DF30RC-22DP-0.4V\(82\)](#) [DF30RC-30DP-0.4V\(82\)](#) [DF30RC-34DP-0.4V\(82\)](#) [DF30RC-40DP-0.4V\(82\)](#) [DF30RC-60DP-0.4V\(82\)](#)