# Honeywell

# XPC/XPCL Series and XPXL Series Compensated/Calibrated and Uncompensated/Uncalibrated Board Mount Pressure Sensors



#### DESCRIPTION

The XPC/XPCL Series and XPXL Series sensors integrate silicon micromachined sensing technology, temperature compensation, and calibration in a complete family of low-cost packages. This series offers a cost-effective solution for design requirements.

These piezoresistive pressure sensors use micromachined silicon chips mounted on ceramic and protected with a plastic cap. Several tube arrangements with nylon housings are available for various pressure applications. On devices of 5 psi and above, the top side of the chip is protected against humidity by a Silgel® coating.

Although the sensors are designed for use with noncorrosive, nonionic pressure media, they accommodate many gases that are used in medical applications.

#### FEATURES

- Low cost, small size
- Temperature compensated
- Zero and span calibrated
- Millivolt output
- Differential, gage and absolute pressure
- Constant voltage excitation
- High impedance low current

#### POTENTIAL APPLICATIONS

- Medical applications
- Applications requiring small size
- Applications requiring vacuum and positive pressure reference or both

## **XPC/XPCL Series and XPXL Series**

#### **Table 1. Electrical Specifications**

Characteristic	XPC/XPCL at 12 Vdc, 25 °C [77 °F]			XPXL at 5 Vdc, 25 °C [77 °F]			11-14
	Min.	Тур.	Max.	Min.	Тур.	Max.	Unit
Excitation voltage	3.0	12.0	16.0	3.0	5.0	12.0	Vdc
Null	-1.0	0	1.0	-50	0	50	mV
Offset temperature shift <sup>1</sup> 0 °C to 25 °C [32 °F to 77 °F] 25 °C to 70 °C [77 °F to 158 °F]	_	-	±1.0	-	±0.5	-	mV
Full scale temperature shift <sup>1</sup> 0 °C to 25 °C [32 °F to 158 °F] 25 °C to 70 °C [77 °F to 158 °F]	_	-	±2	-	-1800 PPM/°C	-	% span
Linearity, hysteresis error <sup>2</sup>	-	0.25	1.0	-	0.25	1.0	% span
Input resistance	5.0	_	_	_	3.0	_	kOhm
Output resistance	-	3.0	-	_	3.0	-	kOhm
Operating temperature	-25 [-13]	-	85 [185]	-25 [-13]	-	85 [185]	°C [°F]
Storage temperature	-40 [-40]	_	125 [257]	-40 [-40]	_	125 [257]	°C [°F]
Common mode pressure	-	_	50	-	_	50	psi

Notes:

1. Shift is relative to 25 °C [77 °F].

2. Measured at 1/2 full scale rated pressure using BFSL.

#### Table 2. Absolute Output

FS Pressure	XPC at Output	Overpressure (psi)		
	Min.	Max.	Max.	Йах.
5 psi	57	60	63	15
15 psi	85	90	95	45
30 psi	85	90	95	90
60 psi	85	90	95	180
100 psi	95	100	105	250


#### Table 3. Gage/Differential<sup>1</sup> Output

FS Pressure	XPC/XPCL at 12 Vdc, 25 °C [77 °F] Output Full Scale Span (mV)			XPXL a Output	Overpressure (psi)		
	Min.	Тур.	Max.	Min.	Тур.	Max.	Max.
4 inH₂O	23	25	27	50	68	86	3
10 inH <sub>2</sub> O	19	20	21	45	78.5	112	3
1 psi	17	18	19	40	75	110	3
5 psi	57	60	63	112	168.5	225	15
15 psi	85	90	95	168	253	338	45
30 psi	85	90	95	168	253	338	90
60 psi	85	90	95	189	263.5	338	180
100 psi	95	100	105	210	295	380	250
150 psi	85	90	95	187	262.5	338	250


Note:

1. Differential common mode pressure should not exceed 50 psi.


#### Figure 1. Mounting Dimensions (For reference only: mm (in).)

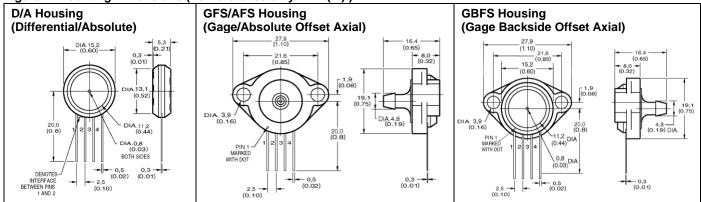


### Compensated/Calibrated and Uncompensated/ Uncalibrated Board Mount Pressure Sensors

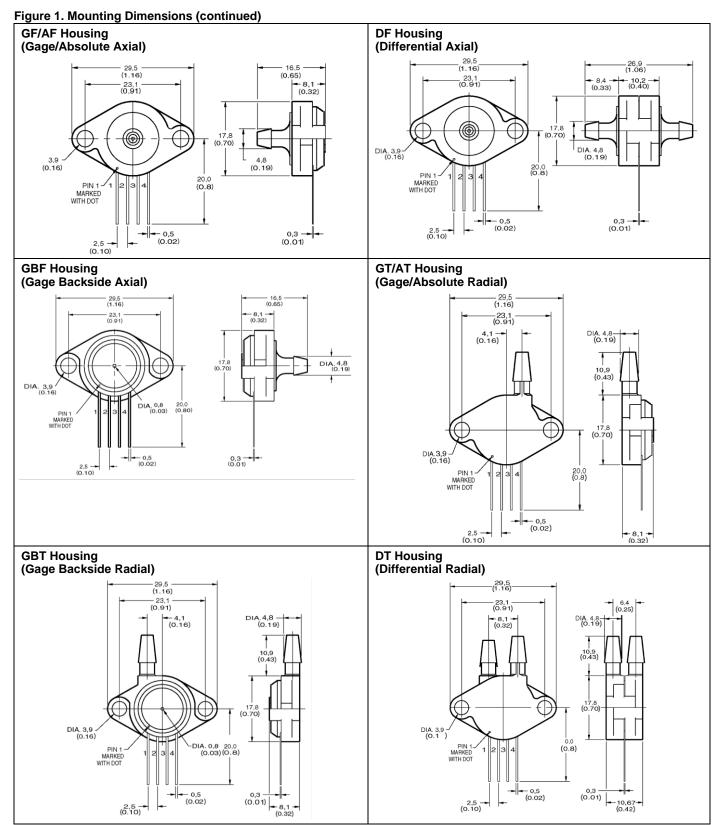

#### Figure 2. Equivalent Circuit



#### Order Guide<sup>1</sup>

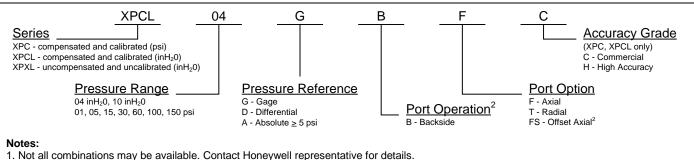

2. Option available in ported gage version only.

### A WARNING

#### PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

#### WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

### 

#### **MISUSE OF DOCUMENTATION**

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

#### SALES AND SERVICE

Honeywell serves its customers through a worldwide network of sales offices, representatives and distributors. For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact your local sales office or:

E-mail: info.sc@honeywell.com

Internet: www.honeywell.com/sensing

#### Phone and Fax:

Asia Pacific +65 6355-2828 +65 6445-3033 Fax Europe +44 (0) 1698 481481 +44 (0) 1698 481676 Fax Latin America +1-305-805-8188 +1-305-883-8257 Fax USA/Canada +1-800-537-6945 +1-815-235-6847 +1-815-235-6545 Fax

Sensing and Control Honeywell 1985 Douglas Drive North Golden Valley, MN 55422 www.honeywell.com/sensing

## Honeywell

008046-6-EN IL50 GLO Printed in USA July 2011 © 2011 Honeywell International Inc. All rights reserved

### **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Honeywell:

XPC05DTC XPC05DTH XPCL04DFC XPCL04DTC XPCL10DTC XPCL10DTH