



Representative photograph, actual product appearance may vary.

Due to regional agency approval requirements, some products may not be available in your area. Please contact your regional Honeywell office regarding your product of choice.

RA30LASB502A

RA30 Series Industrial Potentiometer, Wire Wound Element, Solder lug Terminals, 4 W Power Rating, 5 kOhm Resistance Value

Features

- Robust nickel-plated brass shaft and bushings
- Wirewound element
- Linear taper
- Very stable over the operating temperature
- Locking style bushing
- Meets MIL-R-19 standards

Typical Applications

- Manual controls
- Welding and heating

Description

The RA30 Series is a military qualified potentiometer made in accordance to MIL-R-19 specifications. It offers a 3 watt power rating and a wirewound element.

RA30LASB502A

RA30 Series Industrial Potentiometer, Wire Wound Element, Solder lug Terminals, 4 W Power Rating, 5 kOhm Resistance Value

Product Specifications	
Potentiometer Type	Industrial
Element Type	Wire Wound
Terminal Type	Solder lug
Power Rating	4 W
Resistance Value	5 kOhm
Resistance Tolerance	± 10 %
Linearity	± 5 %
Bushing Thread	9,53 mm [0.375 in] x 32 NEF-2A
Bushing length	12,7 mm [0.5 in]
Bushing Type	Locking
Shaft Diameter	6,35 mm [0.25 in]
Shaft length	15,88 mm [0.625 in]
Shaft Ending	Slotted
Body	42.93 mm [1.69 in] diameter, ± 0.79 mm [0.031 in], except at terminal standoff
Electrical Taper	Linear
Operating Temperature	-55 °C to 105 °C [-67 °F to 220 °F]
Working Voltage (Max.)	350 V
Rotational Life	25000 cycles
Mechanical Rotation	300°
Availability	Global


Series Name	RA30 Series
UNSPSC Code	4111363300
UNSPSC Commodity	4111363300 Potentiometers

Honeywell

RA30LASB502A

RA30 Series Industrial Potentiometer, Wire Wound Element, Solder lug Terminals, 4 W Power Rating, 5 kOhm Resistance Value

For Reference Only in/mm

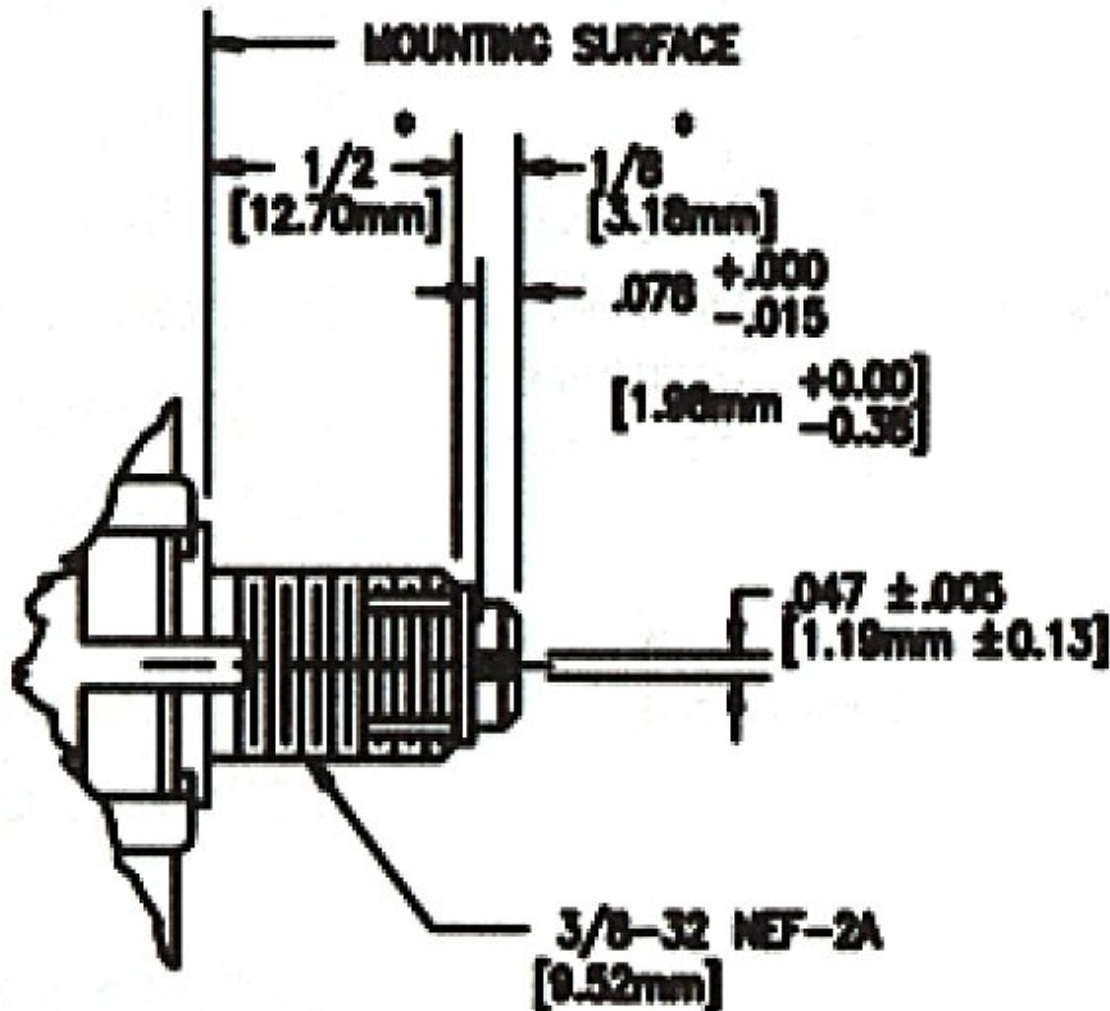

OPTIONAL SPLIT BUSHING
JAM NUT SUPPLIED
UNLESS OTHERWISE SPECIFIED

Honeywell

RA30LASB502A

RA30 Series Industrial Potentiometer, Wire Wound Element, Solder lug Terminals, 4 W Power Rating, 5 kOhm Resistance Value

WARNING

PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices, or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

WARNING

MISUSE OF DOCUMENTATION

- The information presented in this product sheet (or catalog) is for reference only. DO NOT USE this document as product installation information.
- Complete installation, operation and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[RA30LASB502A](#)