

BGS13SN8

Wideband RF SP3T Switch

Data Sheet

Revision 2.2 - 2015-11-11
Final

Power Management & Multimarket

Edition 2015-11-11

**Published by Infineon Technologies AG
81726 Munich, Germany**

**©2015 Infineon Technologies AG
All Rights Reserved.**

LEGAL DISCLAIMER

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office. Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Revision History

Document No.: BGS13SN8_Final_v2.2.pdf

Revision History: Final Rev. v2.2

Previous Version: Final, Revision v2.1 - 2015-03-30

Page	Subjects (major changes since last revision)
1	Status updated
5	Marking updated

Trademarks of Infineon Technologies AG

AURIX™, C166™, CanPAK™, CIPOS™, CIPURSE™, CoolGaN™, CoolMOS™, CoolSET™, CoolSiC™, CORECONTROL™, CROSSAVE™, DAVE™, DI-POL™, DrBLADE™, EasyPIM™, EconoBRIDGE™, EconoDUAL™, EconoPACK™, EconoPIM™, EiceDRIVER™, eupec™, FCOS™, HITFET™, HybridPACK™, ISOFACE™, IsoPACK™, i-Wafer™, MIPAQ™, ModSTACK™, my-d™, NovalithiC™, OmniTune™, OPTIGA™, OptiMOS™, ORIGA™, POWERCODE™, PRIMARION™, PrimePACK™, PrimeSTACK™, PROFET™, PRO-SIL™, RASIC™, REAL3™, ReverSave™, SatRIC™, SIEGET™, SIPMOS™, SmartLEWIS™, SOLID FLASH™, SPOC™, TEMPFET™, thinQ!™, TRENCHSTOP™, TriCore™.

Other Trademarks

Advance Design System™ (ADS) of Agilent Technologies, AMBA™, ARM™, MULTI-ICE™, KEIL™, PRIMECELL™, REALVIEW™, THUMB™, μ Vision™ of ARM Limited, UK. ANSI™ of American National Standards Institute. AUTOSAR™ of AUTOSAR development partnership. Bluetooth™ of Bluetooth SIG Inc. CAT-ig™ of DECT Forum. COLOSSUS™, FirstGPS™ of Trimble Navigation Ltd. EMV™ of EMVCo, LLC (Visa Holdings Inc.). EPCOS™ of Epcos AG. FLEXGO™ of Microsoft Corporation. HYPERTERMINAL™ of Hilgraeve Incorporated. MCS™ of Intel Corp. IEC™ of Commission Electrotechnique Internationale. IrDA™ of Infrared Data Association Corporation. ISO™ of INTERNATIONAL ORGANIZATION FOR STANDARDIZATION. MATLAB™ of MathWorks, Inc. MAXIM™ of Maxim Integrated Products, Inc. MICROTEC™, NUCLEUS™ of Mentor Graphics Corporation. MIPI™ of MIPI Alliance, Inc. MIPS™ of MIPS Technologies, Inc., USA. muRata™ of MURATA MANUFACTURING CO., MICROWAVE OFFICE™ (MWO) of Applied Wave Research Inc., OmniVision™ of OmniVision Technologies, Inc. Openwave™ of Openwave Systems Inc. RED HAT™ of Red Hat, Inc. RFMD™ of RF Micro Devices, Inc. SIRIUS™ of Sirius Satellite Radio Inc. SOLARIS™ of Sun Microsystems, Inc. SPANSION™ of Spansion LLC Ltd. Symbian™ of Symbian Software Limited. TAIYO YUDEN™ of Taiyo Yuden Co. TEAKLITE™ of CEVA, Inc. TEKTRONIX™ of Tektronix Inc. TOKO™ of TOKO KABUSHIKI KAISHA TA. UNIX™ of X/Open Company Limited. VERILOG™, PALLADIUM™ of Cadence Design Systems, Inc. VLYNQ™ of Texas Instruments Incorporated. VXWORKS™, WIND RIVER™ of WIND RIVER SYSTEMS, INC. ZETEX™ of Diodes Zetex.

Last Trademarks Update 2014-07-17

Contents

1	Features	5
2	Product Description	5
3	Maximum Ratings	6
4	Operation Ranges	7
5	RF Characteristics	8
6	GPIO Specification	9
7	Pin Definition and Package Outline	9

List of Figures

1	BGS13SN8 Block Diagram	6
2	Package Outline (bottom and side view)	10
3	Marking Pattern	10
4	Land pattern and stencil mask	11
5	Packing (Tape)	11

List of Tables

1	Ordering Information	5
2	Maximum Ratings, Table I	6
3	Maximum Ratings, Table II	7
4	Operation Ranges	7
5	RF Input Power	7
6	RF Characteristics	8
7	GPIO Truth Table	9
8	Pin Configuration	9
9	Mechanical Data	9

BGS13SN8 Wideband RF SP3T Switch

1 Features

- 3 high-linearity TRx paths with power handling capability of up to 30 dBm
- High switching speed, ideal for WLAN and Bluetooth applications
- Low insertion loss
- Low harmonic generation
- High port-to-port-isolation
- Suitable for Edge / CDMA2000 / LTE / WCDMA applications
- 0.1 to 6 GHz coverage
- No decoupling capacitors required if no DC applied on RF lines
- On-chip control logic including ESD protection
- General Purpose Input-Output (GPIO) Interface
- Small form factor 1.1 mm x 1.1 mm
- No power supply blocking required
- High EMI robustness
- RoHS and WEEE compliant package



2 Product Description

The BGS13SN8 RF MOS switch is specifically designed for WLAN and Bluetooth applications. Any of the 3 ports can be used as termination of the diversity antenna handling up to 30 dBm.

This SP3T offers low insertion loss and high robustness against interferer signals at the antenna port and low harmonic generation in termination mode. The on-chip controller integrates CMOS logic and level shifters, driven by control inputs from 1.35 V to VDD. The BGS13SN8 RF Switch is manufactured in Infineon's patented MOS technology, offering the performance of GaAs with the economy and integration of conventional CMOS including the inherent higher ESD robustness. The device has a very small size of only 1.1 x 1.1 mm² and a maximum height of 0.4 mm.

No decoupling capacitors are required in typical applications as long as no DC is applied to any RF port.

Table 1: Ordering Information

Type	Package	Marking
BGS13SN8	TSNP-8-1	R

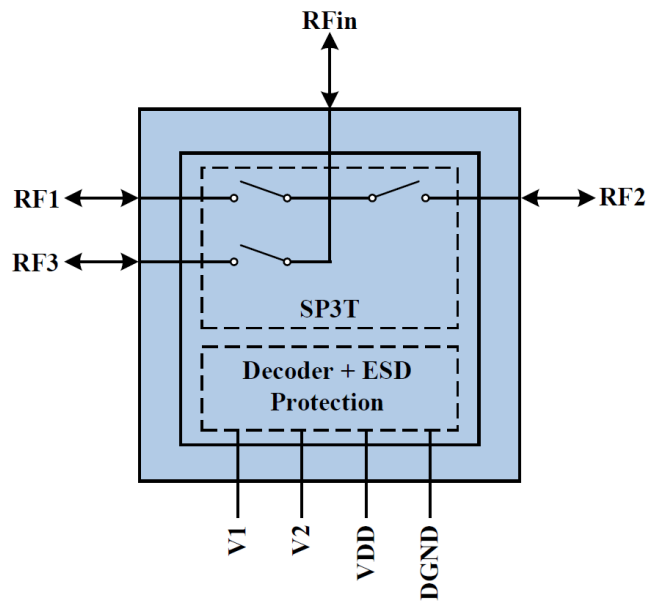


Figure 1: BGS13SN8 Block Diagram

3 Maximum Ratings

Stresses above the maximum values listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. Maximum ratings are absolute ratings; exceeding only one of these values may cause irreversible damage to the integrated circuit.

Table 2: Maximum Ratings, Table I at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Frequency Range	f	0.1	–	6	GHz	¹⁾
Supply voltage	V_{DD}	-0.5	–	3.6	V	–
Storage temperature range	T_{STG}	-55	–	150	$^\circ\text{C}$	–
Junction temperature	T_j	–	–	125	$^\circ\text{C}$	–
RF input power at all Rx ports	P_{RF_Rx}	–	–	32	dBm	CW
ESD capability, CDM ²⁾	V_{ESD_CDM}	-1000	–	+1000	V	All pins
ESD capability, HBM ³⁾	V_{ESD_HBM}	-1000	–	+1000	V	Digital versus RF interface
		-1000	–	+1000	V	RF interface
ESD capability, system level ⁴⁾	V_{ESD_ANT}	-8000	–	+8000	V	ANT versus system GND, with 27 nH shunt inductor

¹⁾There is also a DC connection between switched paths. The DC voltage at RF ports V_{RFDC} has to be 0V.

²⁾Field-Induced Charged-Device Model JESD22-C101. Simulates charging/discharging events that occur in production equipment and processes. Potential for CDM ESD events occurs whenever there is metal-to-metal contact in manufacturing.

³⁾Human Body Model ANSI/ESDA/JEDEC JS-001-2012 ($R=1.5\text{ k}\Omega$, $C=100\text{ pF}$).

⁴⁾IEC 61000-4-2 ($R=330\text{ }\Omega$, $C=150\text{ pF}$), contact discharge.

Table 3: Maximum Ratings, Table II at $T_A = 25\text{ }^{\circ}\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Maximum DC-voltage on RF-Ports and RF-Ground	V_{RFDC}	0	–	0	V	No DC voltages allowed on RF-Ports

4 Operation Ranges

Table 4: Operation Ranges

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Supply voltage	V_{DD}	1.8	–	3.4	V	–
Supply current ¹⁾	I_{BAT}	–	80	–	μA	–
GPIO control voltage high	$V_{\text{Ctrl_H}}$	1.35	–	$V_{\text{BAT}} + 0.3$	V	–
GPIO control voltage low	$V_{\text{Ctrl_L}}$	-0.3	–	0.45	V	–
GPIO control input capacitance	C_{Ctrl}	–	–	2	pF	Guaranteed by design
Ambient temperature	T_A	-40	25	85	$^{\circ}\text{C}$	–

¹⁾ $T_A = -40\text{ }^{\circ}\text{C} - 85\text{ }^{\circ}\text{C}$, $V_{\text{DD}} = 1.8 - 3.4\text{ V}$
Table 5: RF Input Power

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Rx ports (50 Ω)	$P_{\text{RF_Rx}}$	–	–	30	dBm	–

5 RF Characteristics

Table 6: RF Characteristics at $T_A = -40\text{ }^{\circ}\text{C} - 85\text{ }^{\circ}\text{C}$, $P_{IN} = 0\text{ dBm}$, Supply Voltage $V_{DD} = 1.8\text{ V} - 3.4\text{ V}$, unless otherwise specified

Parameter	Symbol	Values			Unit	Note / Test Condition
		Min.	Typ.	Max.		
Insertion Loss (T _A = 25 °C)						
All Rx Ports	IL	0.15	0.22	0.42	dB	698–960 MHz
		0.18	0.25	0.45	dB	1428–1990 MHz
		0.18	0.28	0.63	dB	1920–2170 MHz
		0.20	0.33	0.63	dB	2170–2690 MHz
		0.30	0.65	1.10	dB	5150–5725 MHz
Return Loss						
All Rx Ports	RL	20	30	40	dB	698–960 MHz
		19	23	38	dB	1428–1990 MHz
		17	21	35	dB	1920–2170 MHz
		15	19	32	dB	2170–2690 MHz
		12	14	28	dB	5150–5725 MHz
Isolation						
All Rx Ports	ISO	30	35	48	dB	698–960 MHz
		22	30	38	dB	1428–1990 MHz
		18	27	38	dB	1920–2170 MHz
		18	25	35	dB	2170–2690 MHz
		10	15	30	dB	5150–5725 MHz
P0.1 dB Compression Point, Extrapolated						
All Rx Ports ¹⁾	P _{0.1dB}	34	–	–	dBm	824–960 MHz
Harmonic Generation up to 12.75 GHz						
H2	P _{Harm}	–	-90	-75	dBc	23 dBm, 50 Ω, CW mode
H3	P _{Harm}	–	-95	-80	dBc	23 dBm, 50 Ω, CW mode
Intermodulation Distortion in Rx Band ²⁾ (T _A = 25 °C)						
IMD2, low	IMD2 _{low}	–	–	-105	dBm	Tx = 10 dBm, Interferer = –15 dBm, 50 Ω
IMD3	IMD3	–	–	-115	dBm	
IMD2, high	IMD2 _{high}	–	–	-105	dBm	
Switching Time						
RF Rise Time ³⁾	t _{on/off}	–	90	150	ns	90 % OFF to 90 % ON; 90 % ON to 90 % OFF
Ctrl to RF Time ³⁾	t _{Ctrl-RF}	–	500	1000	ns	50 % of Ctrl Signal to 90 % of RF Signal

¹⁾Guaranteed by design.

²⁾On application board with shunt inductor, Min/Max-values measured with phase shifter.

³⁾Guaranteed by characterization.

6 GPIO Specification

Table 7: Modes of Operation (Truth Table)

State	Mode	Control Inputs	
		V1	V2
1	Isolation	0	0
2	RFin - RF1	1	0
3	RFin - RF2	0	1
4	RFin - RF3	1	1

7 Pin Definition and Package Outline

Table 8: Pin Configuration

No	Name	Pin Type	Buffer Type	Function
1	VDD	PWR		Power Supply
2	V2	I		Control Pin 2
3	V1	I		Control Pin 1
4	RF3	I/O		RF-Port 3
5	RF1	I/O		RF-Port 1
6	RFin	I/O		RF Input
7	RF2	I/O		RF-Port 2
8	DGND	GND		Digital Ground

Table 9: Mechanical Data

Parameter	Symbol	Value	Unit
X-Dimension	X	1.1 ± 0.05	mm
Y-Dimension	Y	1.1 ± 0.05	mm
Size	Size	1.21	mm ²
Height	H	0.375	mm

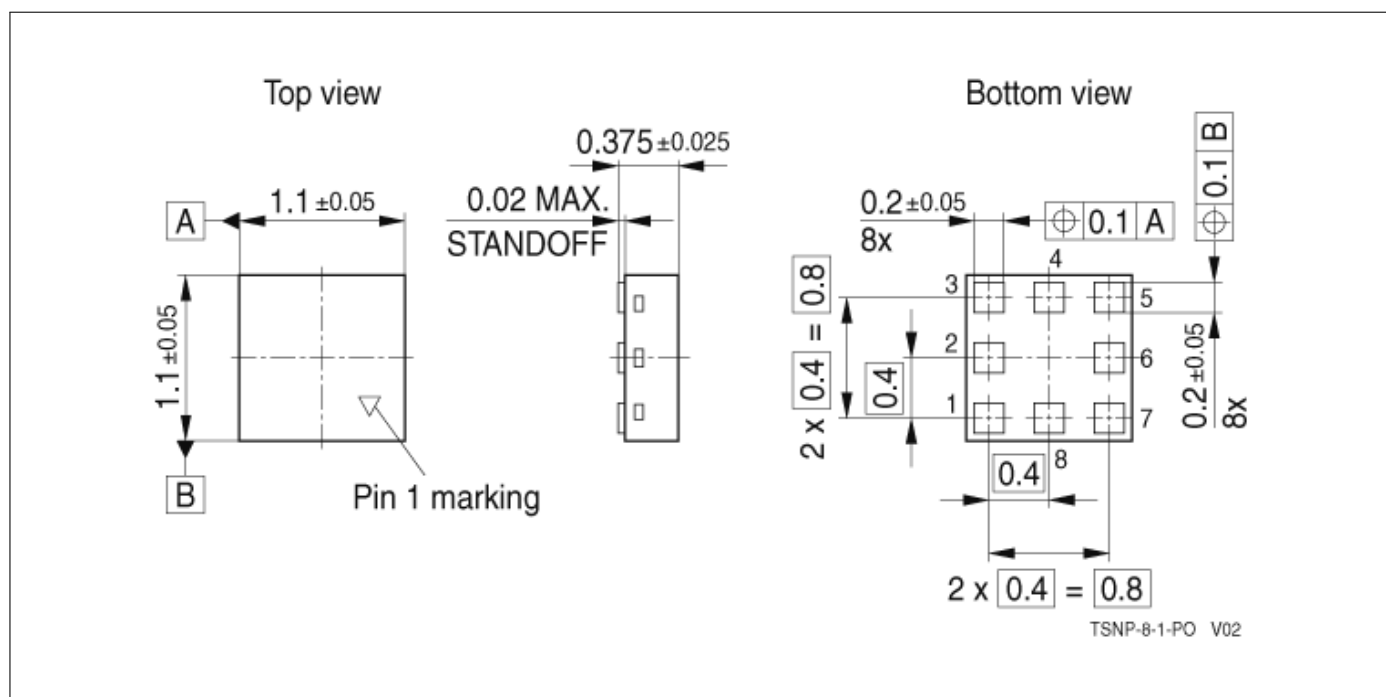


Figure 2: Package Outline (bottom and side view)

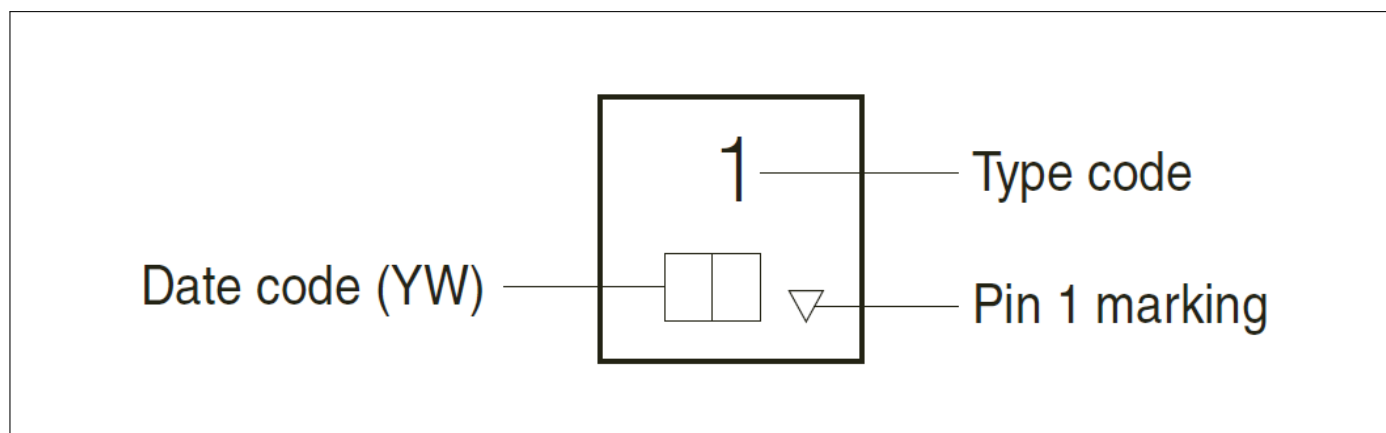


Figure 3: Marking Pattern

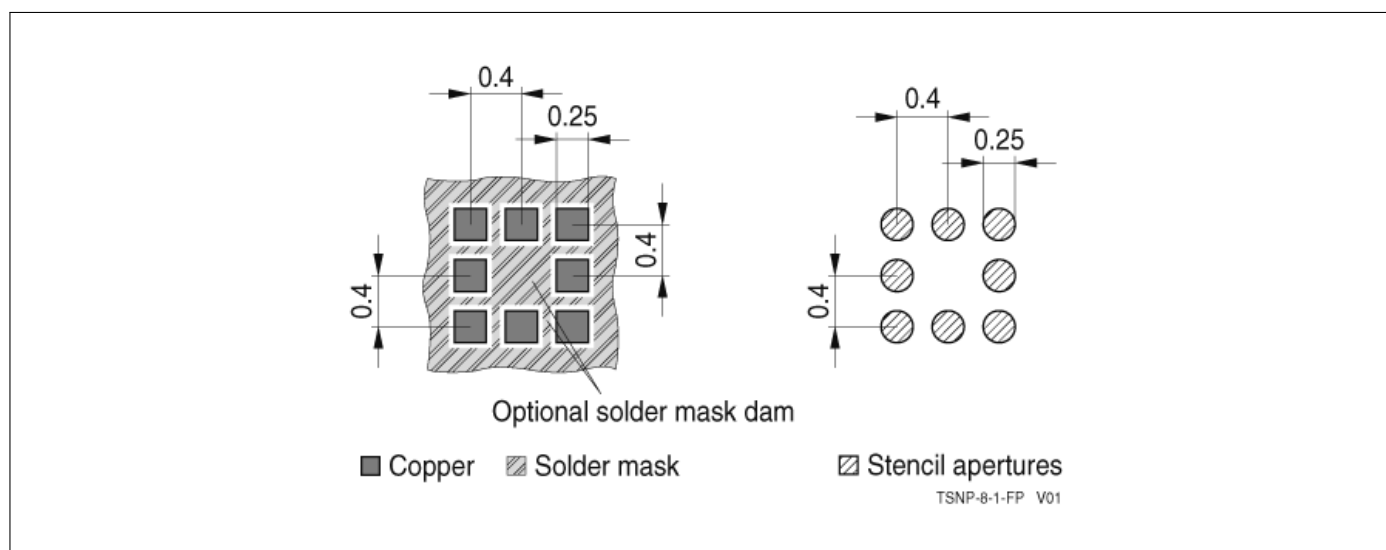


Figure 4: Land pattern and stencil mask

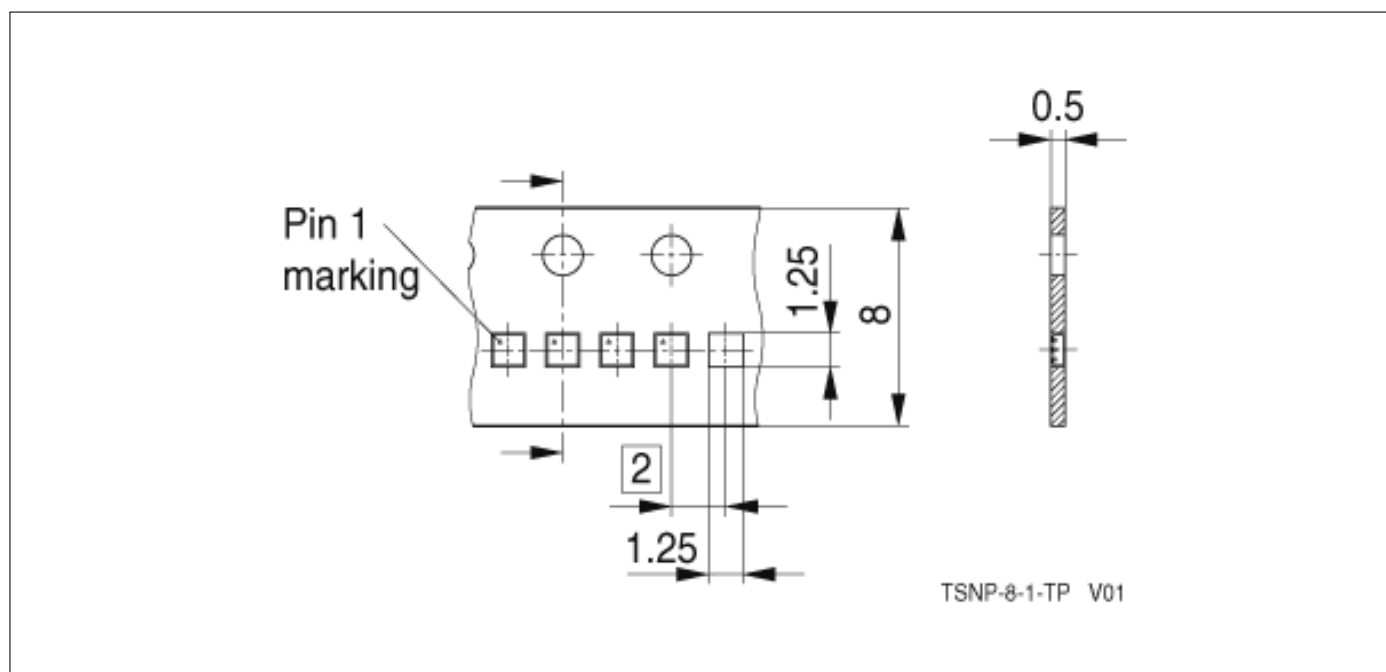


Figure 5: Packing (Tape)

www.infineon.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Infineon:](#)

[BGS13SN8E6327XTSA1](#)