



1. SPECIFICATION

AX-1606-LF


ITEM		UNITS	SPECIFICATIONS	CONDITIONS
01	Rated Voltage	V	6	
02	Operating Voltage	V	3 ~ 9	
03	Consumption Current	mA (Max)	30	Rated Voltage
04	Resonant Frequency	Hz	2200± 300	Rated Voltage
05	Response times	ms	≥ 100	
06	Sound pressure level	dB(A) Min.	85	Distance at 10cm Rated Voltage / Resonant Frequency

REV NO.

REVISION NOTE

APPROVAL

DATE

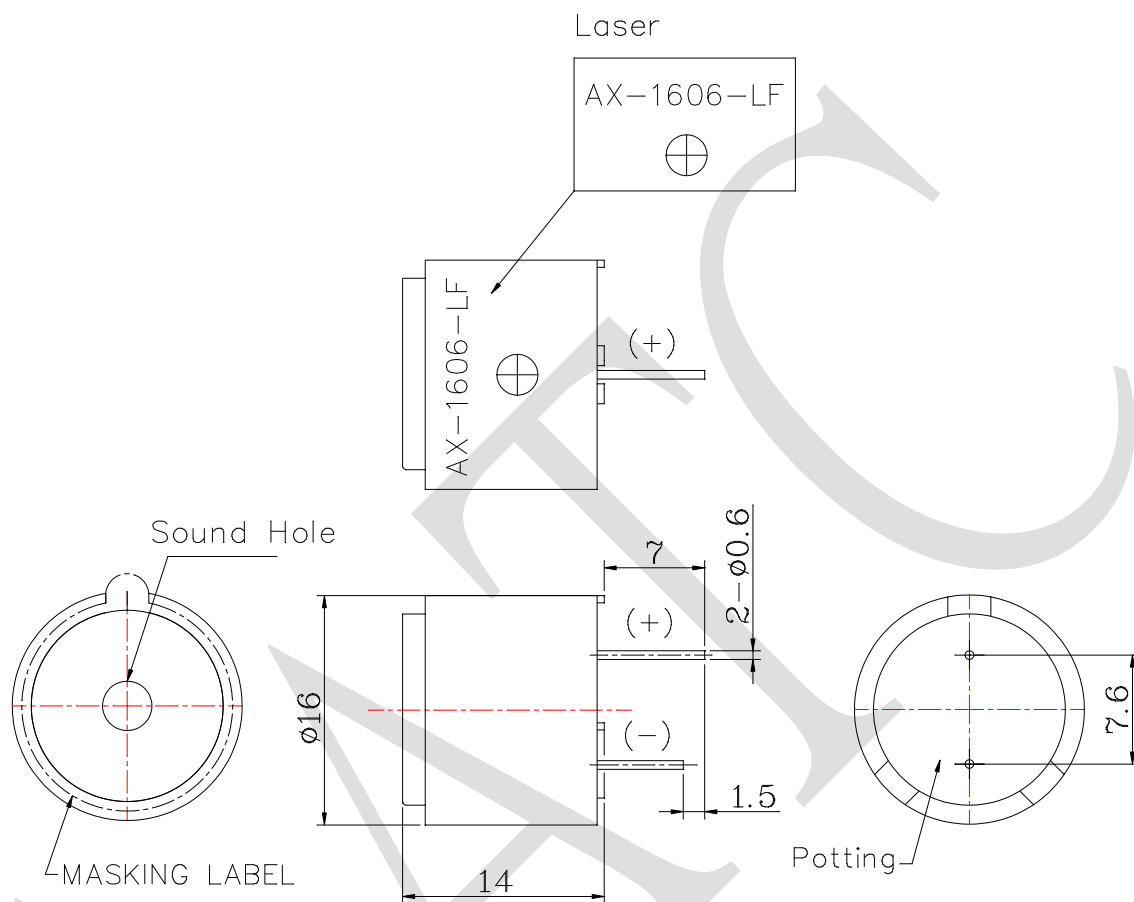

RoHS

TITLE: ELECTRO MAGNETIC BUZZER

DRAWN: SUNNY 2019-3-28

SCALE: 4:1 SHEET: 1 of 1

PART NO. AX-1606-LF

DESIGNED: R&D OF AAT

UNITS: mm

5

CHECKED:

TOLERANCE ± 0.5

DWG NO. UGCM1606XP-2200

APPROVAL:

UNLESS OTHERWISE SPECIFIED:

REV

MATERIAL: NORYL

ONE PLACE DECIMAL ± ***

TWO PLACE DECIMAL ± ***

THREE PLACE DECIMAL ± ***



ADVANCED ACOUSTIC TECHNOLOGY CORPORATION

For more information, please contact AATC.

AATC

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[AATC:](#)

[AX-1606-LF](#)