

IRS2461S

400V Class D Audio Amplifier Controller

Features

- Single channel integrated analog input Class D audio amplifier driver
- 400V high voltage gate driver stage
- Differential or single-ended input
- Versatile protection control enabling latched, non-latched, or host controlled shutdown function
- Programmable over current protection
- Programmable dead-time generation
- External thermal sensor input
- Click noise reduction
- Under voltage protection
- High noise immunity

Product summary

Product feature	Key specification
Topology	Half-Bridge/Full-Bridge
$V_{\text{OFFSET (max)}}$	+/- 200 V
$I_{\text{O+}} \& I_{\text{O-}}$ (typical)	0.5 A & 0.6 A
Selectable deadtime	165/225/280/340 ns
DC offset	<18 mV
OC protection delay	500 ns (max)
Shutdown propagation delay	250 ns (max)
Error amplifier open loop gain	>60 dB

Potential applications

- High voltage high power Class D audio amplifier
- High voltage high power PWM amplifier

Product validation

Qualified for industrial applications according to the relevant JEDEC47/20/22

Ordering information

Base Part Number	Package Type	Standard Pack	
		Form and Quantity	
IRS2461S	20 Lead SOICWB	Tape and Reel	1000

400V Class D Audio Amplifier Controller

Description

Description

The IRS2461S integrates high voltage, high performance Class D audio amplifier drivers with PWM modulator and protections. In conjunction with external MOSFET, the IRS2461S forms a single channel Class D audio amplifier. The IRS2461S is designed with floating analog inputs and protection control interface pins convenient for half bridge applications. High and low side MOSFETs are protected from over current conditions by a programmable over current protection. Essential elements of PWM modulator section allow flexible system design. The IRS2461S is a lead-free, ROHS compliant.

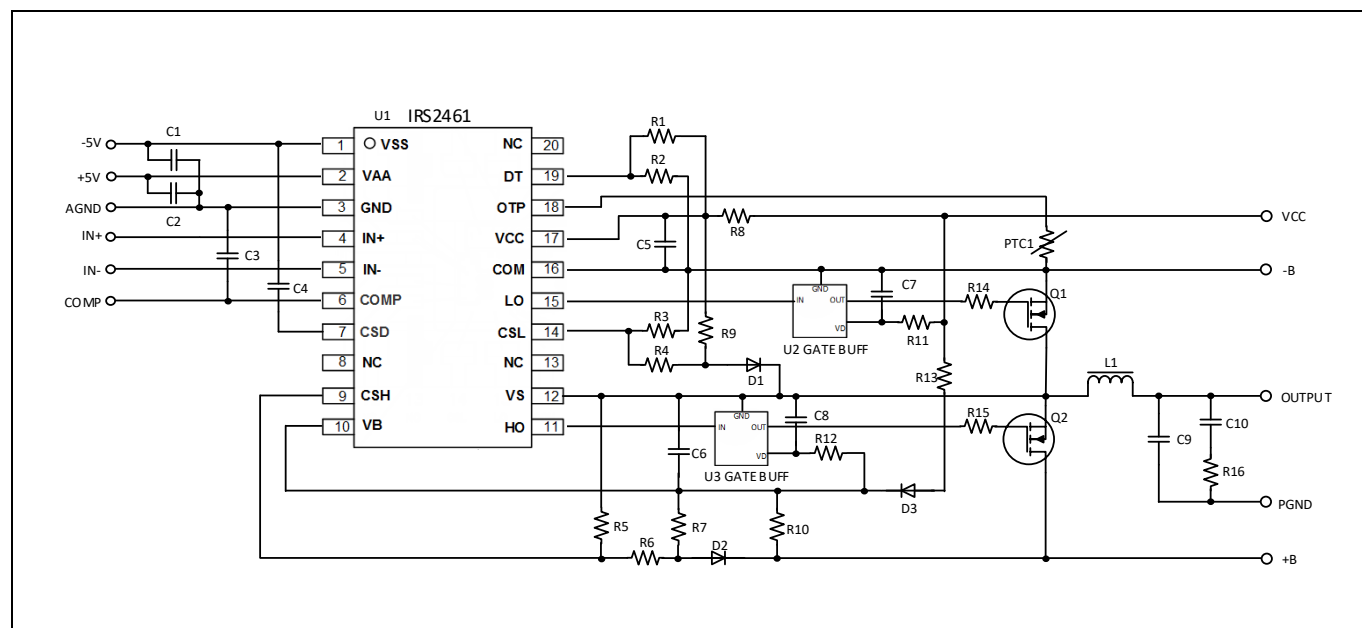


Figure 1 Typical application

400V Class D Audio Amplifier Controller

Table of contents

Table of contents

Features	1
Product summary	1
Potential applications	1
Product validation	1
Qualified for industrial applications according to the relevant JEDEC47/20/22	1
Ordering information	1
Description	2
Table of contents	3
1 Pin configuration and functionality	4
2 Functional block diagram	5
3 Qualification Information	6
4 Characteristics	7
4.1 Package Characteristic	7
4.2 Absolute Maximum Ratings	8
4.3 Operating Conditions	9
4.4 Electrical Characteristics	10
4.5 Waveform definitions	13
5 Package dimensions	16
6 Marking	17
Revision history	18

1 Pin configuration and functionality

The pin configuration is shown in Figure 2 and the functions are described in Table A.

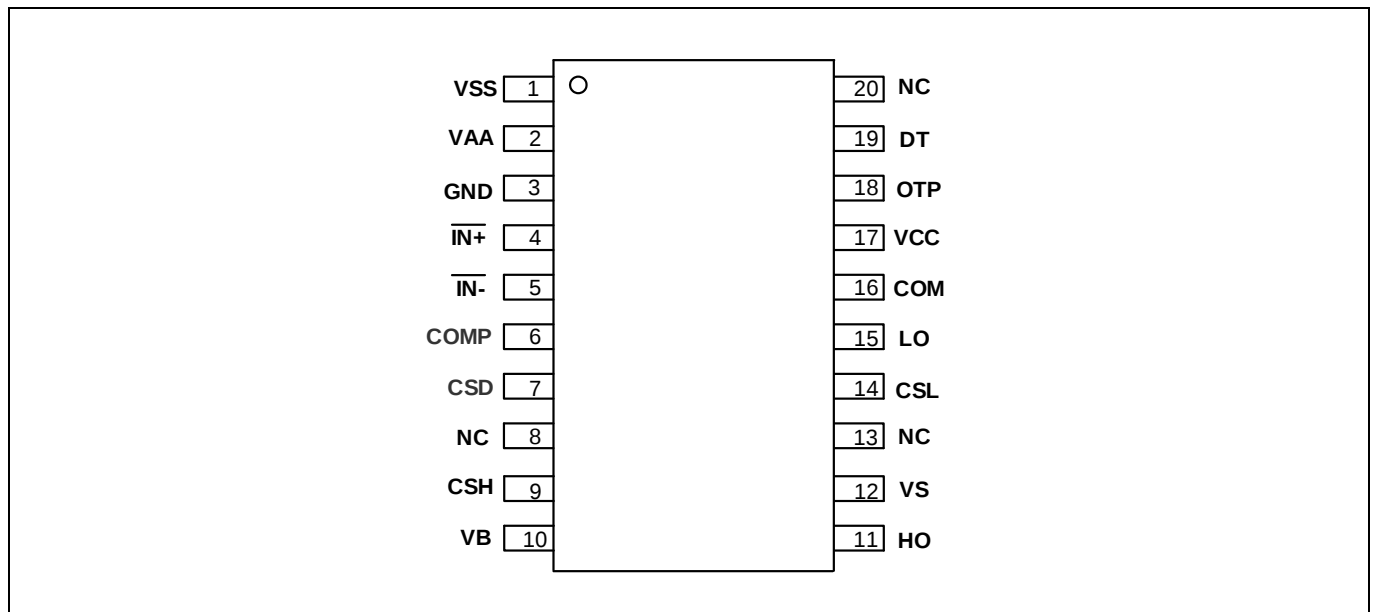


Figure 2 Pin configuration

Table A Pin definitions and functions

Pin	Symbol	Pin type	Function
1	VSS	Input	Floating input negative supply
2	VAA	Input	Floating input positive supply
3	GND	Input	Input reference GND
4	IN+	Input	Non-inverting analog input
5	IN-	Input	Inverting analog input
6	COMP	Input/output	PWM comparator input
7	CSD	Input/output	Protection control
8	NC	-	
9	CSH	Input	High side over current sensing input, referenced to VS
10	VB	Input	High side floating supply
11	HO	Output	High side output
12	VS	Input	High side floating supply return
13	NC	-	
14	CSL	Input	Low side over current sensing input, referenced to COM
15	LO	Output	Low side output
16	COM	Input	Low side gate drive supply return
17	VCC	Input	Low side gate drive supply
18	OTP	Input	OTP sensor input
19	DT	Input	Deadtime program, reference to COM
20	NC	-	

2 Functional block diagram

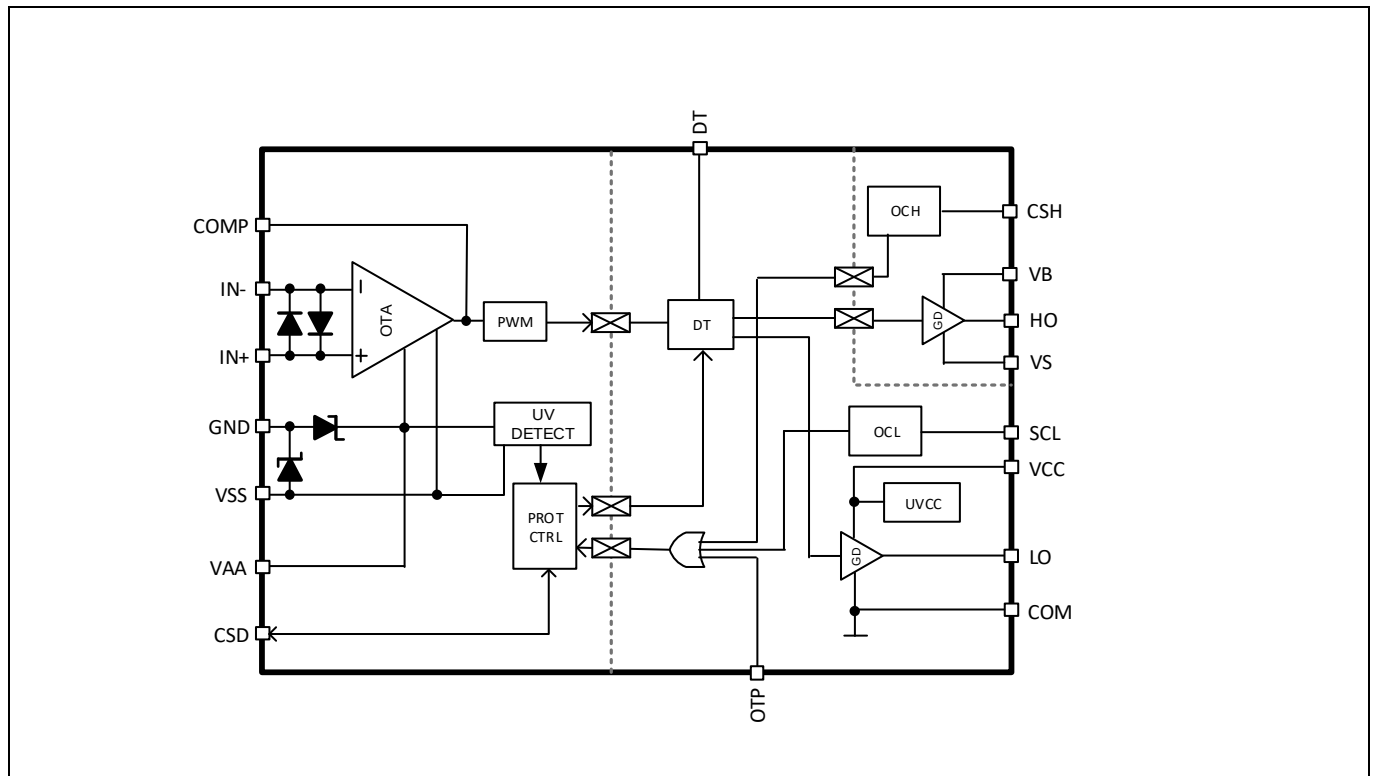


Figure 3 Functional block diagram

3 Qualification Information

Qualification Level		Industrial
Moisture Sensitivity Level		MSL3 (per IPC/JEDEC J-STD-020C)
ESD	Machine Model	Class B (per JEDEC standard EIA/JESD22-A115)
	Human Body Model	Class 1B (per EIA/JEDEC standard JESD22-A114)
	Charge Device Model	Class 0B (per EIA/JEDEC standard JESD22-C101)
IC Latch-Up Test		Class I, Level A (per JESD78)
RoHS Compliant		Yes

4 Characteristics

4.1 Package Characteristic

Symbol	Definition	Min	Max	Units
P _d	Maximum power dissipation @ T _A ≤ +25°C ^{††††}	-	1.14	W
R _{thJA}	Thermal resistance, Junction to ambient ^{††††}	-	65.8	°C/W
T _J	Junction Temperature	-	150	°C
T _S	Storage Temperature	-55	150	°C
T _L	Lead temperature (Soldering, 10 seconds)	-	300	°C

†††† According to JESD51-5. JEDEC still air chamber.

4.2 Absolute Maximum Ratings

Absolute Maximum Ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are absolute voltages referenced to COM=VN; all currents are defined positive into any lead. The Thermal Resistance and Power Dissipation ratings are measured under board mounted and still air conditions.

Symbol	Definition	Min	Max	Units
V_B	High side floating supply voltage	-0.3	415	V
V_S	High side floating supply voltage ^{††}	$V_{Bn} - 15$	$V_{Bn} + 0.3$	V
V_{HO}	High side floating output voltage	$V_{Sn} - 0.3$	$V_{Bn} + 0.3$	V
V_{CSH}	CSH pin input voltage	$V_{Sn} - 0.3$	$V_{Bn} + 0.3$	V
V_{CC}	V_{CC} low side fixed supply voltage ^{††}	-0.3	15.5	V
V_{LO}	Low side output voltage	-0.3	$V_{CC} + 0.3$	V
V_{AA}	Floating input positive supply voltage ^{††}	(See I_{AAZ})	210	V
V_{SS}	Floating input negative supply voltage ^{††}	-1 (See I_{SSZ})	$V_{AA} + 0.3$	V
V_{GND}	Floating input supply ground voltage	$V_{SS} - 0.3$	$V_{AA} + 0.3$	V
I_{IN-}	Inverting input current [†]	-	± 3	mA
V_{CSD}	SD pin input voltage	$V_{SS} - 0.3$	$V_{AA} + 0.3$	V
V_{COMP}	COMP pin input voltage	$V_{SS} - 0.3$	$V_{AA} + 0.3$	V
V_{CLK}	CLK pin input voltage	$V_{SS} - 0.3$	$V_{AA} + 0.3$	V
V_{DT}	DT pin input voltage	-0.3	$V_{CC} + 0.3$	V
V_{OTP}	OTP pin input voltage	-0.3	$V_{CC} + 0.3$	V
V_{CSL}	CSL pin input voltage	-0.3	$V_{CC} + 0.3$	V
I_{AAZ}	Floating input positive supply zener clamp current ^{††}	-	10	mA
I_{CCZ}	Low side V_{CC} supply zener clamp current ^{††}	-	10	mA
I_{BSZ}	Floating supply zener clamp current ^{††}	-	10	mA
dV_S/dt	Allowable V_S voltage slew rate	-	50	V/ns
dV_{SS}/dt	Allowable V_{SS} voltage slew rate ^{†††}	-	50	V/ms

† IN- contains clamping diode to GND.

†† VAA-VSS, VCC-COM, VB-VS contain internal shunt zener diodes. Note that the voltage ratings of these can be limited by the clamping current.

††† For the rising and falling edges of step signal of 10V. VSS=15V to 200V.

4.3 Operating Conditions

For proper operation, the device should be used within the recommended conditions below. The V_S and COM offset ratings are tested with supplies biased at $V_{AA}-V_{SS}=10V$, $V_{CC}=12V$, and $V_B-V_S=12V$. All voltage parameters are absolute voltages referenced to COM; all currents are defined positive into any lead.

Symbol	Definition	Min	Max	Units
V_B	High side floating supply absolute voltage	$V_{Sn} + 10$	$V_{Sn} + 14$	V
V_S	High side floating supply offset voltage	(Note1)	400	V
V_{AA}	Floating input supply voltage	$V_{SS} + 4.5$	$V_{SS} + 15$	V
I_{AAZ}	Floating input positive supply zener clamp current	1	11	mA
V_{SS}	Floating input supply absolute voltage	0	200	V
V_{HO}	High side floating output voltage	V_S	V_B	V
V_{CC}	Low side fixed supply voltage	10	14	V
V_{LO}	Low side output voltage	0	V_{CC}	V
V_{GND}	GND pin input voltage	$V_{SS}^{(Note2)}$	$V_{AA}^{(Note2)}$	V
V_{IN-}	Inverting input voltage	$V_{GND} - 0.5^{(Note2)}$	$V_{GND} + 0.5^{(Note2)}$	V
V_{CSD}	CSD pin input voltage	V_{SS}	V_{AA}	V
V_{COMP}	COMP pin input voltage	V_{SS}	V_{AA}	V
C_{COMP}	COMP pin phase compensation capacitor to GND	2.2	-	nF
V_{CLK}	CLK pin input voltage	V_{SS}	V_{AA}	V
V_{DT}	DT pin input voltage	0	V_{CC}	V
V_{OTP}	OTP pin input voltage	0	V_{CC}	V
V_{CSH}	CSH pin input voltage	V_{Sn}	V_{Bn}	V
V_{CSL}	CSL pin input voltage	0	V_{CC}	V
dV_{SS}/dt	Allowable V_{SS} voltage slew rate upon power-up ^(Note3)	-	50	V/ms
f_{SW}	Switching frequency	-	800	kHz
f_{CLK}	CLK frequency ^(Note4)	-	800	kHz
T_A	Ambient Temperature	-40	125	°C

(Note 1) Logic operational for V_S equal to -5V to +400V. Logic state held for V_S equal to -5V to -VBS.

(Note 2) GND input voltage is limited by IIN-n.

(Note 3) V_{SS} ramps up from 0V to 200V.

(Note 4) The CLK input frequency needs to be within +/-10% of self-oscillating frequency in order to synchronize PWM in a typical self-oscillating application.

(Note 4) The CLK input frequency needs to be within +/-10% of self-oscillating frequency in order to synchronize PWM in a typical self-oscillating application.

4.4 Electrical Characteristics

VCC=VBS=VDT=12V, VSS=VS=COM=0V, VGND=5V, VAA=10V, CL=1nF and TA=25°C unless otherwise specified.

Symbol	Definition	Min	Typ	Max	Units	Test Conditions
Low Side Supply						
UV _{CC+}	V _{CC} supply UVLO positive threshold	8.4	8.9	9.4	V	
UV _{CC-}	V _{CC} supply UVLO negative threshold	8.2	8.7	9.2	V	
UV _{CCHYS}	UV _{CC} hysteresis	-	0.2	-	V	
I _{QCC}	Low side quiescent current	-	-	6	mA	V _{DT} =V _{CC}
V _{CLAMPL}	Low side zener diode clamp voltage	14.7	15.3	16.2	V	I _{CC} =5mA
High Side Floating Supply						
UV _{BS+}	High side well UVLO positive threshold	8.0	8.5	9.0	V	
UV _{BS-}	High side well UVLO negative threshold	7.8	8.3	8.8	V	
UV _{BHYS}	UV _{BS} hysteresis	-	0.2	-	V	
I _{QBS}	High side quiescent current	-	-	1	mA	
I _{LKH}	High to Low side leakage current	-	-	50	μA	V _B =V _S =400V
V _{CLAMPH}	High side zener diode clamp voltage	14.7	15.3	16.2	V	I _{BS} =5mA
Floating Input Supply						
UV _{AA+}	V _{AA} floating supply UVLO positive threshold from V _{SS}	8.2	8.7	9.2	V	GND pin floating
UV _{AA-}	V _{AA} floating supply UVLO negative threshold from V _{SS}	7.7	8.2	8.7	V	GND pin floating
UV _{AAHYS}	UV _{AA} hysteresis	-	0.5	-	V	GND pin floating
I _{QAASD}	Floating Input positive quiescent supply current in shutdown mode	-	2	3	mA	V _{CSD} =V _{GND}
I _{QAA0}	Floating Input positive quiescent supply current, positive input	-	4	6	mA	V _{IN-} =V _{SS} +5.2V
I _{QAA1}	Floating Input positive quiescent supply current, negative input	-	3	4	mA	V _{IN-} =V _{SS} +4.8V
I _{QAASD}	Floating Input positive quiescent supply current in start-up mode	-	3	4	mA	V _{CSD} =V _{GND} +2.5V
I _{LKM}	Floating input side to Low side leakage current	-	-	50	μA	V _{AA} =V _{SS} =V _{GND} =100V
V _{CLAMPM}	Floating supply zener diode clamp voltage	14.7	15.3	16.2	V	I _{AA} =5mA, V _{CSD} =V _{GND}

Characteristics

Symbol	Definition	Min	Typ	Max	Units	Test Conditions
Audio Input (GND=0V, $V_{AA}=5V$, $V_{SS}=-5V$, COM = $V_{CC}=-5V$, $V_S=CSH=-5V$, DT=-5V)						
V_{OS}	Input offset voltage	-18	0	18	mV	
I_{BIN}	Input bias current	-	-	40	nA	
GBW	Small signal bandwidth	-	5 Note 1	-	MHz	$C_{COMPn}=2.2nF$, Rf=10k, Note 1
V_{COMP}	OTA Output voltage	$V_{AA}-1$	-	$V_{SS}+1$	V	
g_m	OTA transconductance	80	200	260	mS	$V_{IN}=10mV$
G_V	OTA gain	60	-	-	dB	
V_{Nrms}	OTA input noise voltage	-	250	-	mVrms	BW=20kHz, Resolution BW=22Hz Fig.8
SR	Slew rate	-	± 5	-	V/us	$C_{COMP}=2.2nF$
CMRR	Common-mode rejection ratio	-	60	-	dB	
PSRR	Supply voltage rejection ratio	-	65	-	dB	
PWM Comparator						
V_{thPwm}	PWM comparator threshold in COMP	-	$(V_{AA} - V_{SS})/2$	-	V	
f_{OTA}	COMP pin star-up local oscillation frequency	-	0.6	-	MHz	$V_{CSD} = V_{GND} + 2.5V$
Protection						
V_{thOCL}	Low side OC threshold in V_{CSL}	1.1	1.2	1.3	V	
V_{thOCH}	High side OC threshold in V_{CSH}	$1.1 + V_S$	$1.2 + V_S$	$1.3 + V_S$	V	$V_S=400V$
V_{th1}	CSD pin shutdown release threshold	$0.52 \times V_{AA-GND}$	$0.68 \times V_{AA-GND}$	$0.84 \times V_{AA-GND}$	V	
V_{th2}	CSD pin self reset threshold	$0.26 \times V_{AA-GND}$	$0.30 \times V_{AA-GND}$	$0.34 \times V_{AA-GND}$	V	
I_{CSD+}	CSD pin discharge current	70	100	130	μA	$V_{CSD} = V_{GND} + 2.4V$
I_{CSD-}	CSD pin charge current	70	100	130	μA	$V_{CSD} = V_{GND} + 2.4V$
t_{SSD}	Shutdown propagation delay from $V_{CSD} < V_{GND} + V_{th1}$ to Shutdown	-	140	250	ns	
t_{OCH}	Propagation delay time from $V_{CSHn} > V_{thOCHn}$ to Shutdown	-	400	500	ns	
t_{OCL}	Propagation delay time from $V_{Sn} > V_{thOCL}$ to Shutdown	-	270	350	ns	
V_{OTP}	OTP pin input threshold	-	2.8	-	V	
I_{OTP}	OTP bias sourcing current	-	0.6	-	mA	OTP=0V

Characteristics

Symbol	Definition	Min	Typ	Max	Units	Test Conditions
Gate Driver						
I_{O+}	Output high short circuit current (Source)	-	0.5	-	A	$V_O=0V$, $PW \leq 10\mu S$, Note 1
I_{O-}	Output low short circuit current (Sink)	-	0.6	-	A	$V_O=12V$, $PW \leq 10\mu S$, Note 1
V_{OL}	Low level output voltage LO – COM, HO – VS	-	-	0.1	V	$I_O=0A$
V_{OH}	High level output voltage VCC – LO, VB – HO	-	-	1.4	V	
T_{on0}	High and low side turn-on propagation delay	-	505	-	ns	$V_{DT} = COM$
T_{off0}	High and low side turn-off propagation delay	270	340	410	ns	
T_{offskw}	Toff skew, $T_{offhon} - T_{offlon}$	-30	0	30	ns	
t_r	Turn-on rise time	-	12	25	ns	
t_f	Turn-off fall time	-	12	25	ns	
DT1	Deadtime: LOn turn-off to HOn turn-on (DT_{LO-HO}) & HOn turn-off to LOn turn-on (DT_{HO-LO})	130	165	200	ns	$V_{DT} > V_{DT1}$, $V_{DTM} = COM$
DT2	Deadtime: LOn turn-off to HOn turn-on (DT_{LO-HO}) & HOn turn-off to LOn turn-on (DT_{HO-LO})	180	225	270	ns	$V_{DT1} > V_{DT} > V_{DT2}$, $V_{DTM} = COM$
DT3	Deadtime: LOn turn-off to HOn turn-on (DT_{LO-HO}) & HOn turn-off to LOn turn-on (DT_{HO-LO})	225	280	335	ns	$V_{DT2} > V_{DT} > V_{DT3}$, $V_{DTM} = COM$
DT4	Deadtime: LOn turn-off to HOn turn-on (DT_{LO-HO}) & HO turn-off to LOn turn-on (DT_{HO-LO}) $V_{DT} = V_{DT4}$	275	340	405	ns	$V_{DT} < V_{DT3}$, $V_{DTM} = COM$
V_{DT1}	DT mode select threshold 1	$0.51 \times V_{CC}$	$0.57 \times V_{CC}$	$0.63 \times V_{CC}$	V	$V_{DTM} = COM$
V_{DT2}	DT mode select threshold 2	$0.32 \times V_{CC}$	$0.36 \times V_{CC}$	$0.40 \times V_{CC}$	V	
V_{DT3}	DT mode select threshold 3	$0.21 \times V_{CC}$	$0.23 \times V_{CC}$	$0.25 \times V_{CC}$	V	

Note 1 Guaranteed by design, but not tested in production.

4.5 Waveform definitions

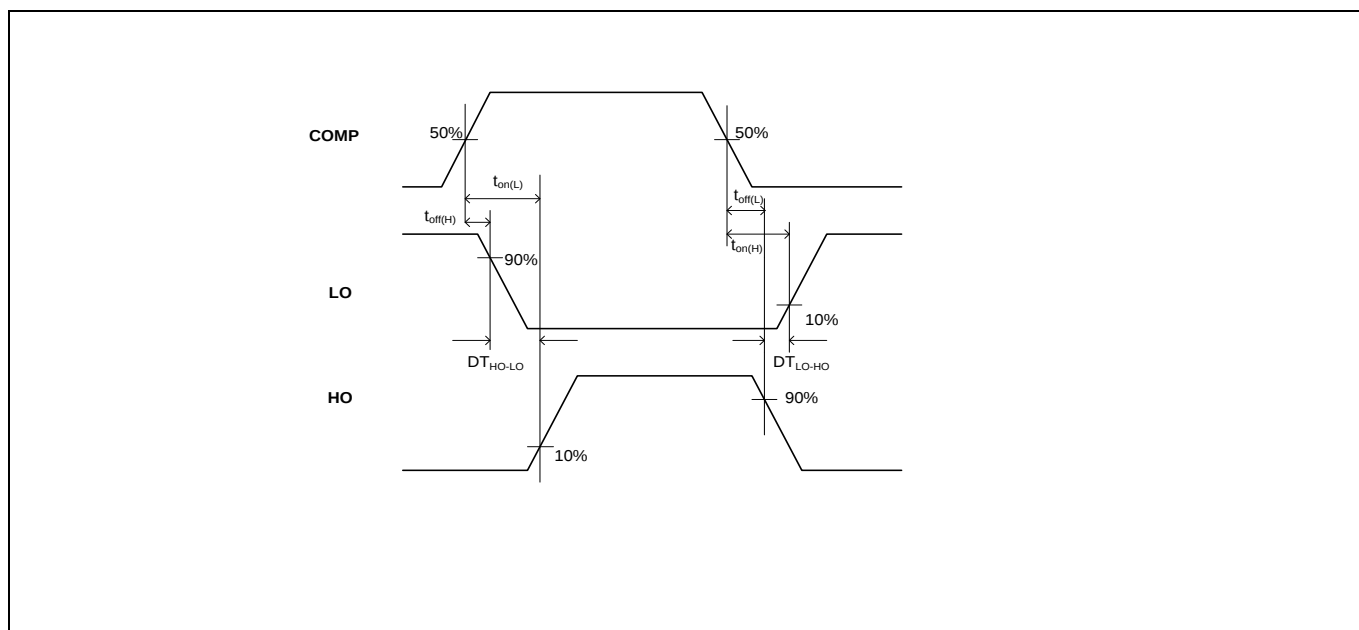


Figure 4 Switching time waveform definitions

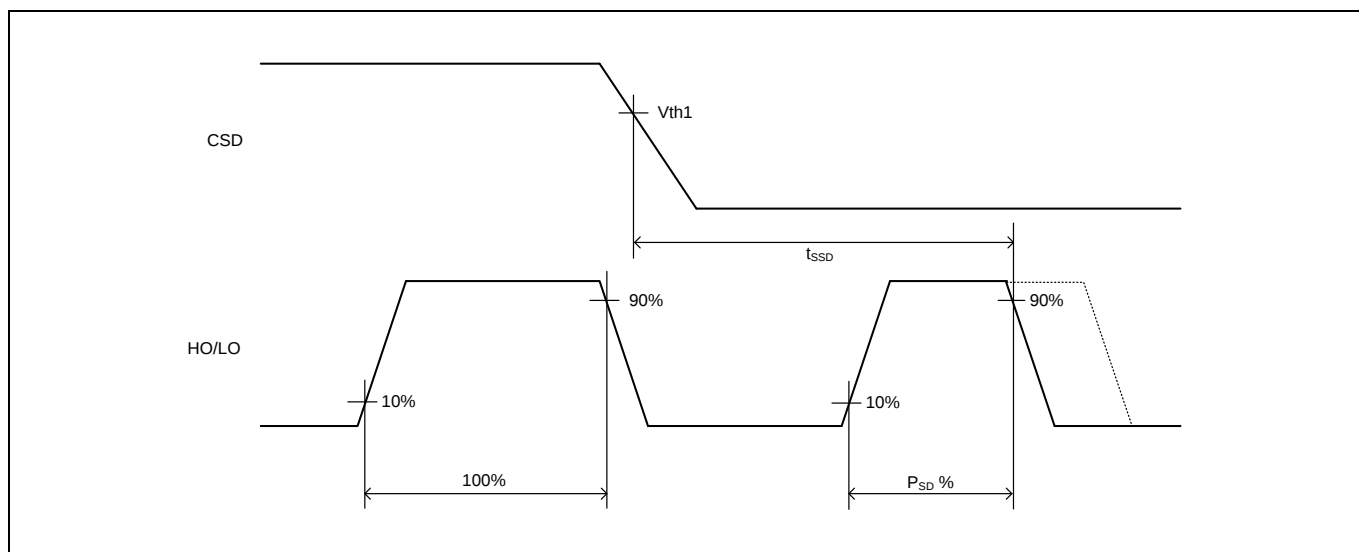


Figure 5 CSD to shutdown waveform definitions

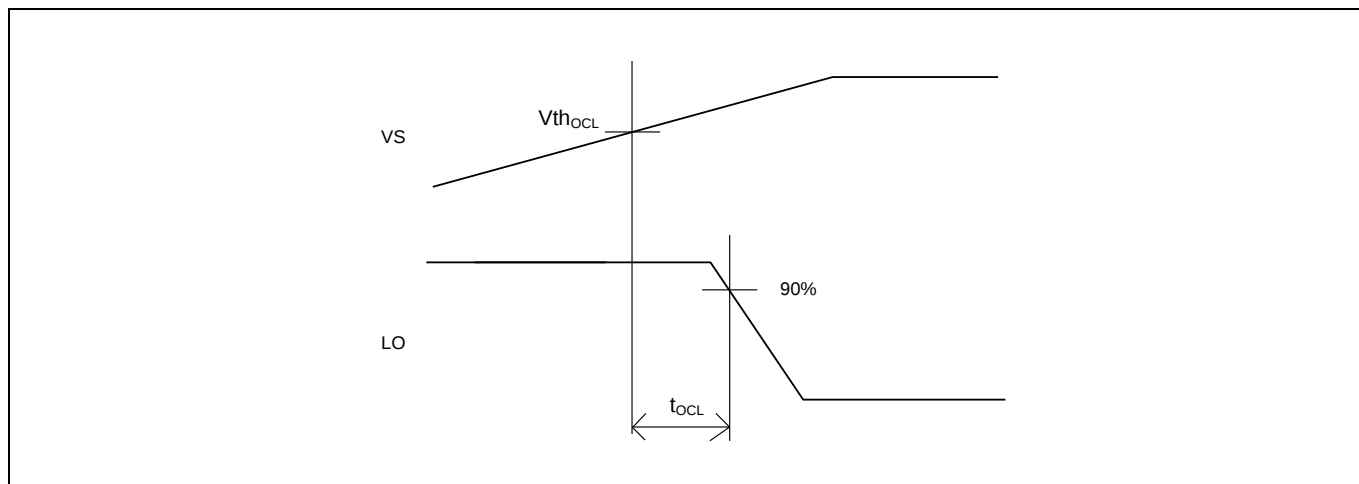


Figure 6 $V_S > V_{th_{OCL}}$ to shutdown waveform

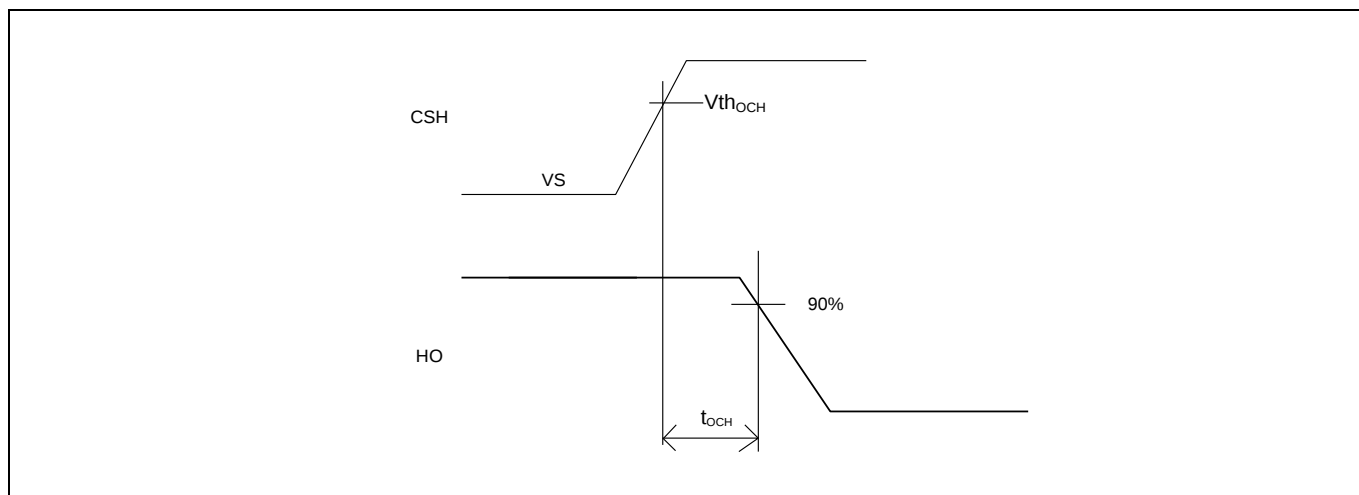


Figure 7 $V_{CSH} > V_{th_{OCH}}$ to shutdown waveform

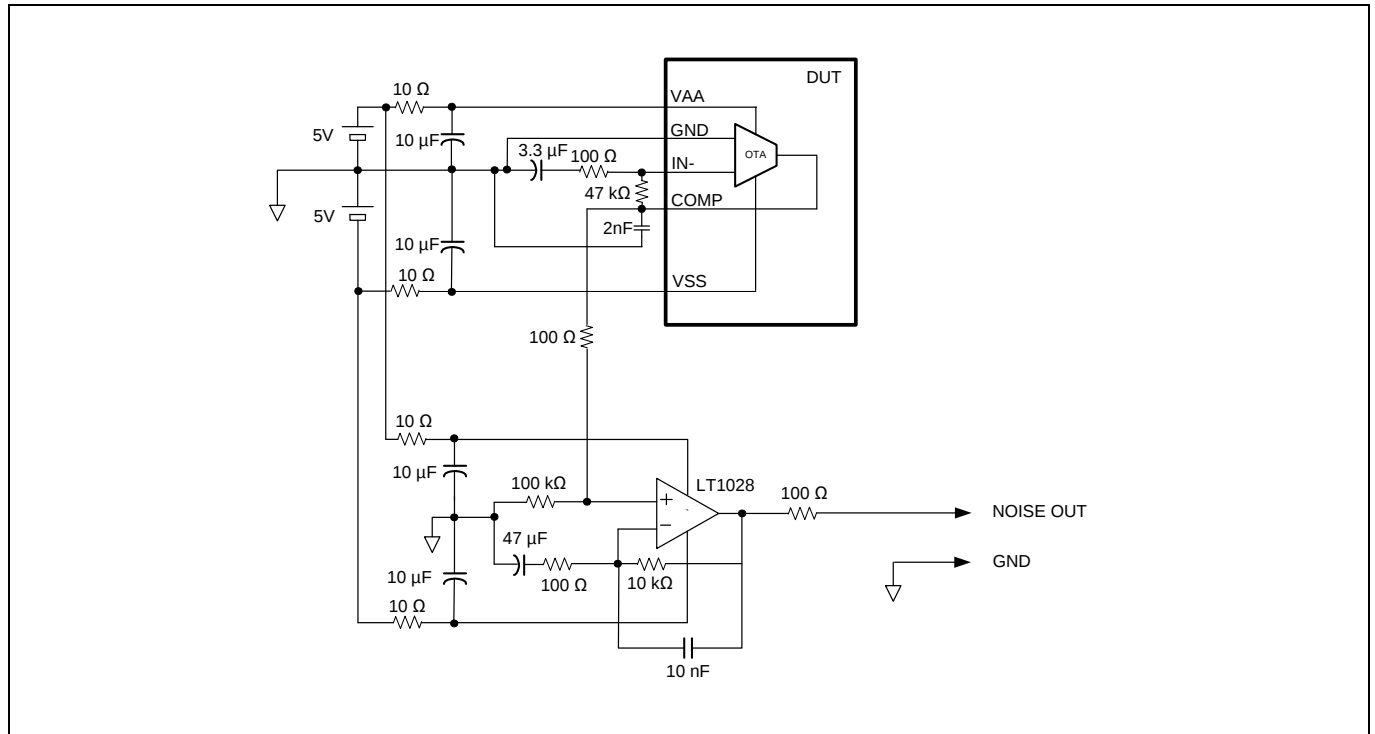


Figure 8 OTA input noise voltage measuring circuit

5 Package dimensions

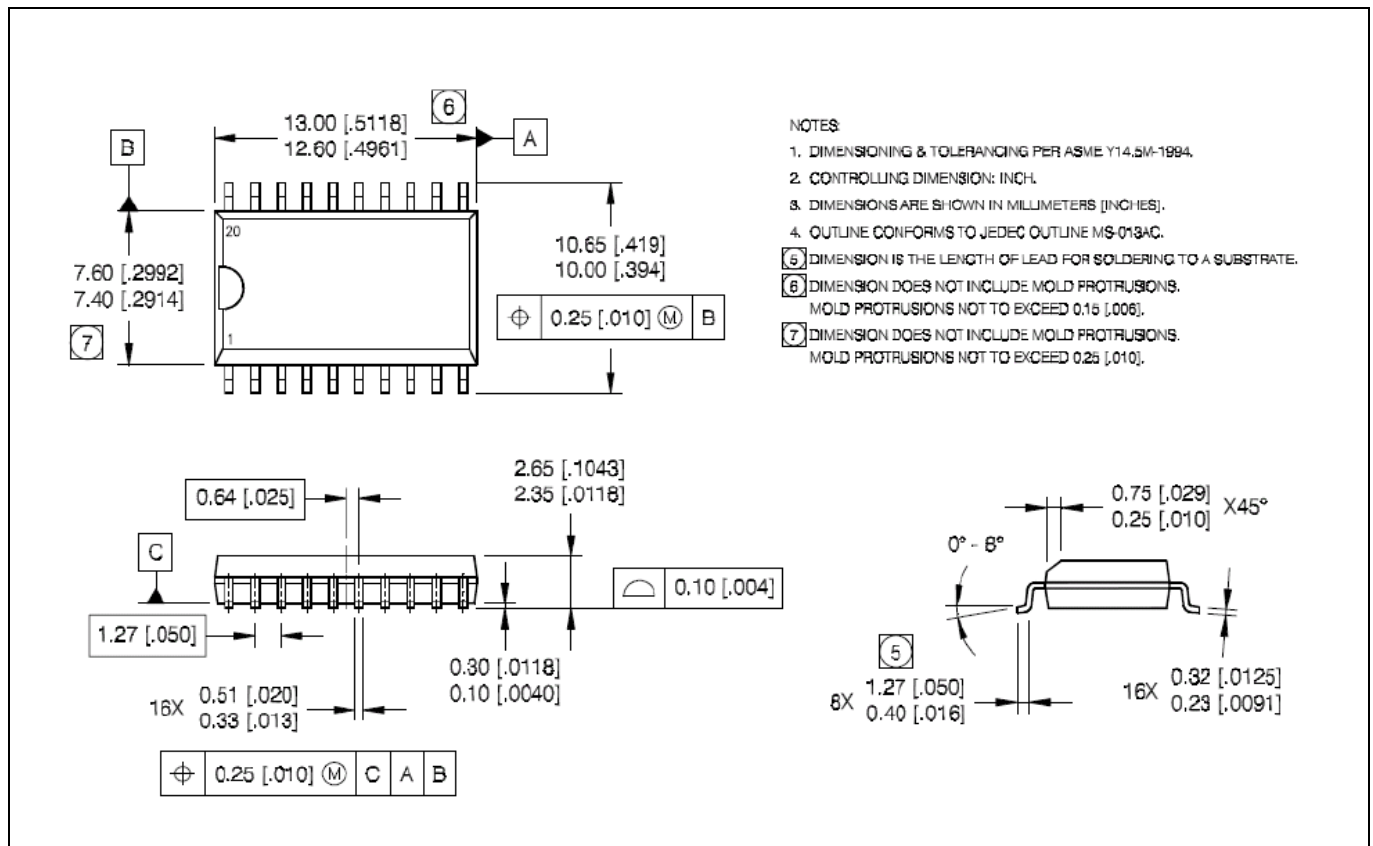


Figure 9 20 Lead SOIC (wide body)

6 Marking

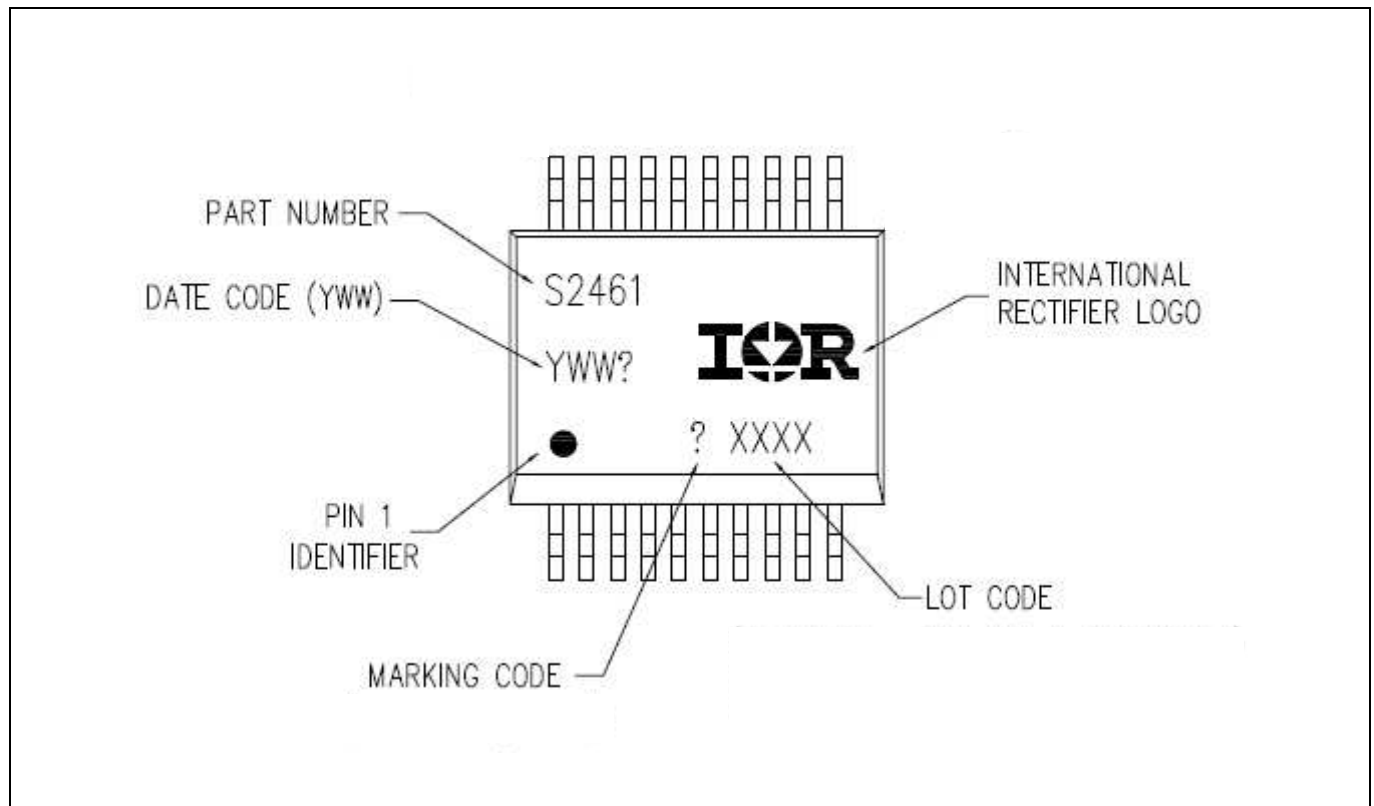


Figure 10 Top marking (laser)

Revision History

IRS2461S

Revision: 2019-06-04, Rev. 2.3

Previous Revision

Revision	Date	Subjects (major changes since last revision)
1.2	2018-06-26	unified part name to IRS2461S
2.3	2019-06-04	added ton(typ)

Trademarks

All referenced product or service names and trademarks are the property of their respective owners.

We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all? Your feedback will help us to continuously improve the quality of this document. Please send your proposal (including a reference to this document) to:

erratum@infineon.com

Published by

Infineon Technologies AG

81726 München, Germany

© 2019 Infineon Technologies AG

All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie").

With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

In addition, any information given in this document is subject to customer's compliance with its obligations stated in this document and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Infineon Technologies in customer's applications.

The data contained in this document is exclusively intended for technically trained staff. It is the responsibility of customer's technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to such application.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

The Infineon Technologies component described in this Data Sheet may be used in life-support devices or systems and/or automotive, aviation and aerospace applications or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support, automotive, aviation and aerospace device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Infineon:](#)

[IRS2461SXUMA1](#)