

DIN 46237

VINYL-INSULATED RING TERMINALS

MAXIMUM ELECTRIC CURRENT:

A.W.G.	12	10	8	6	4
AMP.	35	50	70	95	125

MAXIMUM ELECTRICAL RATING: 105°C 600 VOLTS MAX.


INSULATION MATERIAL: VINYL

INSULATION COLOR:

12-10 A.W.G.: YELLOW 8 A.W.G.: RED 6 A.W.G.: BLUE

4 A.W.G.: YELLOW

TERMINAL MATERIAL: COPPER

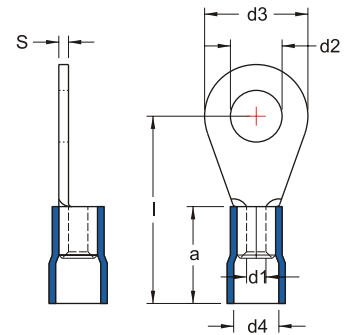

WIRE RANGE A.W.G. mm ²	ITEM NO.		STUD SIZE		DIMENSION mm						CRIMPING TOOL	Q'TY BOX		
	BRAZED SEAM	BUTTED SEAM	d2		d3	I	d1	d4	a	S				
12-10 A.W.G. 2.5-6 mm ²	DRVB3-6	DRV3-6	#4	3.2	6.0	21.0	3.6	6.3	13.0	1.0	IZUMI MODEL 5 WITH DIE INDEX COLOR:YELLOW OR K.S. MODEL KST2000A HRI-126J KSTLY-2004 KSTLY-2005 WITH DIE INDEX COLOR:YELLOW	500		
	DRVB4-6	DRV4-6	#8	4.3	8.0	21.0						500		
	DRVB5-6	DRV5-6	#10	5.3	10.0	22.0						500		
	DRVB6-6	DRV6-6	1/4	6.5	11.0	22.5						500		
	DRVB8-6	DRV8-6	5/16	8.4	14.0	26.0						500		
	DRVB10-6	DRV10-6	3/8	10.5	18.0	28.0						500		
	DRVB12-6	DRV12-6	1/2	13.0								500		
8 A.W.G. 10 mm ²	DRVB4-10		#8	4.3	10.0	24.5	4.5	8.0	16.5	1.1		500		
	DRVB5-10		#10	5.3								500		
	DRVB6-10		1/4	6.5								11.0	25.5	500
	DRVB8-10		5/16	8.4								14.0	28.5	500
	DRVB10-10		3/8	10.5								18.0	29.5	250
	DRVB12-10		1/2	13.0								22.0	31.5	250
6 A.W.G. 16 mm ²	DRVB5-16		#10	5.3	11.0	31.5	5.8	10.5	21.5	1.2		250		
	DRVB6-16		1/4	6.5								100		
	DRVB8-16		5/16	8.4								14.0	33.5	100
	DRVB10-16		3/8	10.5								18.0	35.5	100
	DRVB12-16		1/2	13.0								22.0	37.5	100
4 A.W.G. 25 mm ²	DRVB5-25		#10	5.3	12.0	38.0	7.5	13.0	24.0	1.5		100		
	DRVB6-25		1/4	6.5								100		
	DRVB8-25		5/16	8.4								16.0	100	
	DRVB10-25		3/8	10.5								18.0	39.0	100
	DRVB12-25		1/2	13.0								22.0	44.0	100
	DRVB16-25		5/8	17.0								28.0	48.0	100



ALL LISTED

©: NOT UL AND C-UL LISTED

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

KS Terminals:

[DRV10-6](#) [DRV12-6](#) [DRV4-6](#) [DRV5-6](#) [DRV6-6](#) [DRV8-6](#)