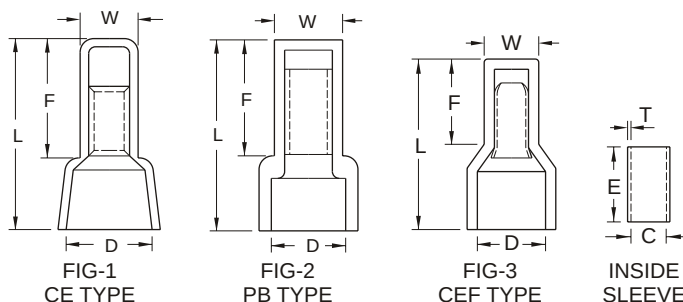


CLOSED END CONNECTORS

MAXIMUM ELECTRIC CURRENT:

A.W.G.	22	20	18	16	14	12	10	8
AMP.	9	12	17	18	30	35	50	70

MAXIMUM ELECTRICAL RATING: 105°C 600 VOLTS MAX.
CE & PB TYPE INSIDE SLEEVE IS COPPER TUBE.
CEF TYPE INSIDE SLEEVE IS STEEL DRAWN.


WIRE RANGE A.W.G. mm ²	ITEM NO.	Standard	DIMENSION inch mm							FIG	CRIMPING TOOL	Q'TY BOX
			W	F	L	D	E	T	C			
22-16 A.W.G. 1.25 mm ²	CE1	UL CSA	.197 5.0	.535 13.6	.827 21.0	.315 8.0	.276 7.0	.020 0.5	.091 2.3	1	IZUMI 7A OR K.S. MODEL KST2000G	1000
16-14 A.W.G. 2 mm ²	CE2	UL CSA	.217 5.5	.547 13.9	.827 21.0	.315 8.0	.276 7.0	.018 0.45	.122 3.1	1	IZUMI 7A OR K.S. MODEL KST2000G	1000
12-10 A.W.G. 5.5 mm ²	CE5	UL CSA	.295 7.5	.575 14.6	1.004 25.5	.394 10.0	.295 7.5	.028 0.7	.157 4.0	1	IZUMI 7A OR K.S. MODEL KST2000G	500
8 A.W.G. 8 mm ²	CE8	UL CSA	.370 9.4	.709 18.0	1.173 29.8	.472 12.0	.335 8.5	.049 1.25	.173 4.4	1	IZUMI 8	250
22-16 A.W.G. 1.25 mm ²	PB1	UL CSA	.197 5.0	.346 8.8	.598 15.2	.236 6.0	.276 7.0	.020 0.5	.091 2.3	2	IZUMI 7A OR K.S. MODEL KST2000G	1000
16-14 A.W.G. 2 mm ²	PB2	UL CSA	.228 5.8	.346 8.8	.598 15.2	.248 6.3	.276 7.0	.018 0.45	.122 3.1	2	IZUMI 7A OR K.S. MODEL KST2000G	1000
12-10 A.W.G. 5.5 mm ²	PB5	UL CSA	.287 7.3	.346 8.8	.701 17.8	.362 9.2	.295 7.5	.028 0.7	.157 4.0	2	IZUMI 7A OR K.S. MODEL KST2000G	500
8 A.W.G. 8 mm ²	PB8	UL CSA	.370 9.4	.465 11.8	.866 22.0	.465 11.8	.315 8.0	.049 1.25	.197 5.0	2	IZUMI 8	250
22-16 A.W.G. 1.25 mm ²	CEF2216		.197 5.0	.366 9.3	.602 15.3	.295 7.5	.295 7.5	.015 0.38	.093 2.35	3	K.S. MODEL KST2000G	1000
16-14 A.W.G. 2 mm ²	CEF2214		.224 5.7	.398 10.1	.728 18.5	.315 8.0	.295 7.5	.014 0.35	.118 3.0	3	K.S. MODEL KST2000G	1000
12-10 A.W.G. 5.5 mm ²	CEF1810		.311 7.9	.378 9.6	.787 20.0	.402 10.2	.335 8.5	.016 0.4	.197 5.0	3	K.S. MODEL KST2000G	500
8 A.W.G. 8 mm ²	CEF188		.339 8.6	.500 12.7	.945 24.0	.488 12.4	.335 8.5	.016 0.4	.232 5.9	3	K.S. MODEL KST2000G	250
22-16 A.W.G. 1.25 mm ²	CE1-		.197 5.0	.535 13.6	.827 21.0	.315 8.0	.268 6.8	.014 0.35	.102 2.6	1	IZUMI 7A OR K.S. MODEL KST2000G	1000
16-14 A.W.G. 2 mm ²	CE2-		.217 5.5	.547 13.9	.827 21.0	.315 8.0	.268 6.8	.014 0.35	.130 3.3	1	IZUMI 7A OR K.S. MODEL KST2000G	1000
12-10 A.W.G. 5.5 mm ²	CE5-		.295 7.5	.575 14.6	1.004 25.5	.394 10.0	.287 7.3	.018 0.45	.177 4.5	1	IZUMI 7A OR K.S. MODEL KST2000G	500
8 A.W.G. 8 mm ²	CE8-		.370 9.4	.709 18.0	1.173 29.8	.472 12.0	.327 8.3	.037 0.95	.197 5.0	1	IZUMI 8	250
22-16 A.W.G. 1.25 mm ²	PB1-		.197 5.0	.346 8.8	.598 15.2	.236 6.0	.268 6.8	.014 0.35	.102 2.6	2	IZUMI 7A OR K.S. MODEL KST2000G	1000
16-14 A.W.G. 2 mm ²	PB2-		.228 5.8	.346 8.8	.598 15.2	.248 6.3	.268 6.8	.014 0.35	.130 3.3	2	IZUMI 7A OR K.S. MODEL KST2000G	1000
12-10 A.W.G. 5.5 mm ²	PB5-		.287 7.3	.346 8.8	.701 17.8	.362 9.2	.287 7.3	.018 0.45	.177 4.5	2	IZUMI 7A OR K.S. MODEL KST2000G	500
8 A.W.G. 8 mm ²	PB8-		.370 9.4	.465 11.8	.866 22.0	.465 11.8	.327 8.3	.037 0.95	.197 5.0	2	IZUMI 8	250

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[KS Terminals:](#)

[PB1](#) [PB2](#) [PB5](#) [PB8](#)