



MPCI-L2 series

Multi-mode LTE Cat 4 Mini PCIe modules with HSPA+ and/or 2G fallback

Data sheet



Abstract

Technical data sheet describing MPCI-L2 series multi-mode cellular modules. The modules are a complete and cost-efficient LTE/3G/2G multi-mode solution offering up to 150 Mbit/s download data rate and up to 50 Mbit/s upload data rate. The different variants offer a selection of coverage of up to six LTE bands, up to five WCDMA/DC-HSPA+ bands and up to four GSM/EGPRS bands. The modules have the industry standard PCI Express Mini Card form factor, which enables easy integration into an application board and is also ideal for manufacturing of small series.

Document information

Title	MPCI-L2 series	
Subtitle	Multi-mode LTE Cat 4 Mini PCIe modules with HSPA+ and/or 2G fallback	
Document type	Data sheet	
Document number	UBX-13004749	
Revision and date	R29	02-Dec-2021
Disclosure restriction	C1-Public	

Product status	Corresponding content status	
Functional Sample	Draft	For functional testing. Revised and supplementary data will be published later.
In development / Prototype	Objective specification	Target values. Revised and supplementary data will be published later.
Engineering sample	Advance information	Data based on early testing. Revised and supplementary data will be published later.
Initial production	Early production information	Data from product verification. Revised and supplementary data may be published later.
Mass production / End of life	Production information	Document contains the final product specification.

This document applies to the following products:

Product name	Type number	Modem version	Application version	PCN reference	Product status	
MPCI-L200	MPCI-L200-00S-00	09.71	A01.15	UBX-14044437	Obsolete	
	MPCI-L200-00S-01	09.71	A01.30	UBX-16026448	Obsolete	
	MPCI-L200-02S-00	15.90	A01.00	UBX-15029946	Obsolete	
	MPCI-L200-02S-01	15.90	A01.10	UBX-16031212	Obsolete	
	MPCI-L200-03S-00	15.90	A01.50	UBX-17022983	Obsolete	
		15.90	A01.52	UBX-19058317	End of life	
	MPCI-L200-03S-02	17.00	A01.00	UBX-20033492	End of life	
MPCI-L200-03S-03	17.00	A01.01	UBX-21036626	Mass production		
MPCI-L201	MPCI-L201-01S-00	09.93	A01.07	UBX-18012849	Obsolete	
	MPCI-L201-02S-00	09.93	A02.50	UBX-17013932	Obsolete	
		For Verizon: 09.94	For Verizon: A01.02			
		09.93	A02.52	UBX-19058317	Obsolete	
	MPCI-L201-02S-01	For Verizon: 10.04	For Verizon: A01.01			
		20.03	A01.02	UBX-19000820	Obsolete	
		For Verizon: 20.03	For Verizon: A01.02			
	MPCI-L201-02S-01	20.03	A01.04	UBX-19058317	Obsolete	
		For Verizon: 20.04	For Verizon: A01.00			
MPCI-L201-02S-02		20.06	A01.00	UBX-20036068	End of life	
MPCI-L201-02S-03	20.06	A01.01	UBX-21036626	Mass production		
MPCI-L210	MPCI-L210-00S-00	09.71	A01.15	UBX-14044437	Obsolete	
	MPCI-L210-02S-00	15.63	A01.03	UBX-15029946	Obsolete	
	MPCI-L210-02S-01	15.63	A01.10	UBX-16031212	Obsolete	
	MPCI-L210-03S-00	15.63	A01.50	UBX-17022983	Obsolete	
		15.63	A01.52	UBX-19058317	Obsolete	
	MPCI-L210-03S-01	16.19	A01.04	UBX-20027569	End of life	
	MPCI-L210-03S-02	17.00	A01.00	UBX-20033492	End of life	
	MPCI-L210-03S-03	17.00	A01.01	UBX-21036626	Mass production	
	MPCI-L210-60S-00	09.94	A01.00	UBX-15021694	Obsolete	
	MPCI-L210-60S-01	09.94	A01.01	UBX-19042394	Obsolete	
		09.94	A01.08	UBX-19058317	Obsolete	
	MPCI-L210-63S-00	09.94	A01.07	UBX-20009693	End of life	
	MPCI-L210-63S-01	09.95	A01.01	UBX-20058840	Mass production	
	MPCI-L220	MPCI-L220-02S-00	15.93	A01.00	UBX-16025501	Obsolete
			15.93	A01.04	UBX-19058317	End of life
MPCI-L220-02S-01		16.25	A01.00	UBX-20058840	Mass production	
MPCI-L220-62S-00		16.04	A01.00	UBX-17013073	Obsolete	
		16.04	A01.02	UBX-19058317	End of life	
MPCI-L220-62S-01	16.50	A01.00	UBX-20058840	Mass production		
MPCI-L280	MPCI-L280-02S-00	15.63	A01.03	UBX-15029946	Obsolete	
	MPCI-L280-02S-01	15.63	A01.10	UBX-16031212	Obsolete	
	MPCI-L280-03S-00	15.63	A01.50	UBX-17022983	Obsolete	
		15.63	A01.52	UBX-19058317	Obsolete	
	MPCI-L280-03S-02	17.00	A01.00	UBX-20033492	End of life	
	MPCI-L280-03S-03	17.00	A01.01	UBX-21036626	Mass production	

u-blox or third parties may hold intellectual property rights in the products, names, logos and designs included in this document. Copying, reproduction, modification or disclosure to third parties of this document or any part thereof is only permitted with the express written permission of u-blox.

The information contained herein is provided "as is" and u-blox assumes no liability for its use. No warranty, either express or implied, is given, including but not limited to, with respect to the accuracy, correctness, reliability and fitness for a particular purpose of the information. This document may be revised by u-blox at any time without notice. For the most recent documents, visit www.u-blox.com.

Copyright © u-blox AG.

Contents

Document information	2
Contents	4
1 Functional description	6
1.1 Overview	6
1.2 Product features	6
1.3 Block diagram	7
1.4 Product description	7
1.5 AT command support	8
1.6 Supported features	9
2 Interfaces	11
2.1 Module supply input	11
2.2 Antenna RF interfaces	11
2.3 System functions.....	11
2.3.1 Module power-on	11
2.3.2 Module power-off.....	11
2.3.3 Module reset	11
2.4 SIM interface.....	12
2.5 USB interface.....	12
2.6 W_DISABLE#.....	13
2.7 LED_WWAN#	13
3 Pin definition	14
3.1 Pin assignment.....	14
4 Electrical specifications	16
4.1 Absolute maximum rating.....	16
4.1.1 Maximum ESD.....	16
4.2 Operating conditions.....	17
4.2.1 Operating temperature range.....	17
4.2.2 Supply/power pins	17
4.2.3 Current consumption.....	17
4.2.4 LTE/3G/2G RF characteristics	18
4.2.5 PERST# pin	18
4.2.6 W_DISABLE# pin.....	18
4.2.7 LED_WWAN# pin	18
4.2.8 USB pins	19
4.2.9 SIM pins	19
5 Mechanical specifications	20
6 Qualification and approvals.....	21
6.1 Reliability tests	21
6.2 Approvals	21
7 Product handling.....	22
7.1 Packaging	22
7.2 ESD precautions.....	22

8	Default settings	23
9	Labeling and ordering information	24
9.1	Product labeling.....	24
9.2	Explanation of codes	25
9.3	Ordering information.....	26
	Appendix	27
	Related documentation	29
	Revision history	29
	Contact.....	31

1 Functional description

1.1 Overview

The MPCI-L2 series comprises complete and cost-efficient LTE/3G/2G multi-mode cellular modules in the industry standard PCI Express Mini Card form factor, which enables an easy integration into an application board, and it is also ideal for manufacturing of small series.

MPCI-L2 modules support up to six LTE bands, up to five UMTS/DC-HSPA+ bands and up to four GSM/(E)GPRS bands for data transmission over different regions and network operators.

With LTE Category 4 data rates of 150 Mb/s (downlink) and 50 Mb/s (uplink), the modules are ideal for applications requiring the highest data-rates and high-speed internet access.

Typical applications are industrial computing, ruggedized terminals, video communications, wireless routers, alarm panels and surveillance, digital signage, and payment systems.

1.2 Product features

Model	LTE		UMTS		GSM		Interfaces					Audio		Features								Grade		
	LTE FDD category		HSDPA category		(E)GPRS multi-slot class		USB 2.0					Analog audio		Network indication								Standard		
	Bands		HSUPA category	Bands		Bands	UART	SDIO (Master)	DDC (I2C)	GPIOs	Digital audio		Antenna supervisor	MIMO 2x2 / Rx Diversity	Remote SIM Access Profile	Embedded TCP/UDP stack	Embedded HTTP, FTP	FOTA	Dual stack IPv4/IPv6	Professional	Automotive			
MPCI-L200	4	2,4,5 7,17	24 6	1,2,4 5,8	12	Quad	•					•	•	■	■	■	•			•				
MPCI-L201	4	2,4,5 13,17	24 6	2,5			•					•	•		•	•	•	•		•				
MPCI-L210 ¹	4	1,3,5 7,8,20	24 6	1,2 5,8	12	Quad	•					•	•		■	■	■	•		•				
MPCI-L220 ²	4	1,3,5 6,8,19	24 6	1,6 8,19			•					•	•		•	•	•	•		•				
MPCI-L280	4	1,3,5 7,8,28	24 6	1,2 5,8	12	Quad	•					•	•		•	•	•	•		•				

• = supported by all product versions

■ = supported by all product versions except versions "00", "60", "63"

Table 1: MPCI-L2 series main features summary

¹ MPCI-L210-63S product version does not support LTE band 20

² MPCI-L220-62S product version does not support UMTS Radio Access Technology

1.3 Block diagram

As described in [Figure 1](#), each MPCI-L2 series module integrates one TOBY-L2 series module, which represents the core of the device, providing the related LTE/3G/2G modem and processing functionalities. Additional signal conditioning circuitry is implemented for PCI Express Mini Card compliance, and two U.FL connectors are available for easy antennas integration.

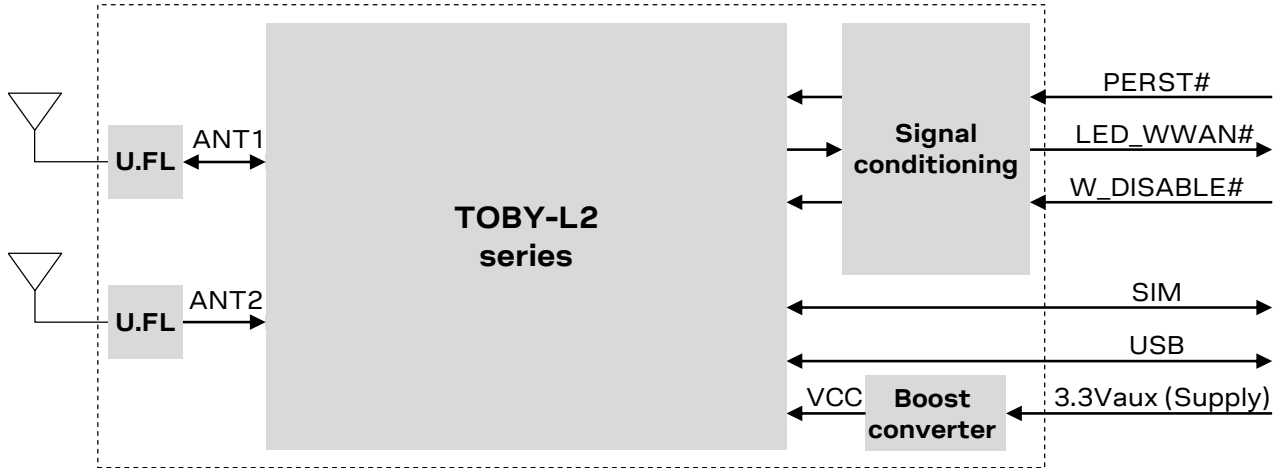


Figure 1: MPCI-L2 series block diagram

1.4 Product description

MPCI-L2 series modules provide 4G LTE, 3G WCDMA/DC-HSPA+, 2G GSM/(E)GPRS multi-mode technology:

- MPCI-L200 and MPCI-L201 are mainly designed for operation in America
- MPCI-L210 is mainly designed for operation in Europe, Asia, and other countries
- MPCI-L220 is mainly designed for operation in Japan
- MPCI-L280 is mainly designed for operation in south-east Asia and Oceania

4G LTE	3G UMTS/HSDPA/HSUPA	2G GSM/GPRS/EDGE
3GPP Release 9	3GPP Release 8	3GPP Release 8
Long Term Evolution (LTE)	Dual-Cell HS Packet Access (DC-HSPA+)	Enhanced Data rate GSM Evolution (EDGE)
Evolved UTRA (E-UTRA)	UMTS Terrestrial Radio Access (UTRA)	GSM EGPRS Radio Access (GERA)
Frequency Division Duplex (FDD)	Frequency Division Duplex (FDD)	Time Division Multiple Access (TDMA)
DL Multi-Input Multi-Output (MIMO) 2x2	DL Rx diversity	DL Advanced Rx Performance Phase 1
Band support ³ :	Band support:	Band support:
• MPCI-L200: • Band 17 (700 MHz) • Band 5 (850 MHz) • Band 4 (1700 MHz) • Band 2 (1900 MHz) • Band 7 (2600 MHz) • MPCI-L201: • Band 17 (700 MHz) • Band 13 (750 MHz) • Band 5 (850 MHz) • Band 4 (1700 MHz) • Band 2 (1900 MHz)	• MPCI-L200: • Band 5 (850 MHz) • Band 8 (900 MHz) • Band 4 (AWS, i.e. 1700 MHz) • Band 2 (1900 MHz) • Band 1 (2100 MHz) • MPCI-L201: • Band 5 (850 MHz) • Band 2 (1900 MHz)	• MPCI-L200: • GSM 850 MHz • E-GSM 900 MHz • DCS 1800 MHz • PCS 1900 MHz

³ MPCI-L2 series modules support all the E-UTRA channel bandwidths for each operating band as per 3GPP TS 36.521-1 [11].

4G LTE	3G UMTS/HSDPA/HSUPA	2G GSM/GPRS/EDGE
- MPCI-L210 ⁴: - Band 20 (800 MHz) - Band 5 (850 MHz) - Band 8 (900 MHz) - Band 3 (1800 MHz) - Band 1 (2100 MHz) - Band 7 (2600 MHz) - MPCI-L220: - Band 19 (850 MHz) - Band 6 (850 MHz) - Band 5 (850 MHz) - Band 8 (900 MHz) - Band 3 (1800 MHz) - Band 1 (2100 MHz) - MPCI-L280: - Band 28 (750 MHz) - Band 5 (850 MHz) - Band 8 (900 MHz) - Band 3 (1800 MHz) - Band 1 (2100 MHz) - Band 7 (2600 MHz)	- MPCI-L210: - Band 5 (850 MHz) - Band 8 (900 MHz) - Band 2 (1900 MHz) - Band 1 (2100 MHz) - MPCI-L220 ⁵: - Band 19 (850 MHz) - Band 6 (850 MHz) - Band 8 (900 MHz) - Band 1 (2100 MHz) - MPCI-L280: - Band 5 (850 MHz) - Band 8 (900 MHz) - Band 2 (1900 MHz) - Band 1 (2100 MHz)	- MPCI-L210: - GSM 850 MHz - E-GSM 900 MHz - DCS 1800 MHz - PCS 1900 MHz - MPCI-L280: - GSM 850 MHz - E-GSM 900 MHz - DCS 1800 MHz - PCS 1900 MHz
LTE Power Class Class 3 (23 dBm) for LTE mode	WCDMA/HSDPA/HSUPA Power Class Class 3 (24 dBm) for UMTS/HSDPA/HSUPA mode	GSM/GPRS (GMSK) Power Class - Class 4 (33 dBm) in GSM/E-GSM band - Class 1 (30 dBm) in DCS/PCS band EDGE (8-PSK) Power Class - Class E2 (27 dBm) in GSM/E-GSM band - Class E2 (26 dBm) in DCS/PCS band
Data rate LTE category 4: up to 150 Mb/s DL, 50 Mb/s UL	Data rate - MPCI-L200, MPCI-L201: - HSDPA cat.14, up to 21 Mb/s DL ⁶ - HSUPA cat.6, up to 5.6 Mb/s UL - MPCI-L210, MPCI-L220, MPCI-L280: - HSDPA cat.24, up to 42 Mb/s DL - HSUPA cat.6, up to 5.6 Mb/s UL	Data rate ⁷ - GPRS multi-slot class 12 ⁸, CS1-CS4, up to 85.6 kb/s DL/UL - EDGE multi-slot class 12 ⁸, MCS1-MCS9 up to 236.8 kb/s DL/UL

Table 2: MPCI-L2 series LTE, 3G and 2G characteristics

1.5 AT command support

The MPCI-L2 series modules support AT commands according to 3GPP standards TS 27.007 [1], 27.005 [2] and the u-blox AT command extension.

 For the complete list of all the supported AT commands and their syntax, see the u-blox AT commands manual [3].

RIL (Radio Interface Layer) software for Android is available for MPCI-L2 series modules free of charge. See the Android RIL source code application note [4] for the supported software deliveries and more information.

⁴ MPCI-L210-63S product version does not support LTE band 20

⁵ MPCI-L220-62S product version does not support 3G Radio Access Technology

⁶ HSDPA category 24 capable

⁷ GPRS/EDGE multi-slot class determines the number of timeslots available for upload and download and thus the speed at which data can be transmitted and received, with higher classes typically allowing faster data transfer rates.

⁸ GPRS/EDGE multi-slot class 12 implies a maximum of 4 slots in Down-Link and 4 slots in Up-Link, with 5 slots in total.

1.6 Supported features

Table 3 lists some of the main features supported by MPCI-L2 series modules. For more details, see the TOBY-L2 / MPCI-L2 system integration manual [5] and u-blox AT commands manual [3].

Feature	Description
Network Indication	LED_WWAN# signal provides the Wireless Wide Area Network status indication as specified by the PCI Express Mini Card electromechanical specification [9].
Embedded TCP and UDP stack ⁹	Embedded TCP/IP and UDP/IP stack including the Direct Link mode for TCP and UDP sockets. Sockets can be set in Direct Link mode to establish a transparent end to end communication with an already connected TCP or UDP socket via serial interface.
FTP ⁹ , FTPS ¹⁰	File Transfer Protocol as well as Secure File Transfer Protocol (SSL encryption of FTP control channel) functionalities are supported via AT commands.
HTTP ⁹ , HTTPS ¹⁰	Hyper-Text Transfer Protocol as well as Secure Hyper-Text Transfer Protocol (SSL encryption) functionalities are supported via AT commands.
Embedded TLS 1.2 ¹⁰	With the support of X.509 certificates, Embedded TLS 1.2 provides server and client authentication, data encryption, data signature and enables TCP/IP applications communicate over a secured and trusted connection. The feature can be configured and enabled by +USECMNG and +USECPRF AT commands.
DNS ⁹	Support for DNS functionality.
Dual stack IPv4/IPv6	Both Internet Protocol version 4 and Internet Protocol version 6 are supported in parallel.
BIP ¹¹	Bearer Independent Protocol for Over-the-Air SIM provisioning. The data transfer to/from the SIM uses either an already active PDP context or a new PDP context established with the APN provided by the SIM card.
Multiple PDP contexts	Up to 8 PDP contexts can be activated, and multi secondary PDP contexts be associated to a primary PDP context
SMS via IMS ¹²	Allows SMS via embedded IP Multimedia Subsystem (IMS)
Firmware update Over AT commands (FOAT)	Firmware module upgrade over AT command interface (USB). The feature can be enabled and configured through the +UFWUPD AT command.
Firmware update Over The Air (FOTA) ⁹	Firmware module update over the LTE/3G/2G air interface. The feature can be enabled and configured through the +UFWINSTALL AT command.
LTE DL MIMO 2x2 and 3G DL Rx Diversity	Improved cellular link quality and reliability on all operating bands.
Smart Temperature Supervisor ¹³	Constant monitoring of the module board temperature: - Warning notification when the temperature approaches an upper or lower predefined threshold - Shutdown notified and forced when the temperature value is outside the specified range (shutdown suspended in case of an emergency call in progress) The Smart Temperature Supervisor feature can be enabled and configured through the +USTS AT command.  The sensor measures board temperature, which can differ from ambient temperature.
Remote SIM Access Profile (SAP) ¹⁴	Allows access and use of a remote (U)SIM card instead of the local SIM card directly connected to the module (U)SIM interface. The module acts as an SAP Client establishing a connection and performing data exchange to a SAP Server directly connected to the remote SIM. The modules provide a dedicated USB SAP channel and a dedicated multiplexer SAP channel over UART for communication with the remote (U)SIM card. The feature can be configured and enabled by +USAPMODE and +USAPIND AT commands.

⁹ Not supported by “00”, “60” and “63” product versions

¹⁰ Not supported by “00”, “01”, “60”, “63” and MPCI-L201-02S product versions.

¹¹ Not supported by “00”, “60”, “63” product versions. Not supported by MPCI-L201-01S and MPCI-L201-02S-00 product versions in AT&T configuration.

¹² Not supported by “00”, “03”, “60”, “62”, “63”, MPCI-L200-02S, MPCI-L210-02S, MPCI-L220-02S and MPCI-L280-02S product versions.

¹³ Not supported by “00”, “01”, “60” and “63” product versions.

¹⁴ Not supported by “00”, “01”, “02”, “60”, “62” and “63” product versions

Feature	Description
Power saving	The power saving configuration is by default disabled, but it can be configured using the +UPSV AT command. When power saving is enabled, the module automatically enters the low power idle-mode whenever possible, reducing current consumption. During idle-mode, the module processor core runs with the internal RTC 32 kHz reference clock.
Fast Dormancy	The Fast Dormancy feature, defined in 3GPP Rel.8, allows reduction of current consumption and network utilization during periods of data inactivity. It can be activated by +UFDAC and +UDCONF=61 AT commands.
Radio Policy Manager (RPM) ¹⁵	The Radio Policy Manager (RPM) feature provides a more efficient access to the network, controlling the number of network accesses per service type over a fixed amount of time. For more details on the RPM feature see the GSMA IoT device connection efficiency guidelines [12] . The feature can be enabled through the +URPM and +URPMCONF AT commands.

Table 3: Some of the main features supported by MPCI-L2 series modules

¹⁵ Not supported by product versions "00", "02", "60", "62", "63" of MPCI-L2x0 modules, not supported by product version "01" of MPCI-L201 modules, and not supported by product versions MPCI-L2x0-03S-00 and MPCI-L201-02S-00

2 Interfaces

2.1 Module supply input

MPCI-L2 series modules must be supplied through the 3.3Vaux pins by a DC power supply. The voltage must be stable, because during this operation the current drawn from 3.3Vaux can vary significantly, based on the power consumption profile of the LTE/3G/2G systems (see the TOBY-L2 / MPCI-L2 system integration manual [\[5\]](#)).

2.2 Antenna RF interfaces

The modules have two RF interfaces over two standard U.FL connectors (Hirose U.FL-R-SMT) with a characteristic impedance of 50 Ω . The primary RF port (**ANT1**) supports both Tx and Rx, providing the main antenna interface, while the secondary RF port (**ANT2**) supports Rx only for the LTE MIMO 2x2 and 3G Rx diversity configurations.

2.3 System functions

2.3.1 Module power-on

MPCI-L2 series can be switched on by:

- Rising edge on the **3.3Vaux** pin to a valid voltage for module supply, i.e. applying module supply.

2.3.2 Module power-off

MPCI-L2 series can be properly switched off by:

- Sending the AT+CFUN=127 command (see the u-blox AT commands manual [\[3\]](#)) to configure the module in the halt mode, and then removing the **3.3Vaux** supply. In this way, the current parameter settings are saved in the module's non-volatile memory and a proper network detach is performed.

An abrupt under-voltage shutdown occurs on MPCI-L2 modules when the **3.3Vaux** supply is suddenly removed. If this is done without previously configuring the module in the halt mode, the storage of the current parameter settings in the module's non-volatile memory and the proper network detach are not performed.

An over-temperature or an under-temperature shutdown occurs on MPCI-L2 modules when the temperature measured within the cellular module reaches the dangerous area, if the optional Smart Temperature Supervisor feature (not supported by the "00", "01", "60" and "63" product versions) is enabled and configured by the AT+USTS command. For more details, see the TOBY-L2 / MPCI-L2 system integration manual [\[5\]](#) and the u-blox AT commands manual [\[3\]](#).

2.3.3 Module reset

MPCI-L2 series can be reset (rebooted) by:

- AT+CFUN command (see the u-blox AT commands manual [\[3\]](#)).
- AT+CPWROFF command (see the u-blox AT commands manual [\[3\]](#)): this behavior differs than TOBY-L2 modules, where MPCI-L2 series modules will boot back up, rather than remain powered off, due to the MPCI-L2 series module's internal configuration.

In both cases, an "internal" or "software" reset of the module is executed: the current parameter settings are saved in the module's non-volatile memory and a proper network detach is performed.

An abrupt "external" or "hardware" reset of the module occurs when a low level is applied on the **PERST#** pin (normally set high by an internal pull-up) for a valid time period (see section [4.2.5](#)). The

current parameter settings are not saved in the module's non-volatile memory and a proper network detach is not performed. **PERST#** line should be driven by open drain, open collector or contact switch.

2.4 SIM interface

A SIM card interface is provided on the **UIM_PWR**, **UIM_DATA**, **UIM_CLK**, **UIM_RESET** pins of the system connector as well as on a micro-SIM (3FF) card holder solderable on the back side of the board: the high-speed SIM/ME interface is implemented as well as the automatic detection of the required SIM supporting voltage.

Both 1.8 V and 3 V SIM types are supported (1.8 V and 3 V ME). Activation and deactivation with automatic voltage switch from 1.8 V to 3 V is implemented, according to ISO-IEC 7816-3 specifications. The SIM driver supports the PPS procedure for baud-rate selection, according to the values proposed by the SIM card/chip.

2.5 USB interface

MPCI-L2 series modules include a high-speed USB 2.0 compliant interface with maximum 480 Mb/s data rate, representing the interface for any communication with an external host application processor. The module itself acts as a USB device and can be connected to any USB host equipped with compatible drivers.

The **USB_D+** / **USB_D-** lines carry the USB serial bus data and signaling, providing all the functionalities for the bus attachment, configuration, enumeration, suspension or remote wakeup according to the Universal Serial Bus revision 2.0 specification [6].

MPCI-L2 series modules provide by default the following set of USB functions:

- CDC-ACM modem: AT commands interface is available over this modem COM port
- RNDIS network adapter: Ethernet-over-USB connection is available over this network adapter

The USB of MPC-L2 series modules can be configured by the AT+UUSBCONF command to select different sets of USB functions available in a mutually exclusive way. The configured USB profile can thus consist of a specific set of functions with various capabilities and purposes, such as:

- CDC-ACM for AT commands and data
- CDC-ACM for remote SIM Access Profile (SAP)¹⁶
- CDC-ACM for diagnostic
- RNDIS for Ethernet-over-USB
- CDC-ECM for Ethernet-over-USB

For more details regarding USB configurations and capabilities, see the TOBY-L2 / MPC-L2 system integration manual [5] and the u-blox AT commands manual [3], +UUSBCONF AT command.

USB drivers are available for the following operating system platforms:

- Windows Vista
- Windows 7
- Windows 8
- Windows 8.1
- Windows 10
- Windows Embedded CE 6.0¹⁷
- Windows Embedded Compact 7¹⁷
- Windows Embedded Compact 2013¹⁷

MPCI-L2 series modules are compatible with standard Linux/Android USB kernel drivers.

¹⁶ Not supported by "00", "01", "02", "60", "62" and "63" product versions

¹⁷ For more details see the Windows Embedded OS USB driver installation application note [7]

2.6 W_DISABLE#

MPCI-L2 series includes the **W_DISABLE#** active-low input signal to disable the radio operations as specified by the PCI Express Mini Card electromechanical specification [\[9\]](#).

2.7 LED_WWAN#

MPCI-L2 series includes the **LED_WWAN#** active-low open drain output to provide the Wireless Wide Area Network status indication as specified by the PCI Express Mini Card electromechanical specification [\[9\]](#).

3 Pin definition

3.1 Pin assignment

No	PCI Express Mini Card E.M. Spec. Rev. 2.0	MPCI-L2	Voltage domain	I/O	Description	Remarks
1	WAKE#	NC		N/A		Internally not connected
2	3.3Vaux	3.3Vaux	3.3Vaux	I	MPCI supply input	Connect to external 3.3 V supply. See 4.2.2 for detailed electrical specs.
3	COEX1	NC		N/A		Internally not connected
4	GND	GND	GND	N/A	Ground	Connect to ground
5	COEX2	NC		N/A		Internally not connected
6	1.5V	NC		N/A		Internally not connected
7	CLKREQ#	NC		N/A		Internally not connected
8	UIM_PWR	UIM_PWR	SIM	O	SIM supply output	1.8 V or 3.0 V output according to the SIM card/chip voltage type. See 4.2.9 for detailed electrical specs.
9	GND	GND	GND	N/A	Ground	Connect to ground
10	UIM_DATA	UIM_DATA	SIM	I/O	SIM data input/output	Internal 4.7 kΩ pull-up to UIM_PWR. See 4.2.9 for detailed electrical specs.
11	REFCLK-	NC		N/A		Internally not connected
12	UIM_CLK	UIM_CLK	SIM	O	SIM clock output	3.25 MHz output for SIM card/chip. See 4.2.9 for detailed electrical specs.
13	REFCLK+	NC		N/A		Internally not connected
14	UIM_RESET	UIM_RESET	SIM	O	SIM reset output	Reset output for SIM card/chip. See 4.2.9 for detailed electrical specs.
15	GND	GND	GND	N/A	Ground	Connect to ground
16	UIM_SPU	NC		N/A		Internally not connected
17	UIM_IC_DM	NC		N/A		Internally not connected
18	GND	GND	GND	N/A	Ground	Connect to ground
19	UIM_IC_DP	NC		N/A		Internally not connected
20	W_DISABLE1#	W_DISABLE#		I	Wireless disable input	Internal 22 kΩ pull-up to 3.3Vaux. See 4.2.6 for detailed electrical specs.
21	GND	GND	GND	N/A	Ground	Connect to ground
22	PERST#	PERST#		I	MPCI reset input	Internal 45 kΩ active pull-up to 3.3 V. See 4.2.5 for detailed electrical specs.
23	PERn0	NC		N/A		Internally not connected
24	3.3Vaux	3.3Vaux	3.3Vaux	I	MPCI supply input	Connect to external 3.3 V supply. See 4.2.2 for detailed electrical specs.
25	PERp0	NC		N/A		Internally not connected
26	GND	GND	GND	N/A	Ground	Connect to ground
27	GND	GND	GND	N/A		Connect to ground
28	1.5V	NC		N/A		Internally not connected
29	GND	GND	GND	N/A	Ground	Connect to ground
30	SMB_CLK	NC		N/A		Internally not connected
31	PETn0	NC		N/A		Internally not connected
32	SMB_DATA	NC		N/A		Internally not connected
33	PETp0	NC		N/A		Internally not connected
34	GND	GND	GND	N/A	Ground	Connect to ground

No	PCI Express Mini Card E.M. Spec. Rev. 2.0	MPCI-L2	Voltage domain	I/O	Description	Remarks
35	GND	GND	GND	N/A	Ground	Connect to ground
36	USB_D-	USB_D-	USB	I/O	USB Data Line D-	90 Ω nominal differential impedance. Pull-up, pull-down and series resistors as required by USB 2.0 specifications [6] are part of the USB pin driver and need not be provided externally. See 4.2.8 for detailed electrical specs.
37	GND	GND	GND	N/A	Ground	Connect to ground
38	USB_D+	USB_D+	USB	I/O	USB Data Line D+	90 Ω nominal differential impedance. Pull-up, pull-down and series resistors as required by USB 2.0 specifications [6] are part of the USB pin driver and need not be provided externally. See 4.2.8 for detailed electrical specs.
39	3.3Vaux	3.3Vaux	3.3Vaux	I	MPCI supply input	Connect to external 3.3 V supply. See 4.2.2 for detailed electrical specs.
40	GND	GND	GND	N/A	Ground	Connect to ground
41	3.3Vaux	3.3Vaux	3.3Vaux	I	MPCI supply input	Connect to external 3.3 V supply. See 4.2.2 for detailed electrical specs.
42	LED_WWAN#	LED_WWAN#		O	LED indicator output	Open drain active low output. See 4.2.7 for detailed electrical specs.
43	GND	GND	GND	N/A	Ground	Connect to ground
44	LED_WLAN#	NC		N/A		Internally not connected
45	Reserved	NC		N/A		Internally not connected
46	LED_WPAN#	NC		N/A		Internally not connected
47	Reserved	NC		N/A		Internally not connected
48	1.5V	NC		N/A		Internally not connected
49	Reserved	NC		N/A		Internally not connected
50	GND	GND	GND	N/A	Ground	Connect to ground
51	W_DISABLE2#	NC		N/A		Internally not connected
52	3.3Vaux	3.3Vaux	3.3Vaux	I	MPCI supply input	Connect to external 3.3 V supply. See 4.2.2 for detailed electrical specs.

Table 4: MPCI-L2 series system connector pin assignment

4 Electrical specifications

-  Stressing the device above one or more of the ratings listed in the Absolute Maximum Rating section may cause permanent damage. These are stress ratings only. Operating the module at these or at any conditions other than those specified in the Operating Conditions sections (chapter 4.1) of the specification should be avoided. Exposure to Absolute Maximum Rating conditions for extended periods may affect device reliability.
-  Electrical characteristics are defined according to verification on a representative number of samples or according to simulation.
-  Application information is advisory only and does not form part of the specification.

4.1 Absolute maximum rating

-  Limiting values given below are in accordance with Absolute Maximum Rating System (IEC 134).

Symbol	Description	Condition	Min.	Max.	Unit
3.3Vaux	Module supply voltage	Input DC voltage at 3.3Vaux pins	-0.3	6.3	V
USB	USB D+/D- pins	Input DC voltage at USB interface pins		3.6	V
SIM	SIM interface	Input DC voltage at SIM interface pins	-0.3	3.6	V
PERST#	MPCI reset input	Input DC voltage at PERST# input pin	-0.3	5.0	V
W_DISABLE#	Wireless disable input	Input DC voltage at W_DISABLE# input pin	-0.3	3.6	V
LED_WWAN#	LED indicator output	Input DC voltage at LED_WWAN# output pin	-0.3	6.0	V
Rho_ANT	Antenna ruggedness	Output RF load mismatch ruggedness at ANT1 / ANT2		10:1	VSWR
Tstg	Storage temperature		-40	85	°C

Table 5: Absolute maximum ratings

-  The product is not protected against overvoltage or reversed voltages. If necessary, voltage spikes exceeding the power supply voltage specification, given in table above, must be limited to values within the specified boundaries by using appropriate protection devices.

4.1.1 Maximum ESD

Parameter	Min	Typ	Max	Unit	Remarks
ESD sensitivity for all pins except ANT1 / ANT2			1000	V	Human Body Model according to JESD22-A114
ESD sensitivity for ANT1 / ANT2			1000	V	Human Body Model according to JESD22-A114
ESD immunity for ANT1 / ANT2			4000	V	Contact Discharge according to IEC 61000-4-2
			8000	V	Air Discharge according to IEC 61000-4-2

Table 6: Maximum ESD ratings

-  u-blox cellular modules are Electrostatic Sensitive Devices and require special precautions when handling. See section 7.2 for ESD handling instructions.

4.2 Operating conditions

 Unless otherwise indicated, all operating condition specifications are at an ambient temperature of +25 °C.

 Operation beyond the operating conditions is not recommended and extended exposure beyond them may affect device reliability.

4.2.1 Operating temperature range

Parameter	Min.	Typical	Max.	Unit	Remarks
Normal operating temperature	-20	+25	+65	°C	Operating within 3GPP / ETSI specifications
Extended operating temperature	-40		+85	°C	Operating with possible slight deviation in RF performance outside normal operating range

Table 7: Environmental conditions

4.2.2 Supply/power pins

Symbol	Parameter	Min.	Typical	Max.	Unit
3.3Vaux	Module supply operating input voltage ¹⁸	3.00	3.30	3.60	V

Table 8: Input characteristics of Supply/Power pins

4.2.3 Current consumption

Mode	Condition	Tx power	Min	Typ	Max	Unit
Idle-Mode (Power Saving enabled by AT+UPSV, module in low power idle-mode, equivalent to +CFUN=4 or +COPS=2)	Averaged current value over a 100-ms period, USB connected and suspended			1.8		mA
Cyclic Idle/Active-Mode (Power Saving enabled by AT+UPSV, Module registered with network)	Averaged current value over a 10-minute period, USB interface suspended			3.9		mA
Active-Mode (Power Saving disabled by AT+UPSV, Module registered with network)	Averaged current value over a 10-minute period, USB interface not suspended			59		mA
2G Connected Mode (Tx / Rx call enabled)	Pulse current during a 1-slot GMSK Tx burst, 850/900 MHz bands	Maximum		2.6		A
	Averaged current value over a 10-second period, 2G GMSK call, 1 Tx + 1 Rx slot, 850/900 MHz	Maximum		380		mA
	Averaged current value over a 10-second period, 2G GMSK call, 1 Tx + 1 Rx slot, 1800/1900 MHz	Maximum		295		mA
3G Connected Mode (Tx / Rx call enabled)	Averaged current value over a 10-second period, 3G call with Low data rate	Minimum		245		mA
		0 dBm		265		mA
		12 dBm		365		mA
		18 dBm		505		mA
	Averaged current value over a 10-second period, 3G call with Maximum data rate	Maximum		790		mA

¹⁸ The input voltage has to be above the minimum limit to switch on the module, and to avoid possible switch-off of the module.

Mode	Condition	Tx power	Min	Typ	Max	Unit
LTE Connected Mode (Tx/Rx call enabled)	Averaged current value over a 10-second period, LTE call with Low data rate	Minimum		395		mA
		0 dBm		415		mA
		12 dBm		520		mA
		18 dBm		650		mA
		Maximum		815		mA
	Averaged current value over a 10-second period, LTE call with Maximum data rate	Maximum		880		mA

Table 9: Module 3.3Vaux supply current consumption

4.2.4 LTE/3G/2G RF characteristics

MPCI-L2 series LTE/3G/2G RF characteristics are specified in the TOBY-L2 series data sheet [\[10\]](#).

4.2.5 PERST# pin

Pin Name	Parameter	Min.	Typical	Max.	Unit	Remarks
PERST#	Low-level input	0.00		1.10	V	
	High-level input	2.60		3.70	V	
	L-level input current		-82		μA	
	Pull-up resistance	35	45		kΩ	Internal active pull-up to 3.3 V
	PERST# low time	2.1			s	Low time to reset the module

Table 10: PERST# pin characteristics

4.2.6 W_DISABLE# pin

Pin Name	Parameter	Min.	Typical	Max.	Unit	Remarks
W_DISABLE#	Low-level input	0.00		0.80	V	
	High-level input	2.00		3.60	V	
	Pull-up resistance		22		kΩ	Internal pull-up to 3.3Vaux

Table 11: W_DISABLE# pin characteristics

4.2.7 LED_WWAN# pin

Pin Name	Parameter	Min.	Typical	Max.	Unit	Remarks
LED_WWAN#	Low-level output		0.00	0.40	V	Open-drain output Max value at IOL = +9.0 mA

Table 12: LED_WWAN# pin characteristics

4.2.8 USB pins

USB data lines (**USB_D+** / **USB_D-**) are compliant to the USB 2.0 high-speed specification. The values in [Table 13](#) are for information only. See the USB 2.0 specifications [\[6\]](#) for detailed electrical characteristics.

Parameter	Min.	Typical	Max.	Unit	Remarks
High-speed squelch detection threshold (input differential signal amplitude)	100		150	mV	
High speed disconnect detection threshold (input differential signal amplitude)	525		625	mV	
High-speed data signaling input common mode voltage range	-50		500	mV	
High-speed idle output level	-10		10	mV	
High-speed data signaling output high level	360		440	mV	
High-speed data signaling output low level	-10		10	mV	
Chirp J level (output differential voltage)	700		1100	mV	
Chirp K level (output differential voltage)	-900		-500	mV	

Table 13: USB pins characteristics

4.2.9 SIM pins

The SIM pins are a dedicated interface to the external SIM card/chip. The electrical characteristics fulfill regulatory specification requirements. The values in [Table 14](#) are for information only.

Parameter	Min.	Typical	Max.	Unit	Remarks
UIM_PWR supply output	1.76	1.80	1.85	V	1.8 V SIM type
	2.84	2.90	2.94	V	3.0 V SIM type
Low-level input	-0.30		0.63	V	1.8 V SIM type
	-0.30		0.80	V	3.0 V SIM type
High-level input	1.17		2.10	V	1.8 V SIM type
	2.00		3.30	V	3.0 V SIM type
Low-level output		0.00	0.45	V	1.8 V SIM type, Max value at $I_{OL} = +2.0$ mA
		0.00	0.40	V	3.0 V SIM type, Max value at $I_{OL} = +2.0$ mA
High-level output	1.35	1.80		V	1.8 V SIM type, Min value at $I_{OH} = -2.0$ mA
	2.60	2.90		V	3.0 V SIM type, Min value at $I_{OH} = -2.0$ mA
Input / Output leakage current	-500		500	nA	0 V < V_{IN} < 0.63 V or 1.17 V < V_{IN} < 2.10 V 0 V < V_{IN} < 0.80 V or 2.00 V < V_{IN} < 3.30 V
Clock frequency on UIM_CLK		3.25		MHz	
Internal pull-up on UIM_DATA		4.7		k Ω	Internal pull-up to UIM_PWR supply

Table 14: SIM pins characteristics

5 Mechanical specifications

MPCI-L2 series modules are fully compliant to the 52-pin PCI Express Full-Mini Card Type F2 form factor, with top-side and bottom-side keep-out areas, with 50.95 mm nominal length, 30 mm nominal width and all the other dimensions as defined by the PCI Express Mini Card electromechanical specification [9] except for the card thickness (nominal value is 3.7 mm), as described in Figure 2. MPCI-L2 series modules weight is about 9.7 g.

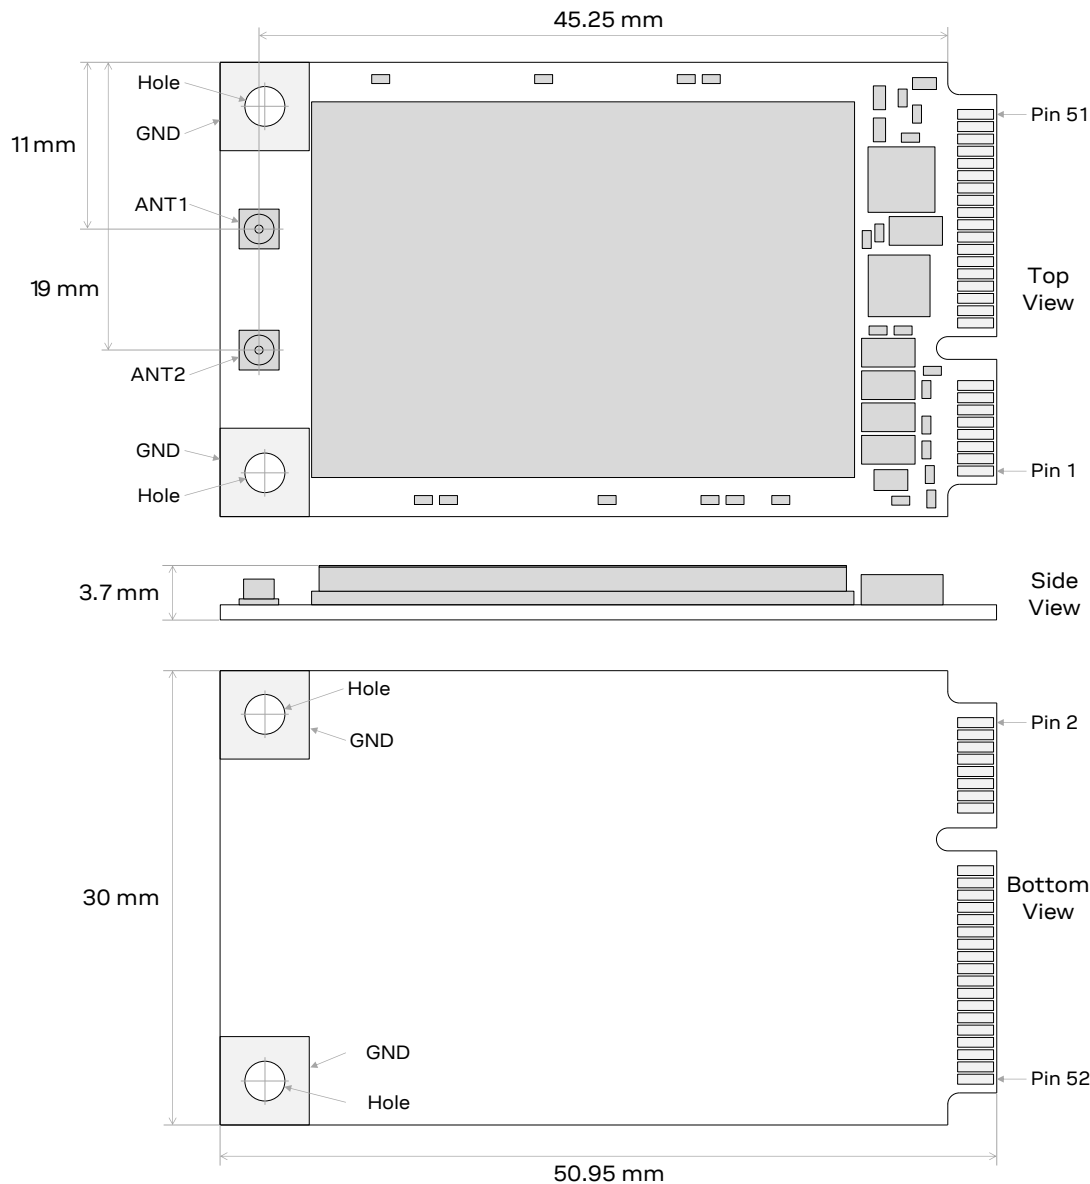


Figure 2: MPCI-L2 series mechanical dimensions (top, side and bottom views)

For further details regarding mechanical specifications, see the PCI Express Mini Card electromechanical specification [9].

6 Qualification and approvals

6.1 Reliability tests

Tests for product family qualifications according to ISO 16750 “Road vehicles - Environmental conditions and testing for electrical and electronic equipment”, and appropriate standards.

6.2 Approvals

MPCI-L2 series modules comply with the Directive 2011/65/EU of the European Parliament and the Council on the Restriction of Use of certain Hazardous Substances in Electrical and Electronic Equipment (EU RoHS 2) and its amendment Directive (EU) 2015/863 (EU RoHS 3).

MPCI-L2 series modules are RoHS 3 compliant.

No natural rubbers, hygroscopic materials, or materials containing asbestos are employed.

[Table 15](#) summarizes the main Regulatory and Network Operator approvals for the MPCI-L2 modules.

Certification scheme	MPCI-L200	MPCI-L201	MPCI-L210	MPCI-L220	MPCI-L280
CE (Europe)	•		•		•
FCC (United States)	•	•	•		•
FCC identification number	Contains FCC ID XPYTOBYL200	Contains FCC ID XPYTOBYL201	Contains FCC ID XPYTOBYL210		Contains FCC ID XPYTOBYL280
ISED (Canada)	•	•	•		•
ISED certification number	Contains IC 8595A-TOBYL200	Contains IC 8595A-TOBYL201	Contains IC 8595A-TOBYL210		Contains IC 8595A-TOBYL280
ANATEL (Brazil)	•				•
ACMA RCM (Australia)			•		•
NCC (Taiwan)			•		•
GITEKI (Japan)			•	•	
NTT DoCoMo (MNO)				•	
SoftBank (MNO)			•		
Verizon (MNO)		•			
Deutsche Telekom (MNO)			•		

Table 15: MPCI-L2 series main certification approvals summary

 The above listed certifications might not be available for all the different product type numbers. Please contact the u-blox office or sales representative nearest you for the complete list of certification approvals available for the selected ordering number.

7 Product handling

7.1 Packaging

MPCI-L2 modules are delivered as hermetically sealed trays of 16 pieces, 10 trays in 1 package (160 units in total), to enable efficient production, production lot set-up and tear-down. For more information about packaging, see the u-blox package information user guide [\[8\]](#).

Quantities of less than 160 pieces are also available. Contact u-blox for more information.

7.2 ESD precautions

 MPCI-L2 series modules contain highly sensitive electronic circuitry and are Electrostatic Sensitive Devices (ESD). Handling MPCI-L2 series modules without proper ESD protection may destroy or damage them permanently.

MPCI-L2 series modules are Electrostatic Sensitive Devices (ESD) and require special ESD precautions typically applied to ESD sensitive components.

[Table 6](#) reports the maximum ESD ratings of the MPCI-L2 series modules.

Proper ESD handling and packaging procedures must be applied throughout the processing, handling and operation of any application that incorporates MPCI-L2 series module.

ESD precautions should be implemented on the application board where the module is mounted, as described in the TOBY-L2 / MPCI-L2 series system integration manual [\[5\]](#).

 Failure to observe these recommendations can result in severe damage to the device!

8 Default settings

Item	AT Settings	Comments
USB interface	Enabled	MPCI-L2 series modules provide by default the following set of USB functions: • CDC-ACM for AT command and data • RNDIS for Ethernet-over-USB connection The USB can be configured by the AT+UUSBCONF command to select different sets of USB functions available in mutually exclusive way, configuring the active USB profile consisting of a specific set of functions with various capabilities and purposes (for more details, see the TOBY-L2 / MPCI-L2 system integration manual [5] and u-blox AT commands manual [3], +UUSBCONF AT command).
Power Saving	AT+UPSV=0	Disabled
Network registration	AT+COPS=0	Self network registration

Table 16: Default settings

9 Labeling and ordering information

9.1 Product labeling

The labels of MPCI-L2 series modules include important product information as described in this section.

Figure 3, Figure 4 and Figure 5 illustrate the label of MPCI-L2 series modules, which is placed on the bottom side of the modules, including: the u-blox logo, Pb-free marking, product type number, production lot, certification numbers and production country.




Figure 3: Label of MPCI-L2 series modules (except MPCI-L210-60S, MPCI-L210-63S and MPCI-L220)




Figure 4: Label of MPCI-L210-60S and MPCI-L210-63S modules



Figure 5: Label of MPCI-L220 modules

9.2 Explanation of codes

Three different product code formats are used. The Product Name is used in documentation such as this data sheet and identifies all u-blox products, independent of packaging and quality grade. The Ordering Code includes options and quality, while the Type Number includes the hardware and firmware versions. [Table 17](#) details these 3 different formats:

Format	Structure
Product Name	MPCI-TGVV
Ordering Code	MPCI-TGVV-MMQ
Type Number	MPCI-TGVV-MMQ-XX

Table 17: Product code formats

[Table 18](#) explains the parts of the product code.

Code	Meaning	Example
PPPP	Form factor	MPCI
TG	Platform (Technology and Generation) - Dominant technology: G: GSM; U: HSUPA; C: CDMA 1xRTT; N: NB-IoT; R: LTE low data rate (Cat 1 and below); L: LTE high data rate (Cat 3 and above) - Generation: 1...9	L2
VV	Variant function set based on the same platform [00...99]	00
MM	Major product version [00...99]	00
Q	Product grade - S = professional - A = automotive	S
XX	Minor product version	Default value is 00

Table 18: Part identification code

9.3 Ordering information

Ordering No.	Product
MPCI-L200-00S	LTE bands 2 / 4 / 5 / 7 / 17, DC-HSPA+ bands 1 / 2 / 4 / 5 / 8, (E)GPRS band 850 / 900 / 1800 / 1900, PCI Express Mini Card module mainly designed for operation in America 51 x 30 x 3.7 mm, 160 pcs/package
MPCI-L200-02S	LTE bands 2 / 4 / 5 / 7 / 17, DC-HSPA+ bands 1 / 2 / 4 / 5 / 8, (E)GPRS band 850 / 900 / 1800 / 1900, PCI Express Mini Card module mainly designed for operation in America, supporting embedded TCP/UDP, HTTP/FTP, TLS/SSL, smart temperature supervisor 51 x 30 x 3.7 mm, 160 pcs/package
MPCI-L200-03S	LTE bands 2 / 4 / 5 / 7 / 17, DC-HSPA+ bands 1 / 2 / 4 / 5 / 8, (E)GPRS band 850 / 900 / 1800 / 1900, PCI Express Mini Card module mainly designed for operation in America, supporting embedded TCP/UDP, HTTP/FTP, TLS/SSL, smart temperature supervisor, SAP 51 x 30 x 3.7 mm, 160 pcs/package
MPCI-L201-01S	LTE bands 2 / 4 / 5 / 13 / 17, DC-HSPA+ bands 1 / 2 / 5 / 8, (E)GPRS band 850 / 900 / 1800 / 1900, PCI Express Mini Card module mainly designed for operation in America, supporting embedded TCP/UDP, HTTP/FTP 51 x 30 x 3.7 mm, 160 pcs/package
MPCI-L201-02S	LTE bands 2 / 4 / 5 / 13 / 17, DC-HSPA+ bands 1 / 2 / 5 / 8, (E)GPRS band 850 / 900 / 1800 / 1900, PCI Express Mini Card module mainly designed for operation in America, supporting embedded TCP/UDP, HTTP/FTP, smart temperature supervisor 51 x 30 x 3.7 mm, 160 pcs/package
MPCI-L210-00S	LTE bands 1 / 3 / 5 / 7 / 8 / 20, DC-HSPA+ bands 1 / 2 / 5 / 8, (E)GPRS band 850 / 900 / 1800 / 1900, PCI Express Mini Card module mainly designed for operation in Europe, Asia and other countries 51 x 30 x 3.7 mm, 160 pcs/package
MPCI-L210-60S	LTE bands 1 / 3 / 5 / 7 / 8 / 20, DC-HSPA+ bands 1 / 2 / 5 / 8, (E)GPRS band 850 / 900 / 1800 / 1900, PCI Express Mini Card module approved by SoftBank Japanese mobile network operator 51 x 30 x 3.7 mm, 160 pcs/package
MPCI-L210-63S	LTE bands 1 / 3 / 5 / 7 / 8, DC-HSPA+ bands 1 / 2 / 5 / 8, (E)GPRS band 850 / 900 / 1800 / 1900, PCI Express Mini Card module approved by SoftBank Japanese mobile network operator 51 x 30 x 3.7 mm, 160 pcs/package
MPCI-L210-02S	LTE bands 1 / 3 / 5 / 7 / 8 / 20, DC-HSPA+ bands 1 / 2 / 5 / 8, (E)GPRS band 850 / 900 / 1800 / 1900, PCI Express Mini Card module mainly designed for operation in Europe, Asia and other countries, supporting embedded TCP/UDP, HTTP/FTP, TLS/SSL, smart temperature supervisor 51 x 30 x 3.7 mm, 160 pcs/package
MPCI-L210-03S	LTE bands 1 / 3 / 5 / 7 / 8 / 20, DC-HSPA+ bands 1 / 2 / 5 / 8, (E)GPRS band 850 / 900 / 1800 / 1900, PCI Express Mini Card module mainly designed for operation in Europe, Asia and other countries, supporting embedded TCP/UDP, HTTP/FTP, TLS/SSL, smart temperature supervisor, SAP 51 x 30 x 3.7 mm, 160 pcs/package
MPCI-L220-02S	LTE bands 1 / 3 / 5 / 6 / 8 / 19, DC-HSPA+ bands 1 / 6 / 8 / 19, PCI Express Mini Card module mainly designed for operation in Japan, supporting embedded TCP/UDP, HTTP/FTP, TLS/SSL, smart temperature supervisor 51 x 30 x 3.7 mm, 160 pcs/package
MPCI-L220-62S	LTE bands 1 / 3 / 5 / 6 / 8 / 19, PCI Express Mini Card module approved by NTT DoCoMo Japanese mobile network operator, supporting embedded TCP/UDP, HTTP/FTP, TLS/SSL, smart temperature supervisor 51 x 30 x 3.7 mm, 160 pcs/package
MPCI-L280-02S	LTE bands 1 / 3 / 5 / 7 / 8 / 28, DC-HSPA+ bands 1 / 2 / 5 / 8, (E)GPRS bands 850 / 900 / 1800 / 1900, PCI Express Mini Card module mainly designed for operation in South East-Asia and Oceania, supporting embedded TCP/UDP, HTTP/FTP, TLS/SSL, smart temperature supervisor 51 x 30 x 3.7 mm, 160 pcs/package
MPCI-L280-03S	LTE bands 1 / 3 / 5 / 7 / 8 / 28, DC-HSPA+ bands 1 / 2 / 5 / 8, (E)GPRS bands 850 / 900 / 1800 / 1900, PCI Express Mini Card module mainly designed for operation in South East-Asia and Oceania, supporting embedded TCP/UDP, HTTP/FTP, TLS/SSL, smart temperature supervisor, SAP 51 x 30 x 3.7 mm, 160 pcs/package

Table 19: Product ordering codes

Appendix

A Glossary

Abbreviation	Definition
ANATEL	Agência Nacional de Telecomunicações (Brazilian National Telecommunications Agency)
AT	Hayes ATtention Command Set
BIP	Bearer Independent Protocol
CBS	Cell Broadcast Services
CDC	Communication Device Class
CDMA	Code-Division Multiple Access
CE	Certification Mark for compliance in the European Union
CLK	Clock
DC	Direct Current
DCE	Data Communication Equipment
DCS	Digital Cellular System
DDC	Display Data Channel
DL	Down Link (Reception)
DTE	Data Terminal Equipment
EDGE	Enhanced Data rates for GSM Evolution
EGPRS	Enhanced General Packet Radio Service
EOL	End of Life
ESD	Electrostatic Discharge
FCC	Federal Communications Commission
FDD	Frequency Division Duplex
FOAT	Firmware (update) Over AT commands
FOTA	Firmware (update) Over-The-Air
FTP	File Transfer Protocol
GERA	GSM EGPRS Radio Access
GITEKI	Gijutsu kijun tekigō shōmei - Japan technical standard conformity certification
GMSK	Gaussian Minimum-Shift Keying modulation
GND	Ground
GNSS	Global Navigation Satellite System
GPRS	General Packet Radio Services
GSM	Global System for Mobile communications
HSDPA	High Speed Downlink Packet Access
HSPA	High Speed Packet Access
HSUPA	High Speed Uplink Packet Access
HTTP	HyperText Transfer Protocol
I/O	Input/Output
I2C	Inter-Integrated Circuit
IC	Integrated Circuit
IEC	International Electrotechnical Commission
IMS	IP Multimedia System
IP	Internet Protocol
ISED	Innovation, Science and Economic Development, formerly known as Industry Canada (IC)

Abbreviation	Definition
ISO	International Organization for Standardization
LED	Light Emitting Diode
LTE	Long-Term Evolution
ME	Mobile Equipment
MIMO	Multiple In Multiple Out
MNO	Mobile Network Operator
N/A	Not Applicable
NCC	National Communications Commission
PCN	Product Change Notification
PPS	Protocol and Parameter Selection
RCM	Regulatory Compliance Mark
RF	Radio Frequency
RIL	Radio Interface Layer
RNDIS	Remote Network Driver Interface Specification
RTC	Real Time Clock
SAP	SIM Access Profile
SDIO	Secure Digital Input Output
SIM	Subscriber Identity Module
SMS	Short Message Service
SMT	Surface-Mount Technology
SSL	Secure Sockets Layer
TCP	Transmission Control Protocol
TCP/IP	Transmission Control Protocol/Internet Protocol
TDMA	Time-Division Multiple Access
TLS	Transport Layer Security
TS	Technical Specification
UART	Universal Asynchronous Receiver/Transmitter
UDP	User Datagram Protocol
UE	User Equipment
UL	Uplink (Transmission)
UMTS	Universal Mobile Telecommunications System
USB	Universal Serial Bus
VSWR	Voltage Standing Wave Ratio
WLAN	Wireless Local Area Network (IEEE 802.11 short range radio technology)
WWAN	Wireless Wide Area Network (GSM / UMTS / LTE cellular radio technology)

Table 20: Explanation of the abbreviations and terms used

Related documentation

- [1] 3GPP TS 27.007 - AT command set for User Equipment (UE)
- [2] 3GPP TS 27.005 - Use of Data Terminal Equipment - Data Circuit terminating Equipment (DTE - DCE) interface for Short Message Service (SMS) and Cell Broadcast Service (CBS)
- [3] u-blox AT commands manual, [UBX-13002752](#)
- [4] u-blox Android RIL source code application note, [UBX-13002041](#)
- [5] u-blox TOBY-L2 / MPCI-L2 series system integration manual, [UBX-13004618](#)
- [6] Universal Serial Bus revision 2.0 specification, <https://www.usb.org/>
- [7] u-blox Windows Embedded OS USB driver installation application note, [UBX-14003263](#)
- [8] u-blox package information user guide, [UBX-14001652](#)
- [9] PCI Express Mini Card Electromechanical Specification, revision 2.0, April 21, 2012
- [10] u-blox TOBY-L2 series data sheet, [UBX-13004573](#)
- [11] 3GPP TS 36.521-1 - Evolved Universal Terrestrial Radio Access; User Equipment conformance specification; radio transmission and reception; part 1: conformance testing
- [12] GSMA TS.34 - IoT device connection efficiency guidelines

 For regular updates to u-blox documentation and to receive product change notifications, register on our homepage (www.u-blox.com).

Revision history

Revision	Date	Name	Status / Comments
R01	20-Dec-2013	jpod / sses	Initial release
R02	14-Oct-2014	lpah / sses	Advance Information document status; Updated module power-on, power-off and reset description; Updated module thickness and improved mechanical description; Minor corrections in PERST#, W_DISABLE#, LED_WWAN# description; Added module current consumption values; Added and updated other minor electrical characteristics
R03	28-Jan-2015	sses	Early Production Information document status
R04	19-Aug-2015	sses	Objective Specification document status; Added description of MPCI-L200-02S, MPCI-L210-02S and MPCI-L210-60S versions.
R05	25-Sep-2015	lpah	Advance Information status
R06	14-Oct-2015	sses	Objective Specification doc status; added description of MPCI-L280-02S version
R07	26-Nov-2015	lpah	Document status changed to Early Production Information
R08	22-Dec-2015	lpah / sses	Added description of MPCI-L201-01S version
R09	31-Mar-2016	sses	Updated features planned for future product versions. Minor other corrections and description improvements.
R10	27-Apr-2016	lpah	Extended document applicability to MPCI-L210-60S-01
R11	15-Jul-2016	sses	Document status reverted to Objective Specification Added description of MPCI-L201-02S version
R12	28-Sep-2016	sses	Document status updated to Advance Information Updated support of some minor features in specific product versions
R13	21-Oct-2016	lpah	Document status updated to Early Production Information. Extended document applicability to MPCI-L220-02S and MPCI-L280-72S
R14	25-Nov-2016	lpah	Extended document applicability to MPCI-L200-00S-01 and removed document applicability to MPCI-L280-72S
R15	19-Apr-2017	lpah	"Disclosure restriction" replaces "Document status" on page 2 and doc footer. Extended document applicability to the MPCI-L200-02S-01, MPCI-L210-02S-01, MPCI-L220-62S and MPCI-L280-02S-01
R16	06-Jun-2017	lpah / sses	Updated MPCI-L201-02S product status to Initial Production

Revision	Date	Name	Status / Comments
R17	23-Jun-2017	lpah / sses	Extended document applicability to the MPCI-L200-03S, MPCI-L210-03S and MPCI-L280-03S
R18	27-Jul-2017	lpah	Updated MPCI-L200-00S-01, MPCI-L210-00S-00 product status to End of Life
R19	03-Jan-2018	lpah / sses	Updated MPCI-L200-02S-01, MPCI-L210-02S-01, MPCI-L280-02S-01 product status to EOL. Updated absolute maximum rating of PERST# pin
R20	27-May-2018	lpah	Updated MPCI-L201-01S product status Packaging information (section 7.1) updated, Reformat
R21	14-Feb-2019	lpah / sses	Extended document applicability to MPCI-L201-02S-01. Updated packaging info (section 7.1) and the number of pieces for package Updated approvals info; minor other corrections and description improvements
R22	12-Apr-2019	lpah / sses	Updated MPCI-L201-02S-01 product status. Updated RoHS statement.
R23	31-Oct-2019	lpah	Updated MPCI-L210-60S-01 product status. Extended document applicability to MPCI-L210-63S product version.
R24	06-Apr-2020	lpah / sses	Updated MPCI-L210-63S product status.
R25	28-Aug-2020	lpah / sses	Extended document applicability to MPCI-L210-03S-01.
R26	09-Dec-2020	lpah / sses	Extended document applicability to MPCI-L201-02S-02.
R27	27-May-2021	lpah / sses	Extended document applicability to MPCI-L200-03S-02, MPCI-L210-03S-02, MPCI-L210-63S-01, MPCI-L220-02S-01, MPCI-L220-62S-01, MPCI-L280-03S-02. Minor other corrections and description improvements.
R28	30-Sep-2021	alos	Extended document applicability to MPCI-L200-03S-03, MPCI-L201-02S-03, MPCI-L210-03S-03, MPCI-L280-03S-03. Minor other description improvements.
R29	02-Dec-2021	sses	Updated MPCI-L201-02S-01, MPCI-L280-03S-00 status to obsolete. Minor editorial changes.

Contact

For complete contact information, visit us at www.u-blox.com.

u-blox Offices

North, Central and South America

u-blox America, Inc.

Phone: +1 703 483 3180

Email: info_us@u-blox.com

Regional Office West Coast:

Phone: +1 408 573 3640

Email: info_us@u-blox.com

Technical Support:

Phone: +1 703 483 3185

Email: support_us@u-blox.com

Headquarters

Europe, Middle East, Africa

u-blox AG

Phone: +41 44 722 74 44

Email: info@u-blox.com

Support: support@u-blox.com

Asia, Australia, Pacific

u-blox Singapore Pte. Ltd.

Phone: +65 6734 3811

Email: info_ap@u-blox.com

Support: support_ap@u-blox.com

Regional Office Australia:

Phone: +61 3 9566 7255

Email: info_au@u-blox.com

Support: support_ap@u-blox.com

Regional Office China (Beijing):

Phone: +86 10 68 133 545

Email: info_cn@u-blox.com

Support: support_cn@u-blox.com

Regional Office China (Chongqing):

Phone: +86 23 6815 1588

Email: info_cn@u-blox.com

Support: support_cn@u-blox.com

Regional Office China (Shanghai):

Phone: +86 21 6090 4832

Email: info_cn@u-blox.com

Support: support_cn@u-blox.com

Regional Office China (Shenzhen):

Phone: +86 755 8627 1083

Email: info_cn@u-blox.com

Support: support_cn@u-blox.com

Regional Office India:

Phone: +91 80 405 092 00

Email: info_in@u-blox.com

Support: support_in@u-blox.com

Regional Office Japan (Osaka):

Phone: +81 6 6941 3660

Email: info_jp@u-blox.com

Support: support_jp@u-blox.com

Regional Office Japan (Tokyo):

Phone: +81 3 5775 3850

Email: info_jp@u-blox.com

Support: support_jp@u-blox.com

Regional Office Korea:

Phone: +82 2 542 0861

Email: info_kr@u-blox.com

Support: support_kr@u-blox.com

Regional Office Taiwan:

Phone: +886 2 2657 1090

Email: info_tw@u-blox.com

Support: support_tw@u-blox.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[u-blox:](#)

[MPCI-L200-03S](#) [MPCI-L201-02S](#) [MPCI-L210-63S](#) [MPCI-L280-03S](#) [MPCI-L220-62S](#)