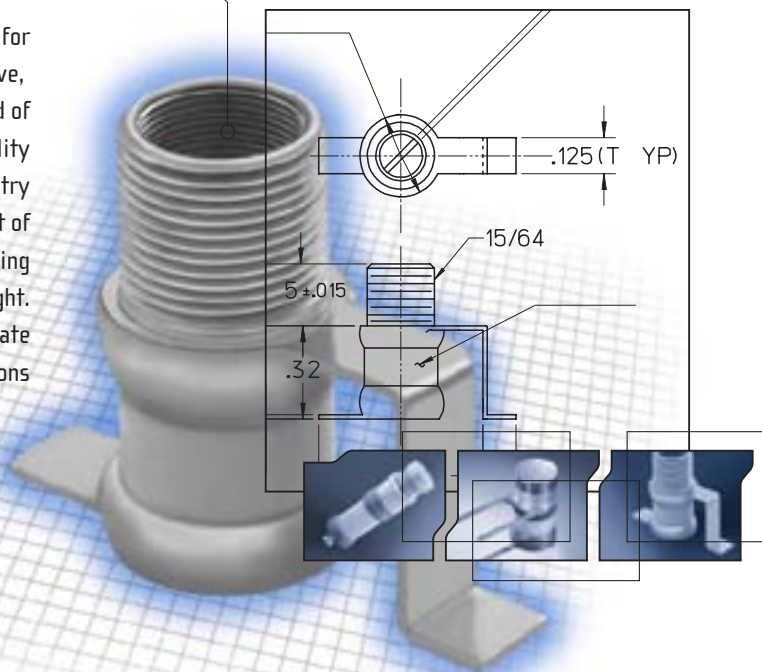


AIR CAPACITORS

Air Capacitors are designed specifically for RF applications, VHF through microwave, and have become the industry standard of excellence. High Q and temperature stability are a result of proper attention to geometry and choice of optimum materials. The heart of this trimmer is the one piece self-locking constant drive mechanism illustrated to the right. This mechanism utilizes transverse slots to create a spring effect between two threaded sections resulting in substantial contact areas which insure uniform torque, high Q and low dynamic tuning noise.



APPLICATIONS

- RF amplifier and oscillators
- Impedance matching
- Interstage coupling
- Filter tuning
- Crystal trimming

CHARACTERISTICS



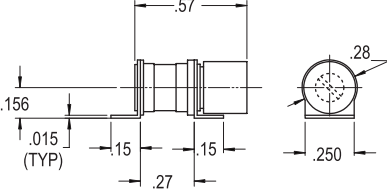

- Working Voltage: 250 VDC (500 VDC Test)
- Long Rotational life
- Insulation resistance: $> 10^6 \text{ M}\Omega$
- Temperature range: -65°C to $+125^\circ\text{C}$
- RoHS Compliant

CAPACITANCE RANGE	SERIES	Q @ 250 MHZ	PAGE
0.35 TO 3.5 pF	5800	> 10000	2
0.5 TO 5 pF	5850	> 7500	2
0.6 TO 6 pF	5700	> 10000	2,3
0.8 TO 10 pF OR 1 TO 10 pF	1500	$> 4000 @ 195\text{MHz}$	2
	5200	> 5000	3
	5750	> 7500	3
	5300	> 2000	4
1 TO 14 pF	5400	> 3000	3,4
1 TO 16 pF	5450	> 3000	4
1 TO 20 pF	5500	> 1500	4
1 TO 30 pF	5600	> 800	4



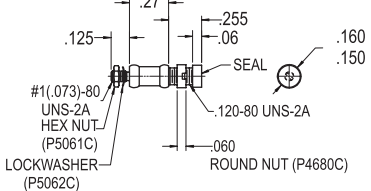
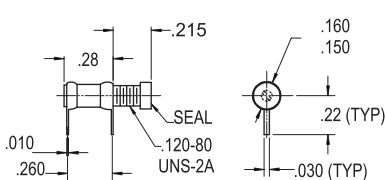
1 TO 10 pF

- Lead-Solderless design
- Capacitance Range: 1.0 to 10.0 pF (>8 turns)
- Working Voltage: 250 VDC (500 VDC Test)
- Torque: 1 to 5.0 oz. In.
- Tuning Tool: 8764
- RoHS Compliant

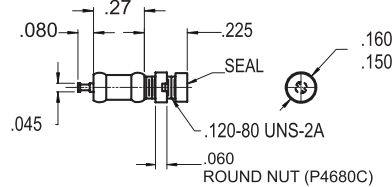

1501 Q @ 195 MHz >4000	
1502 Q @ 195 MHz >4000	
1518 Q @ 195 MHz >4000	
1585 Q @ 195 MHz >4000	

0.35 TO 3.5 pF

- Capacitance Range: .35 to 3.5 pF (>9 turns)
- Working Voltage: 250 VDC (500 VDC Test)
- Torque: .3 to 3 oz. In.
- Tuning Tool: 8766
- RoHS Compliant

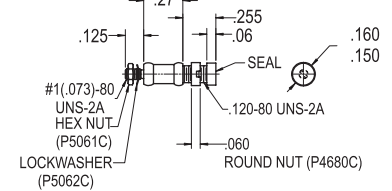
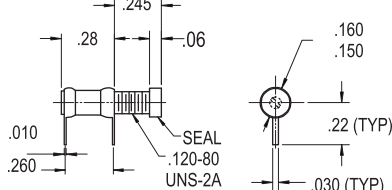
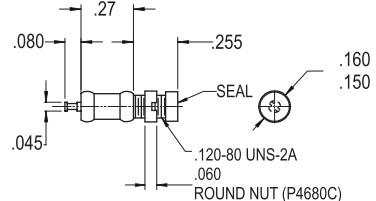

5800 Q @ 100 MHz >10000	
5801 Q @ 100 MHz >10000	

0.35 TO 3.5 pF

5802 Q @ 100 MHz >10000	
8051 (0.6 to 3.5 pF) Q @ 100 MHz >10000	

0.5 TO 5 pF

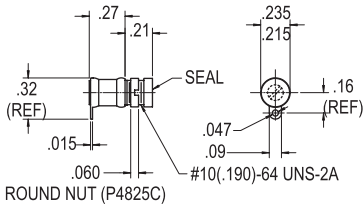
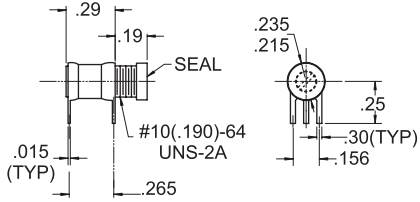


- Capacitance Range: .5 to 5 pF (>12 turns)
- Working Voltage: 250 VDC (500 VDC Test)
- Torque: .3 to 3 oz. In.
- Tuning Tool: 8764
- RoHS Compliant

5850 Q @ 100 MHz >7500	
5851 Q @ 100 MHz >7500	
5852 Q @ 100 MHz >7500	
5853 (0.6 to 5 pF) Q @ 100 MHz >7500	

0.6 TO 6 pF

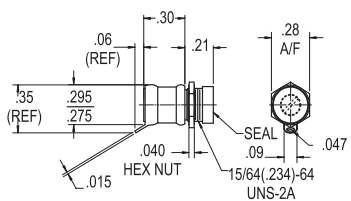
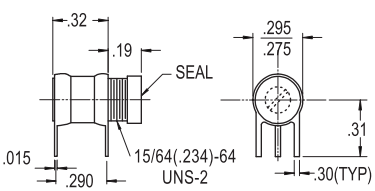

- Capacitance Range: .6 to 6 pF (>7 turns)
- Working Voltage: 250 VDC (500 VDC Test)
- Torque: .4 to 4 oz. In.
- Tuning Tool: 8764
- RoHS Compliant

0.6 TO 6 pF


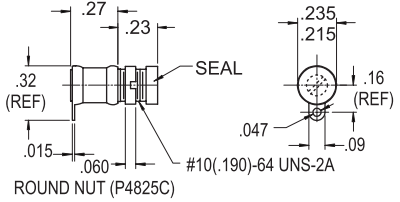
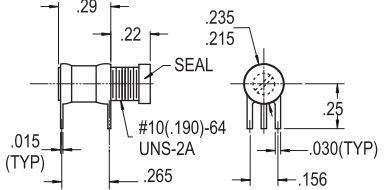
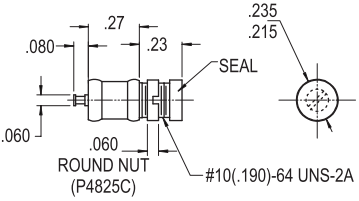

5700 Q @ 100 MHz >10000	
5701 Q @ 100 MHz >10000	
5702 Q @ 100 MHz >10000	
8050 Q @ 100 MHz >10000	

0.8 TO 10 pF

- Capacitance Range: .8 to 10 pF (>6 turns)
- Working Voltage: 250 VDC (500 VDC Test)
- Torque: 1 to 5 oz. In. (52XX) or .4 to 4 oz. In. (575X)
- Tuning Tool: 8764
- RoHS Compliant

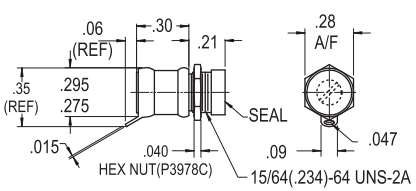
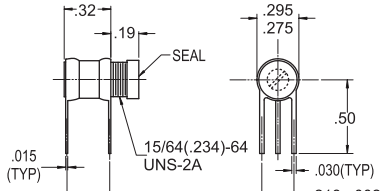
5200 Q @ 100 MHz >5000	
5201 Q @ 100 MHz >5000	
5202 Q @ 100 MHz >5000	

0.8 TO 10 pF

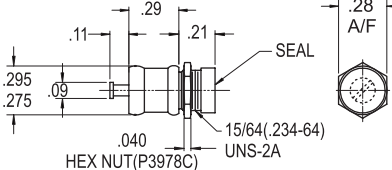

8052 Q @ 100 MHz >5000	
5750 Q @ 100 MHz >7500	
5751 Q @ 100 MHz >7500	
5752 Q @ 100 MHz >7500	
5753 (0.6 to 5 pF) Q @ 100 MHz >7500	

1 TO 14 pF

- Capacitance Range: 1 to 14 pF (>6 turns)
- Working Voltage: 250 VDC (500 VDC Test)
- Torque: 1 to 5.0 oz. In.
- Tuning Tool: 8764
- RoHS Compliant

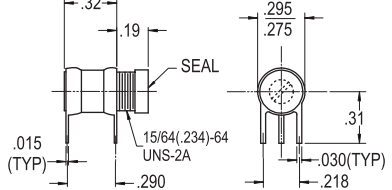

5400 Q @ 100 MHz >3000	
5401 Q @ 100 MHz >3000	

1 TO 14 pF

5402 Q @ 100 MHz >3000	
8053 (1.5 to 14 pF) Q @ 100 MHz >1500	

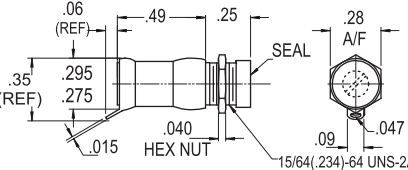
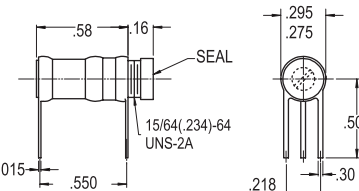
1 TO 16 pF

- Capacitance Range: 1 to 16 pF (>6 turns)
- Working Voltage: 250 VDC (500 VDC Test)
- Torque: 1 to 5 oz. In.
- Tuning Tool: 8764
- RoHS Compliant

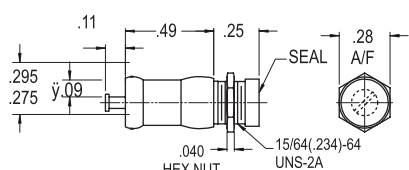
5451 Q @ 100 MHz >3000	
5453 Q @ 100 MHz >3000	

1 TO 20 pF

- Capacitance Range: 1 to 20 pF (>12 turns)
- Working Voltage: 250 VDC (500 VDC Test)
- Torque: 1 to 5 oz. In.
- Tuning Tool: 8764
- RoHS Compliant

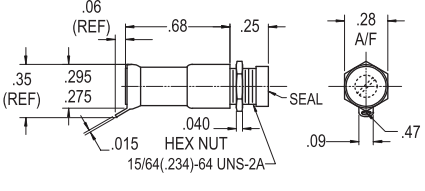
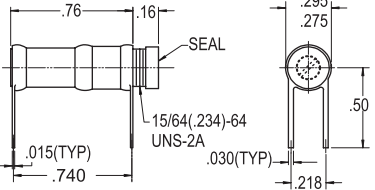
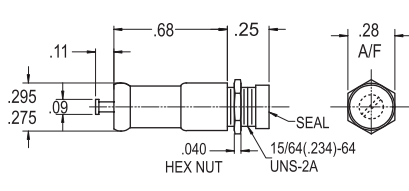
5500 Q @ 100 MHz >1500	
5501 Q @ 100 MHz >1500	

1 TO 20 pF

5502 Q @ 100 MHz >1500	
-------------------------------------	---

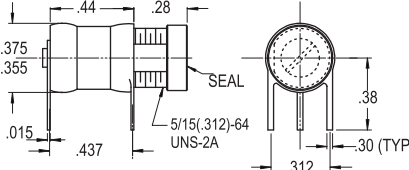
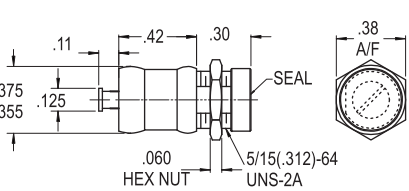
1 TO 30 pF

- Capacitance Range: 1.0 to 10.0 pF (>20 turns)
- Working Voltage: 250 VDC (500 VDC Test)
- Torque: 1 to 5.0 oz. In.
- Tuning Tool: 8764
- RoHS Compliant

5600 Q @ 100 MHz >800	
5601 Q @ 100 MHz >800	
5602 Q @ 100 MHz >800	

1 TO 10 pF (500 VDC)

- Capacitance Range: 1.0 to 10.0 pF (>10 turns)
- Working Voltage: 500 VDC (1000 VDC Test)
- Torque: 1 to 5.0 oz. In.
- Tuning Tool: 8764
- RoHS Compliant

5301 Q @ 100 MHz >2000	
5302 Q @ 100 MHz >2000	



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Knowles:

[1501](#) [1502](#) [1518](#) [1585](#) [5240](#) [5400](#) [5401](#) [5402](#) [5600](#) [5601](#) [5640](#) [5641](#) [5642](#) [5700](#) [5701](#) [5702](#) [5751](#) [5752](#)
[5753](#) [5760](#) [5761](#) [5762](#) [5800](#) [5801](#) [5850](#) [5851](#) [5852](#) [5853](#) [5862](#) [8053](#) [8054](#) [8090](#) [8092](#) [8093](#)