

### 13.75 GHz Surface Mount Bandpass Filter



### **B138MB1S**

### **DESCRIPTION**

One of DLI's surface mountable catalog bandpass filters. This filter utilizes DLI's low loss temperature stable materials which offer small size and minimal performance variation over temperature. The catalog BPF's are offered in a variety of frequency bands, which offers a drop in solution with highly repeatable performance.

### **FEATURES**


- Small Size
- Fully Shielded Component
- Solder Surface Mount Package
- Moisture Sensitivity Level: MSL1
- Frequency Stable over Temperature
- Operating & Storage Temp: -55°C to +125°C
- Characteristic Impedance: 50Ω

### **SPECIFICATIONS\***

Parameter	Frequency Range (GHz)	Min	Тур.	Max
Insertion Loss (dB)	13.25 - 14.25	ı	2.75	3.0
Return Loss (dB)		12	15	ı
Low Side Rejection (dB)	DC - 11.75	40	45	1
High Side Rejection (dB)	15.25– 21.0	40	45	
Input Power (W)				TBD
Size (L x W x H)	0.400 x 0.200 x 0.098 in 10.16 x 5.0 x 2.5 mm			

\*Electrical specifications based on typical probed performance at room temperature. Insertion loss shall vary up to ±0.5dB over

## **Typical Measured Performance**

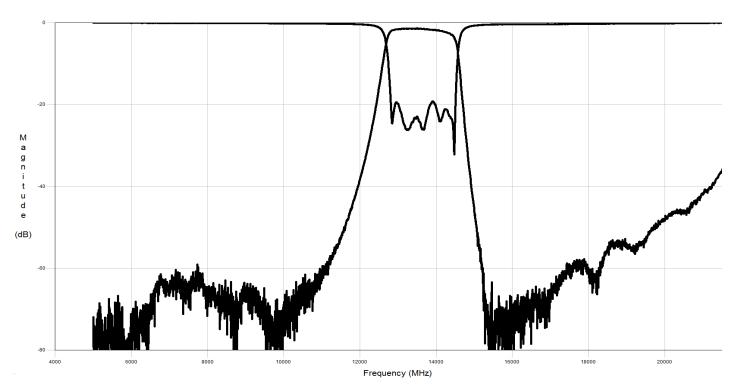



# COMPEX • DLI • JOHANSON MFG NOVACAP • SYFER • VOLTRONICS www.knowlescapacitors.com

### 13.75 GHz Surface Mount Bandpass Filter

### **B138MB1S**

# **Physical Dimensions** Units = inches .400±.002 (.196) CATALOG NUMBEI B138MB1S .200±.002 (.400)STAINLESS STEEL COVER .083 NOM (XAM 800.) CERANIC FILTER -⊪-- .002 TYP. R.0055 .0165 R.0105 054 .021 2X .100 DETAIL A R.027 **Recommended PCB Layout** $50\Omega$ trace dimensions are application specific. Ensure adequate grounding beneath the part.





## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Knowles:

B138MB1S-T B138MB1S