


D-SUBMINIATURE CONNECTORS:

KF88X Series

High Profile Vertical PCB Mount with Ferrite

KF88X Series Dimensions

Dimensions in mm

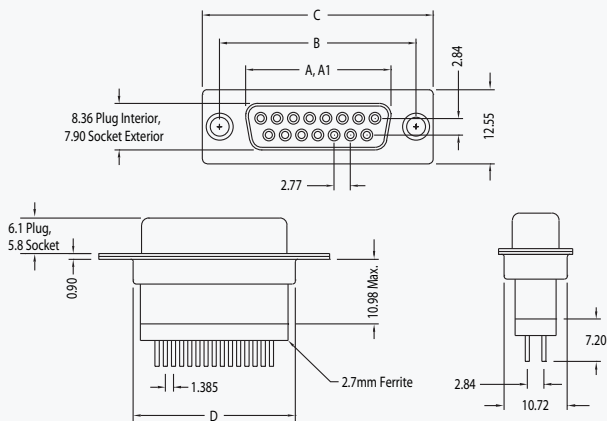

Number of Contacts (Shell Size)	Dimensions (Inch/mm)				
	A	A1	B	C	D
9 (E)	.643 16.33	.666 16.92	.984 24.99	1.213 30.81	.755 19.18
15 (A)	.971 24.66	.994 25.25	1.312 33.32	1.541 39.14	1.083 27.51
25 (B)	1.511 38.38	1.534 38.96	1.852 47.04	2.088 53.04	1.614 41.00
37 (C)	2.159 54.84	2.182 55.42	2.500 63.50	2.729 69.32	2.272 57.71

Ferrite Specifications

Test Frequency	Edge Hole	Inner Hole
30 Mhz	17-27 Ohms	22-30 Ohms
50 Mhz	22-30 Ohms	29-37 Ohms
100 Mhz	29-34 Ohms	35-40 Ohms

A = Exterior of Female Shell (S)

A1 = Interior of Male Shell (P)

[2D Drawing](#)
[IGES](#)
[STEP](#)
[3D PDF](#)
[Solder Profile](#)
[CofC RoHS Compliant](#)
[CofC REACH Compliant](#)
[UL Plastic File](#)
[Certificate of Origin](#)
[Check Stock](#)
[Request a Sample](#)
[Send Us An Email](#)

Generated Part Number

Part Number Builder

<input type="text"/>	-	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Series		Shell Type	Contact Construction	Contact Option	Contact Type	Mounting Option

Series

KF88X - D-Subminiature Connector Vertical PCB Termination, High Profile with Ferrite

Contact Shell Size

E - 9 Contacts

A - 15 Contacts

B - 25 Contacts

C - 37 Contacts

Contact Construction

C - Precision Machined

D - Precision Formed

Contact Type

P - Pin Contact (Plug)

S - Socket Contact (Receptacle)

Mounting Option Jackscrew Option

BR - With #4-40 Tin Plated 14.50mm Long Boardlocks

BRJ - With #4-40 Tin Plated 14.50mm Long Boardlocks and #4-40 Jackscrews

Contact Kycon for Other Options

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Kycon:

[KF88X-CC-37P-BR](#) [KF88X-BD-25S-BR](#) [KF88X-BD-25S-BRJ](#) [KF88X-AC-15P-BRJ](#) [KF88X-ED-9P-BR](#) [KF88X-ED-9P-BRJ](#) [KF88X-AD-15S-BRJ](#) [KF88X-CD-37P-BR](#) [KF88X-BC-25S-BR](#) [KF88X-AC-15S-BR](#) [KF88X-CD-37S-BR](#) [KF88X-AC-15P-BR](#) [KF88X-AC-15S-BRJ](#) [KF88X-ED-9S-BRJ](#) [KF88X-EC-9P-BR](#) [KF88X-BD-25P-BRJ](#) [KF88X-BC-25P-BRJ](#) [KF88X-AD-15P-BRJ](#) [KF88X-BC-25S-BRJ](#) [KF88X-AD-15S-BR](#) [KF88X-BC-25P-BR](#) [KF88X-CD-37P-BRJ](#) [KF88X-BD-25P-BR](#) [KF88X-EC-9S-BR](#) [KF88X-CC-37P-BRJ](#) [KF88X-CD-37S-BRJ](#) [KF88X-EC-9P-BRJ](#) [KF88X-AD-15P-BR](#) [KF88X-CC-37S-BRJ](#) [KF88X-CC-37S-BR](#) [KF88X-ED-9S-BR](#) [KF88X-EC-9S-BRJ](#) [KF88X-AD-15S-30](#) [KF88X-AD-15S-BRJ30](#) [KF88X-CD-37S-BRJ15](#) [KF88X-BC-25P](#) [KF88X-CD-37S-K15](#) [KF88X-CD-37P-30](#) [KF88X-BD-25P-BR30](#) [KF88X-BD-25P-BRJ30](#) [KF88X-AC-15S-R](#) [KF88X-AD-15P](#) [KF88X-CD-37S-BR15](#) [KF88X-BD-25S-KJ15](#) [KF88X-CD-37P-R15](#) [KF88X-ED-9P-BRJ15](#) [KF88X-EC-9P](#) [KF88X-AD-15P-R30](#) [KF88X-ED-9P-R15](#) [KF88X-AD-15S-BR30](#) [KF88X-AD-15P-KJ30](#) [KF88X-CD-37S-15](#) [KF88X-AD-15S-R15](#) [KF88X-ED-9P-K15](#) [KF88X-BD-25S-BRJ30](#) [KF88X-CD-37S-BR30](#) [KF88X-BC-25P-R](#) [KF88X-BD-25S-K30](#) [KF88X-CD-37P-KJ30](#) [KF88X-AD-15P-KJ](#) [KF88X-ED-9S-15](#) [KF88X-BD-25S-30](#) [KF88X-BD-25P-30](#) [KF88X-BD-25S-BRJ15](#) [KF88X-ED-9P-K30](#) [KF88X-BC-25S](#) [KF88X-EC-9S-K](#) [KF88X-CD-37P](#) [KF88X-ED-9S-K15](#) [KF88X-AD-15S-K30](#) [KF88X-BC-25P-KJ](#) [KF88X-CD-37P-K30](#) [KF88X-CC-37S](#) [KF88X-AD-15S-R30](#) [KF88X-BD-25P-K](#) [KF88X-ED-9S-KJ15](#) [KF88X-CD-37P-R30](#) [KF88X-ED-9P-BRJ30](#) [KF88X-ED-9S-R15](#) [KF88X-CC-37S-R](#) [KF88X-CD-37S-R15](#) [KF88X-CD-37S-R30](#) [KF88X-BC-25S-KJ](#) [KF88X-ED-9S-K30](#) [KF88X-BD-25P-15](#) [KF88X-ED-9S-BR15](#) [KF88X-AD-15P-K](#) [KF88X-BD-25S-BR30](#) [KF88X-EC-9P-R](#) [KF88X-BC-25P-K](#) [KF88X-CD-37S](#) [KF88X-AC-15P-K](#) [KF88X-AD-15S-KJ](#) [KF88X-BD-25P-BR15](#) [KF88X-ED-9S-BRJ30](#) [KF88X-BD-25S-K](#) [KF88X-EC-9S-KJ](#) [KF88X-AD-15S-KJ30](#) [KF88X-CD-37P-KJ](#) [KF88X-CD-37P-R](#)