


TRIO mXTEND™ (NN03-310)

The TRIO mXTEND™ chip antenna component is an **ultra slim**, off-the-shelf, component that measures only 1.0 mm in height, giving the designer freedom to integrate it in just about all wireless platforms. Thanks to its modular, multiband and **multiport configuration**, this chip antenna works in multiple frequency regions, including connectivity within **2G, 3G, 4G** and **5G bands**, but also for other regions of the spectrum such as **GNSS** and **Bluetooth**.

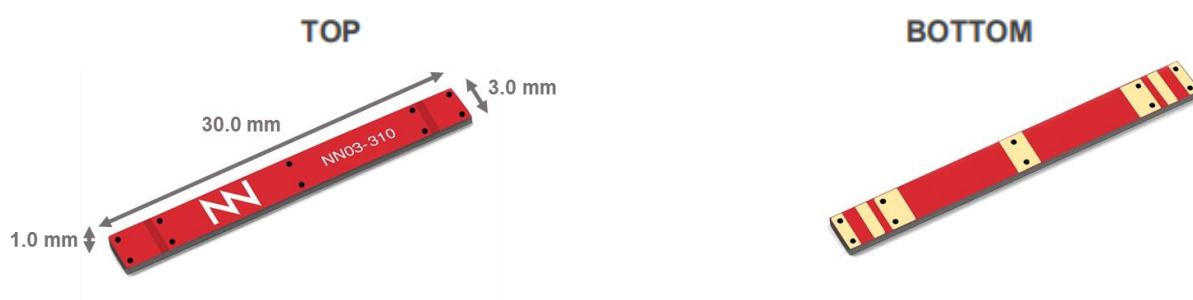

Product Benefits

- **Top performance:** Top multiband worldwide sub-6GHz cellular/IoT performance in a multi-RAT and 3 independent port antenna component.
- **Multiband & Multiport:** All cellular/ISM bands: 2G/3G/4G/5G and NB-IoT/LTE-M applications with additional GNSS, Bluetooth, Wi-Fi 6E, UWB simultaneously.
- **Versatile:** Triple radio architecture in a single, small and ultra-slim antenna package: 30mm x 1.0mm x 3.0mm.
- **Global reach:** Through multiband performance (worldwide standard compatible)
- **Reliability:** Off-the-Shelf standard product, no antenna part customization (electronic optimization)
- **Use cases:** Best for top performing compact tracking devices, IoT sensors, IoT cellular/ISM modules and mobile devices.

Operation Bands Summary

- GSM, UMTS, LTE, 5G, GNSS, Bluetooth (617 – 960MHz, 1710 – 2690MHz, 3300 – 3800MHz, 1561 – 1606 MHz and 2400 – 2500 MHz)

1. AVAILABLE SOLUTIONS SUMMARY

Class	Frequency Regions	Frequency range	More detailed info
1 Port	2	698 – 960 MHz & 1710 – 2690 MHz	<u>Cellular LTE</u>
2 Ports	3	698 – 960 MHz, 1710 – 2690 MHz & 3400 – 3800 MHz	<u>Cellular LTE + 5G</u>
2 Ports	5	824 – 960 MHz, 1710 – 2170 MHz, 1561 MHz, 1575 MHz & 1598 – 1606 MHz	<u>Cellular LTE + GNSS</u>
3 Ports	6	824 – 960 MHz, 1710 – 1990 MHz, 1561 MHz, 1575 MHz, 1598 – 1606 MHz & 2400 – 2500 MHz	<u>Mobile + GNSS + Bluetooth</u>

2. DETAILED AVAILABLE SOLUTIONS

2.1. LTE SOLUTION

Technical features	698 – 960 MHz	1710 – 2690 MHz
Average Efficiency	> 55 %	> 65 %
Peak Gain	1.1 dBi	2.4 dBi
VSWR	< 3:1	
Radiation Pattern	Omnidirectional	
Polarization	Linear	
Weight (approx.)	0.25 g	
Temperature	-40 to +125 °C	
Impedance	50 Ω	
Dimensions (L x W x H)	30.0 mm x 3.0 mm x 1.0 mm	

Technical features. Measures from the evaluation board (142 mm x 60 mm x 1 mm).

2.2. LTE + 5G SOLUTION

Technical features	698 – 960 MHz	1710 – 2690 MHz	3400 – 3800 MHz
Average Efficiency	> 50 %	> 60 %	> 65 %
Peak Gain	1.5 dBi	2.7 dBi	3.8 dBi
VSWR	< 3:1		< 2:1
Radiation Pattern	Omnidirectional		
Polarization	Linear		
Weight (approx.)	0.25 g		
Temperature	-40 to +125 °C		
Impedance	50 Ω		
Dimensions (L x W x H)	30.0 mm x 3.0 mm x 1.0 mm		

Technical features. Measures from the evaluation board (142 mm x 60 mm x 1 mm).

2.3. LTE + GNSS SOLUTION

Technical features	824 – 960 MHz	1710 – 2170 MHz	1561 MHz	1575 MHz	1598 – 1606 MHz
Average Efficiency	> 55 %	> 60 %	> 40 %	> 40 %	> 40 %
Peak Gain	1.9 dBi	1.9 dBi	0.5 dBi	0.8 dBi	1.5 dBi
VSWR	< 3:1				
Radiation Pattern	Omnidirectional				
Polarization	Linear				
Weight (approx.)	0.25 g				
Temperature	-40 to +125 °C				
Impedance	50 Ω				
Dimensions (L x W x H)	30.0 mm x 3.0 mm x 1.0 mm				

Technical features. Measures from the evaluation board (142 mm x 60 mm x 1 mm).

2.4. LTE + GNSS + BLUETOOTH SOLUTION

Technical features	Port 1 824-960 MHz	Port 1 1710-1990 MHz	Port 2 1561-1606 MHz	Port 3 2400-2500MHz
Average Efficiency	> 50%	> 60%	> 50%	> 75%
Peak Gain	0.4 dBi	1.9 dBi	0.9 dBi	2.4 dBi
VSWR	< 2.8:1	< 2.1:1	< 2.1:1	< 2.0:1
Radiation Pattern	Omnidirectional			
Polarization	Linear			
Weight (approx.)	0.25 g.			
Temperature	-40 to +125 °C			
Impedance	50 Ω			
Dimensions (L x W x H)	30.0 mm x 3.0 mm x 1.0 mm			

Technical features. Measures from the evaluation board 142 mm x 60 mm x 1 mm).

If you need assistance to design your matching network, please contact support@fractusantennas.com

You can also try our free of charge **NN Wireless Fast Track service** you will receive a tailored antenna design approach for free in 24h¹. discover the feasibility of your next wireless project including the antenna!

¹ See terms and conditions for a free NN Wireless Fast-Track service in 24h at: <https://www.fractusantennas.com/fast-track-project/>

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Fractus Antennas:](#)

[NN03-310](#)