
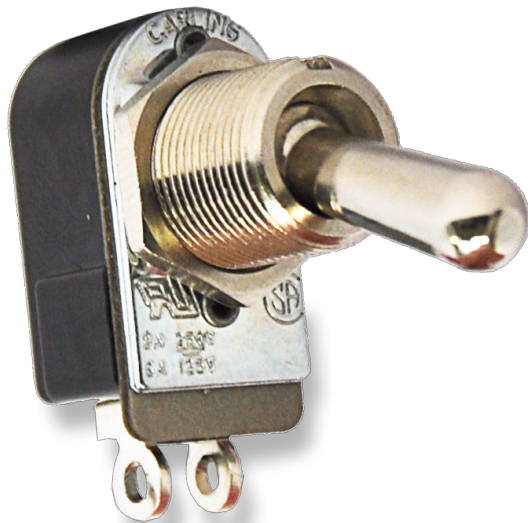


110/216-Series

Heavy Action Toggle Switches

PRODUCT WEBPAGE

request sample, configure part

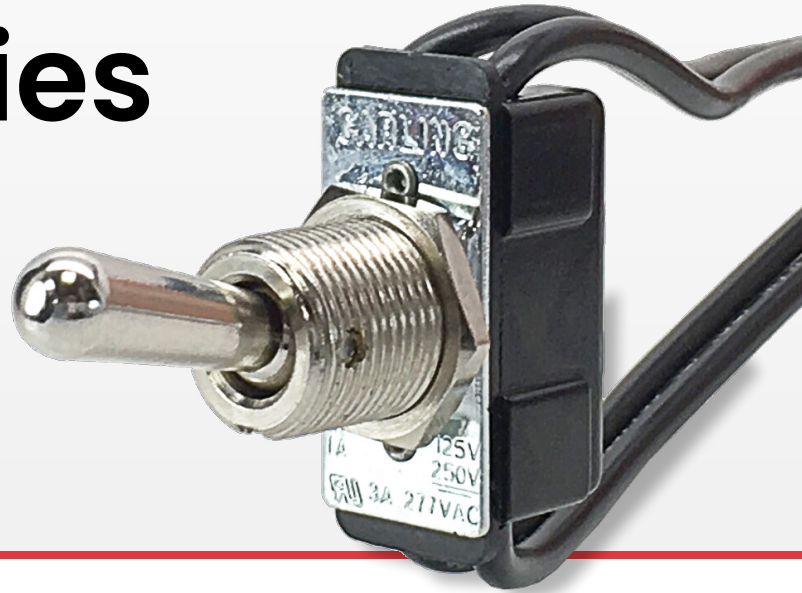

The 110/216-Series is a compactly designed, versatile metal construction toggle switch which is appropriate for a variety of uses. Features include single or double pole options, maintained or momentary construction with termination choices including solder lug end or bottom, wire leads and .250 tab terminals. The quick make/quick break contact mechanism makes the switch suitable for high voltage (125-250 volt) applications.

1-2
Poles

1-10
Amps

125, 250
VAC

125, 250
VDC

Typical Applications

- Small Appliances
- Floor Maintenance
- Lighting

Tech Specs

Dielectric Strength

UL/CSA: 1000V - live to dead
metal parts & opposite polarity

Electrical Life

25,000 cycles

Operating Temperature

0°F to 150°F (-17.8°C to +65.6°C)

Ordering Scheme

Sample
Part Number

110-S 73

Selection

1

2

1. SERIES

3A 250V, 6A 125V, AC/DC

	Solder Lug (end)	Solder Lug (bottom)	Screw Terminals	Wire Leads
Single Pole				
On-None-Off	110	110-B	110-S	111-16
Off-None-(On)	110-M-NO	110-BM-NO	110-SM-NO	111-16M-NO
On-None-(Off)	110-M-NC	110-BM-NC	110-SM-NC	111-16M-NC
Double Pole				
On-None-Off	2BK62	-	-	2BK65
On-None-On	2BL62	-	-	2BL65

1A 250V, 3A 125V, AC/DC

Single Pole				
On-None-On	112	-	-	112-A
On-None-(On)	112-M	-	-	112-M-A
Double Pole				
On-None-Off	216	-	-	216A
Off-None-(On)	216-M-NO	-	-	216A-M-ANO
On-None-(Off)	216-M-NC	-	-	216A-M-ANC
On-None-On	316	316-B	-	-
On-None-(On)	316-M	316-BM	-	-

2 circuit

1 On - 1 Off	516	516-B	-	516-A
1 (On) - 1 (Off)	516-M	516-BM	-	516-AM

6A 120VAC

Single Pole				
On-None-On	2BB62	-	-	2BB65

5A 250V, 10A 125V, 1/4HP, 125V

Single Pole				
On-None-Off	160H	160H-B	160H-S	160H-A

2. KNOB COLOR

BAT STYLE TOGGLE

unsealed	sealed	toggle length	bushing length
52	57	0.375	0.343
63	68	0.500	0.465
73	78	0.687	0.46555

BALL STYLE TOGGLE

unsealed	sealed	toggle length	bushing length
21	-	0.375	0.250
22	-	0.375	0.343
25	-	0.375	0.875

Notes:


- 1 Momentary function only available with 73 toggles.
 - 2 160H and 110-Series are available with .250 tab terminals. Add suffix /TABS to end of part number. ex. 110-73/TABS
- () Indicates momentary function.

[Configure Complete Part Number >](#)

[Browse Standard Parts >](#)

Dimensional Specs

inches [millimeters]

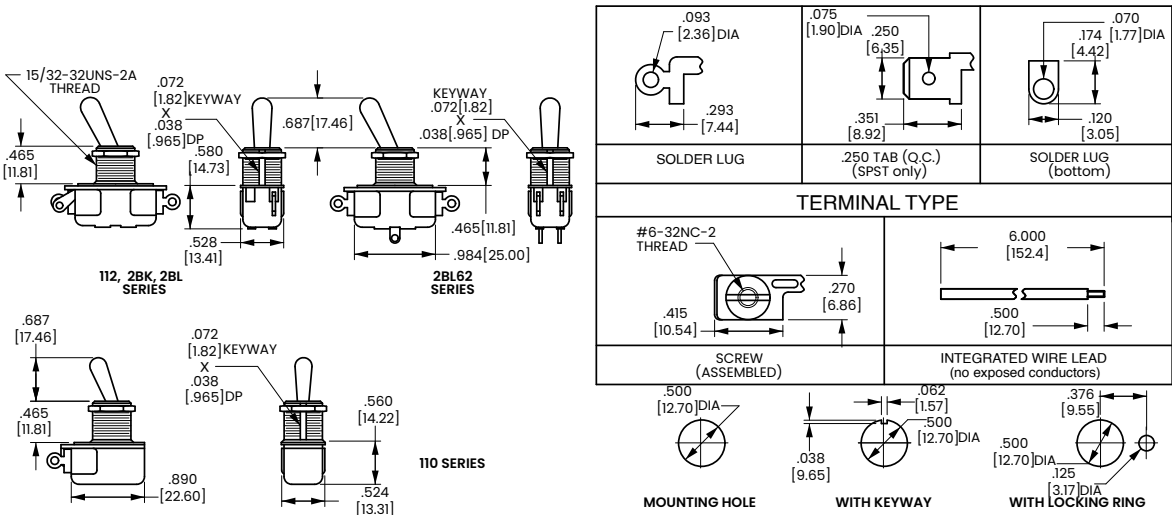

Authorized Sales Representatives and Distributors

Click on a region of the map below to find your local representatives and distributors or visit www.carlingtech.com/findarep.



About Carling

Founded in 1920, Carling Technologies is a leading manufacturer of electrical and electronic switches and assemblies, circuit breakers, electronic controls, power distribution units, and multiplexed power distribution systems. With six ISO9001 and IATF16949 registered manufacturing facilities and technical sales offices worldwide, Carling Technologies Sales, Service and Engineering teams do much more than manufacture electrical components, they engineer powerful solutions! To learn more about Carling please visit www.carlingtech.com/company-profile.

To view all of Carling's environmental, quality, health & safety certifications please visit www.carlingtech.com/environmental-certifications.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Carling Technologies:](#)

[110-73](#) [111-16-22](#) [111-16-73](#) [110-S-73](#) [2BB62-73](#) [2BK65-73](#) [110-B-73](#) [2BL62-73](#) [160H-73](#) [160H-A-73](#) [2BL62-63](#) [110-52](#) [110-B-62](#) [110-B-63](#) [2BK62-22](#) [2BK62-63](#) [2BK62-73](#) [2BK62-73/POLY](#) [2BK65-21](#) [2BL63-63](#) [2BL65-21](#) [516-A-73](#) [272-06747](#) [112-M-63](#) [2BL62-21](#) [110-M-NO-73](#) [160H-A-52](#) [110-21](#) [110-23/TABS](#) [110-63/TABS](#) [110-62](#) [110-67](#) [110-73/POLY](#) [316-B-78](#) [2BL63-78](#) [110-B-57](#) [160H-78/TABS](#) [2BK65-73/POLY](#) [2BK65-23](#) [316-M-73](#) [216-A-73](#) [2BK65-78](#) [2BB65-21](#) [516-A-21](#) [516-BM-73](#) [216-22](#) [216-M-A-NC-73](#) [160H-71](#) [160H-A-22](#) [160H-B-63](#) [160H-S-73](#) [160H-B-73/POLY](#) [111-16-21/272-06747/HDW BULK](#) [111-16-57](#) [111-16M-NO-73](#) [160H-22](#) [110-S-62](#) [110-SM-NO-73](#) [111-16-22/NO HDW](#) [111-16-71](#) [110-S-52](#) [110-SM-NO-73/2 HEX/POLY](#) [110-S-73/HDW ASSM](#) [111-16-22/POLY](#) [110-SM-NC-73](#) [110-57](#) [110-73/1 HEX BULK](#) [110-78/2 HEX](#) [110-B-52](#) [110-B-22/NO HDW](#) [110-S-78](#) [2BB62-78](#) [2BK62-57](#) [160H-S-21](#) [111-16-22/272-06747](#) [160H-B-62](#) [110-S-63/2 HEX](#) [110-73/272-06747](#) [160H-A-22/2 HEX](#) [111-16-63/272-06935](#) [111-16-73/2 HEX/272-06764](#) [216-A-68](#) [2BK62-68](#) [2BL62-78](#) [110-SM-NO-63](#) [112-M-63/728-15946](#) [110-S-57](#) [160H-B-21](#) [2BB65-68](#) [160H-B-57](#) [2BK65-57](#) [112-52](#) [2BB62-22](#) [110-S-73/HDW BULK](#) [110-S-78/272-06747](#) [2BK62-52](#) [110-B-73/TABS](#) [112-A-68](#) [112-M-A-73/2 HEX](#) [160H-B-78](#)