




# Power Schottky Rectifier with common cathode

$$I_{FAV} = 2 \times 30 \text{ A}$$

$$V_{RRM} = 150 \text{ V}$$

$$V_F = 0.66 \text{ V}$$

| $V_{RSM}$ | $V_{RRM}$ | Type          |
|-----------|-----------|---------------|
| V         | V         |               |
| 150       | 150       | DSSK 60-015A  |
| 150       | 150       | DSSK 60-015AR |


**TO-247 AD**  
Version A

**ISOPLUS 247™**  
Version AR


\* Patent pending

C = Cathode, A = Anode, TAB = Cathode

| Symbol         | Conditions  | Maximum Ratings |                  |
|----------------|---|-----------------|------------------|
| $I_{FRMS}$     |   | 70              | A                |
| $I_{FAV}$      | $T_C = 155^\circ\text{C}$ ; rectangular, $d = 0.5$  | 30              | A                |
| $I_{FAV}$      | $T_C = 155^\circ\text{C}$ ; rectangular, $d = 0.5$ ; per device                               | 60              | A                |
| $I_{FSM}$      | $T_{VJ} = 45^\circ\text{C}$ ; $t_p = 10 \text{ ms}$ (50 Hz), sine                             | 600             | A                |
| $E_{AS}$       | $I_{AS} = 4 \text{ A}$ ; $L = 100 \mu\text{H}$ ; $T_{VJ} = 25^\circ\text{C}$ ; non repetitive | 0.8             | mJ               |
| $I_{AR}$       | $V_A = 1.5 \cdot V_{RRM}$ typ.; $f = 10 \text{ kHz}$ ; repetitive                             | 0.4             | A                |
| $(dv/dt)_{cr}$ |   | 18000           | V/ $\mu\text{s}$ |
| $T_{VJ}$       |   | -55...+175      | $^\circ\text{C}$ |
| $T_{VJM}$      |   | 175             | $^\circ\text{C}$ |
| $T_{stg}$      |   | -55...+150      | $^\circ\text{C}$ |
| $P_{tot}$      | $T_C = 25^\circ\text{C}$  | 190             | W                |
| $M_d$          | Version A: mounting torque M3   | 0.8...1.2       | Nm               |
| $F_C$          | Version AR: mounting force with clip  | 20...120        | N                |
| $V_{ISOL}^*$   | 50/60 Hz, RMS, $t = 1 \text{ minute}$ , leads-to-tab  | 2500            | V~               |
| <b>Weight</b>  | typical   | 6               | g                |

\* Version AR only

## Features

- International standard package
- Very low  $V_F$
- Extremely low switching losses
- Low  $I_{RM}$ -values
- Epoxy meets UL 94V-0
- Version ..R isolated and UL registered E153432

## Applications

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

## Advantages

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses

 Dimensions see [Outlines.pdf](#)

| Symbol     | Conditions  | Characteristic Values |         |
|------------|---|-----------------------|---------|
|            |   | typ.                  | max.    |
| $I_R$ ①    | $V_R = V_{RRM}$ ; $T_{VJ} = 25^\circ\text{C}$       |                       | 2 mA    |
|            | $V_R = V_{RRM}$ ; $T_{VJ} = 125^\circ\text{C}$      |                       | 20 mA   |
| $V_F$      | $I_F = 30 \text{ A}$ ; $T_{VJ} = 125^\circ\text{C}$ |                       | 0.66 V  |
|            | $I_F = 30 \text{ A}$ ; $T_{VJ} = 25^\circ\text{C}$  |                       | 0.81 V  |
|            | $I_F = 60 \text{ A}$ ; $T_{VJ} = 125^\circ\text{C}$ |                       | 0.80 V  |
| $R_{thJC}$ |   | 0.25                  | 0.8 K/W |
| $R_{thCH}$ |   |                       | K/W     |

Pulse test: ① Pulse Width = 5 ms, Duty Cycle &lt; 2.0 %

Data according to IEC 60747 and per diode unless otherwise specified

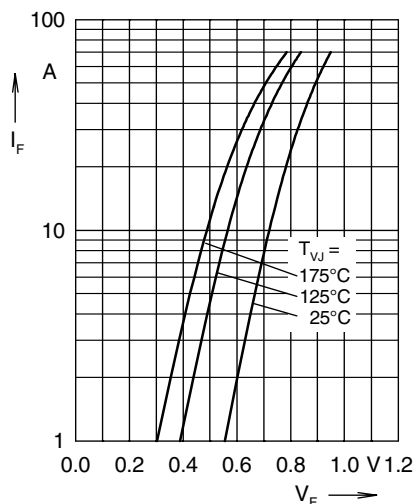


Fig. 1 Maximum forward voltage drop characteristics

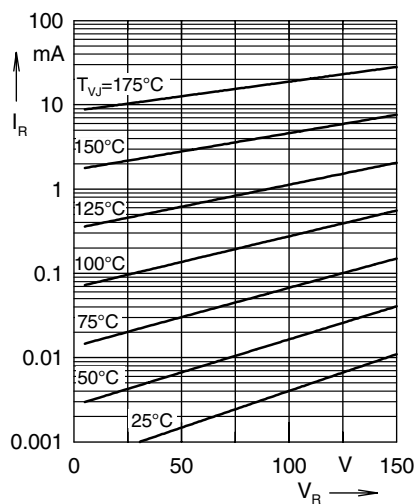


Fig. 2 Typ. value of reverse current  $I_R$  versus reverse voltage  $V_R$

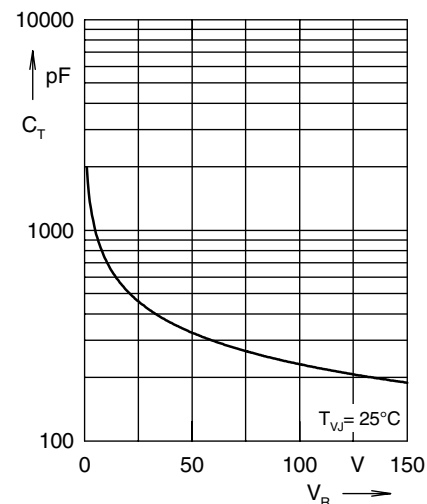


Fig. 3 Typ. junction capacitance  $C_T$  versus reverse voltage  $V_R$

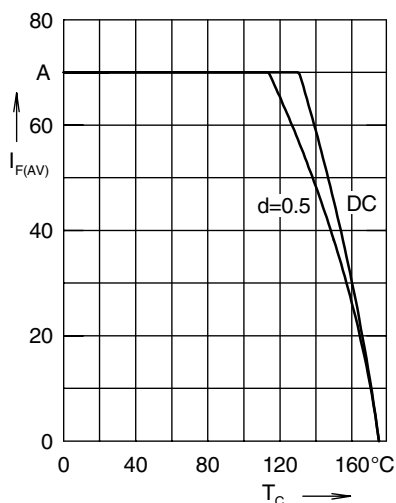


Fig. 4 Average forward current  $I_{F(AV)}$  versus case temperature  $T_C$

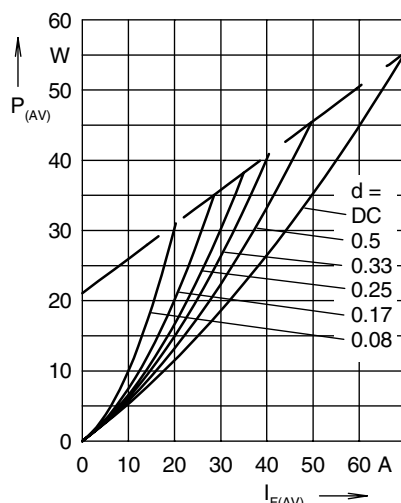


Fig. 5 Forward power loss characteristics

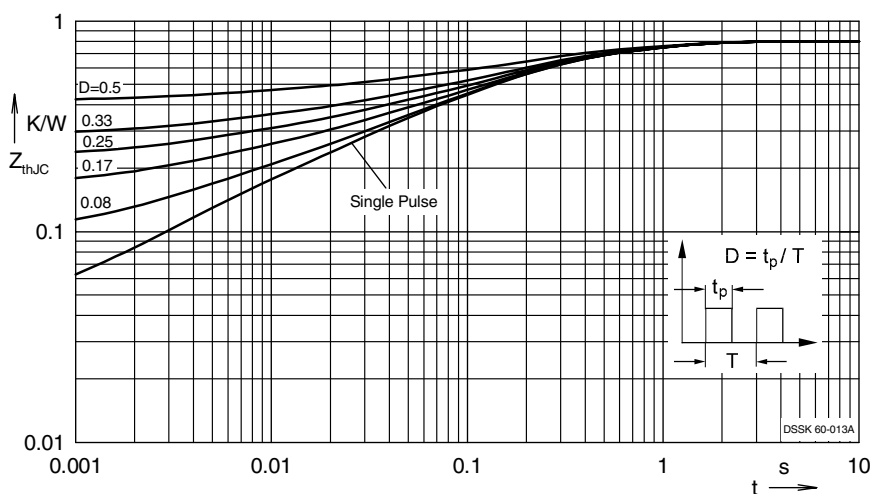


Fig. 6 Transient thermal impedance junction to case at various duty cycles

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[IXYS:](#)

[DSSK60-015A](#) [DSSK60-015AR](#)