

Power Schottky Rectifier


$$I_{FAV} = 2 \times 20 \text{ A}$$

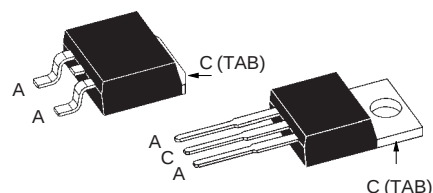
$$V_{RRM} = 25 \text{ V}$$

$$V_F = 0.40 \text{ V}$$

Preliminary Data

V_{RSM} V	V_{RRM} V	Type
25	25	DSSK 38-0025B
25	25	DSSK 38-0025BS


TO-263 AB
 (...S-Type)

TO-220 AC


A = Anode, C = Cathode, TAB = Cathode

Symbol	Conditions	Maximum Ratings	
I_{FRMS}		35	A
I_{FAV}	$T_C = 130^\circ\text{C}$; rectangular, d = 0.5	20	A
I_{FAV}	$T_C = 130^\circ\text{C}$; rectangular, d = 0.5; per device	40	A
I_{FSM}	$T_{VJ} = 45^\circ\text{C}$; $t_p = 10 \text{ ms}$ (50 Hz), sine	330	A
E_{AS}	$I_{AS} = \text{tbd A}$; $L = 180 \mu\text{H}$; $T_{VJ} = 25^\circ\text{C}$; non repetitive	tbd	mJ
I_{AR}	$V_A = 1.5 \cdot V_{RRM}$ typ.; $f = 10 \text{ kHz}$; repetitive	tbd	A
$(dv/dt)_{cr}$		tbd	V/ μs
T_{VJ}		-55...+150	$^\circ\text{C}$
T_{VJM}		150	$^\circ\text{C}$
T_{stg}		-55...+150	$^\circ\text{C}$
P_{tot}	$T_C = 25^\circ\text{C}$	90	W
M_d	mounting torque	0.4...0.6	Nm
Weight	typical	2	g

Features

- International standard package
- Very low V_F
- Extremely low switching losses
- Low I_{RM} -values
- Epoxy meets UL 94V-0

Applications

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

Advantages

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses

Dimensions see Outlines.pdf

Symbol	Conditions	Characteristic Values	
		typ.	max.
I_R ①	$T_{VJ} = 25^\circ\text{C}$ $V_R = V_{RRM}$ $T_{VJ} = 100^\circ\text{C}$ $V_R = V_{RRM}$	20 80	mA mA
V_F	$I_F = 20 \text{ A}$; $T_{VJ} = 125^\circ\text{C}$ $I_F = 20 \text{ A}$; $T_{VJ} = 25^\circ\text{C}$ $I_F = 40 \text{ A}$; $T_{VJ} = 125^\circ\text{C}$	0.40 0.48 0.58	V V V
R_{thJC} R_{thCH}	0.5	1.4	K/W K/W

Pulse test: ① Pulse Width = 5 ms, Duty Cycle < 2.0 %
 Data according to IEC 60747 and per diode unless otherwise specified

IXYS reserves the right to change limits, Conditions and dimensions.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[IXYS:](#)

[DSSK38-0025B](#) [DSSK38-0025BS](#) [DSSK38-0025BS-TUBE](#)