

## ZSCT SERIES

### Current Transformer



### Description

The ZSCT series is a current transformer used with Littelfuse relays to detect low levels of earth-leakage current.

### Accessories



#### CBLTP

Twisted-pair wire for connection to CT.  
Order in desired length in meters.

### Specifications

#### Current Rating

**ZSCT5:** 5:0.05 A

**ZSCT30:** 30:0.05A

#### Accuracy

**ZSCT5:** 3% @ 0.01 VA

**ZSCT30:** 3% @ 0.06 VA

#### Frequency

50 to 400 Hz

#### Insulation Level

600V

#### Operating Temperature

-40 to 55° C (-40 to 131° F)

#### Application

MP8000

#### Wire Gauge

0.05-3.3mm<sup>2</sup> (12-30 AWG)

#### Tightening Torque

0.5 N-m

#### Certification

UL, cUL, CE



#### Compliance

RoHS, IEC 61869-2, ANSI/IEEE C57.13

### Ordering Information

ORDERING NUMBER	TURNS RATIO	WINDOW SIZE, ID	WEIGHT
ZSCT5-31	100:1	31mm (1.22 in)	117.9 g (0.26 lbs)
ZSCT5-88	100:1	88mm (3.46 in)	499.0 g (1.10 lbs)
ZSCT30-31	600:1	31mm (1.22 in)	113.4 g (0.25 lbs)

Note: One frequency response may be extended for specific product families

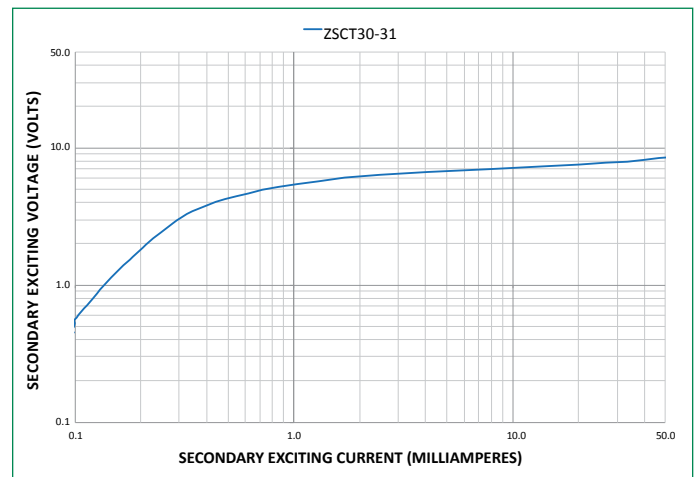
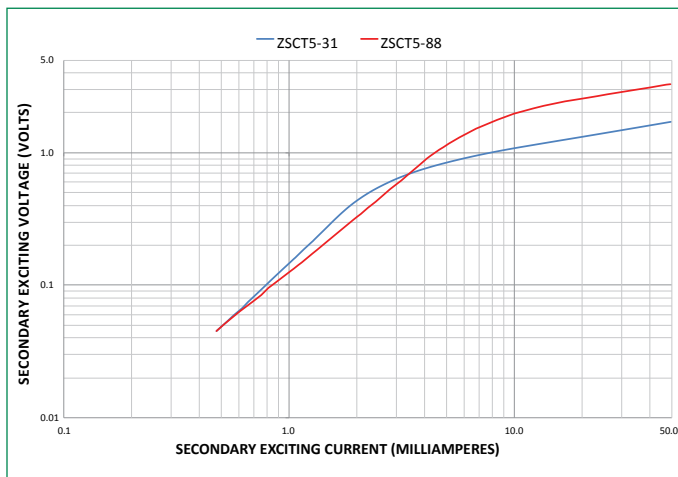


## ZSCT SERIES



### Dimensions and Mounting Diagram Inches [millimeters]

Mount the ZSCT5-31 and ZSCT30-31 using M5 or #10 screws.


Mount the ZSCT5-88 using M6 or ¼" screws.

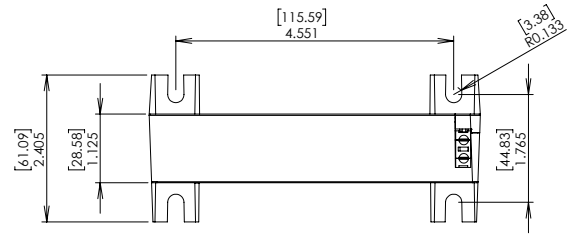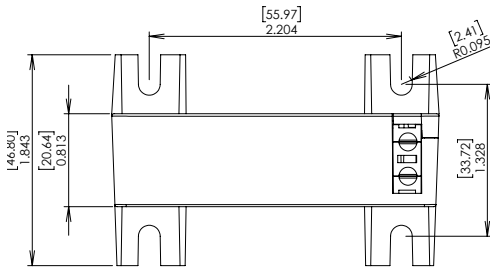


**TOP VIEW AND MOUNTING DETAIL**

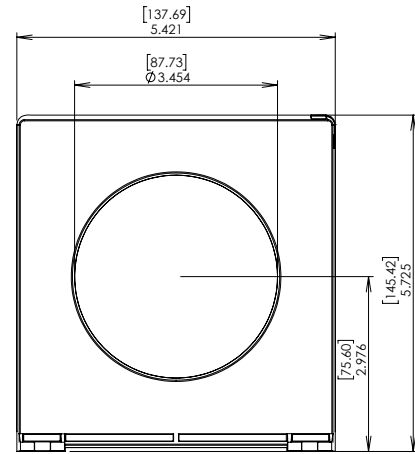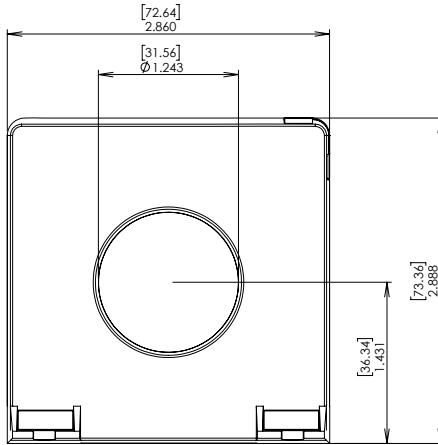

**FRONT VIEW**

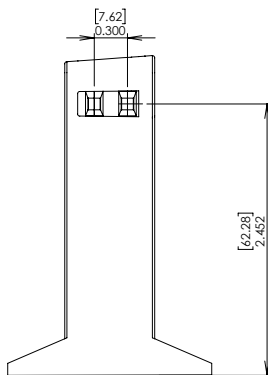

**ZSCT5-31 and ZSCT30-31**

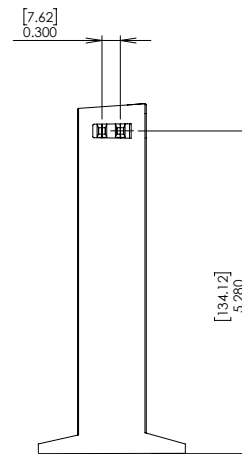

**ZSCT5-88**

**SIDE VIEW**

**Disclaimer Notice** – Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/product-disclaimer](http://www.littelfuse.com/product-disclaimer).

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Littelfuse:](#)

[ZSCT30-31](#) [ZSCT5-88](#) [ZSCT5-31](#)