



Mini-Circuits®

SURFACE MOUNT

Power Splitter/Combiner

ADQ-32W+

2 Way-90° 50Ω 104 to 340 MHz

FEATURES

- Wideband, 104 to 340 MHz
- Good isolation, 20 dB typ.
- Good VSWR, 1.24 typ.
- Small size surface mount



Generic photo used for illustration purposes only

CASE STYLE: CJ725

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- Point to point microwave link
- VHF/UHF receivers/transmitters

ELECTRICAL SPECIFICATIONS


Parameter		Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		—	104	—	340	MHz
Insertion Loss Avg. of Coupled Outputs above 3 dB		104-340	—	0.6	0.9	dB
Isolation		104-340	16	20	—	dB
Phase Unbalance		104-340	—	3	8	Degree
Amplitude Unbalance		104-340	—	0.8	1.8	dB
VSWR	S-Port	104-340	—	1.22	—	:1
	Output	104-340	—	1.25	—	

ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C
Power Input (as a splitter)	0.5W Max.

Permanent damage may occur if any of these limits are exceeded.

ELECTRICAL SCHEMATIC



Mini-Circuits®

www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. C
ECO-019621
ADQ-32W+
MCL NY
231017

PAGE 1 OF 3



Power Splitter/Combiner

ADQ-32W+

2 Way-90° 50Ω 104 to 340 MHz

OUTLINE DRAWING

MECHANICAL DRAWING OF A 5-PIN D-SUBMINIATURE CONNECTOR. DIMENSIONS ARE IN INCHES AND MILLIMETERS.

FRONT VIEW DIMENSIONS:

- Overall Width: .420 [10.67]
- Overall Height: .310 [7.87]
- Pin 1 Location (from left edge): .100 [2.54]
- Pin 1 Location (from top edge): .060 [1.52]
- Pin Spacing (between pins 2, 3, 4, and 5): .020 [0.51] TYP

SIDE VIEW DIMENSIONS:

- Maximum Height: .215 [5.46] MAX
- Body Height: .397 [10.08]
- Pin Height: .032 [0.813] TYP

PIN IDENTIFICATION:

- Pins are numbered 1 through 5.
- Pin 1 is the reference pin (INDEX).

SUGGESTED LAYOUT
FOR PCB LAND PATTERN
PATTERN TO BE WITHIN $\pm .002$

Weight: .40 gram
Dimensions are in inches [mm]. Tolerances: 2 Pl. $\pm .01$; 3Pl. $\pm .005$ Inch

Notes:

1. Case material: Plastic.
2. Termination Finish: Tin plate over Nickel plate.

TAPE & REEL INFORMATION: F10

[illegible]

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B
WITH DIELECTRIC THICKNESS 0.020" $\pm$ 0.0015".
COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH MAY NEED
TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK





Mini-Circuits

SURFACE MOUNT

Power Splitter/Combiner




ADQ-32W+

2 Way-90° 50Ω 104 to 340 MHz

TYPICAL PERFORMANCE DATA

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR (:1)		
	S-1	S-2				S	1	2
104.00	2.65	3.99	1.34	22.56	90.93	1.20	1.22	1.22
106.00	2.70	3.93	1.23	22.43	90.97	1.20	1.22	1.22
110.00	2.80	3.82	1.02	22.15	91.02	1.20	1.22	1.22
120.00	3.03	3.58	0.55	21.58	91.15	1.20	1.22	1.23
140.00	3.40	3.26	0.14	20.67	91.41	1.21	1.23	1.23
160.00	3.67	3.07	0.60	20.12	91.68	1.21	1.24	1.24
180.00	3.84	2.98	0.87	19.90	91.94	1.20	1.25	1.25
200.00	3.92	2.95	0.98	19.96	92.15	1.19	1.25	1.25
240.00	3.86	3.04	0.82	21.04	92.47	1.17	1.24	1.24
280.00	3.59	3.32	0.27	24.27	92.65	1.12	1.20	1.22
300.00	3.39	3.53	0.14	27.41	92.73	1.08	1.16	1.19
320.00	3.18	3.81	0.63	30.93	92.86	1.05	1.12	1.17
325.00	3.12	3.89	0.77	31.02	92.91	1.05	1.11	1.17
329.00	3.08	3.96	0.88	30.66	92.95	1.05	1.10	1.17
340.00	2.95	4.16	1.21	28.27	93.11	1.07	1.08	1.17

1. Total Loss = Insertion Loss + 3dB splitter loss.

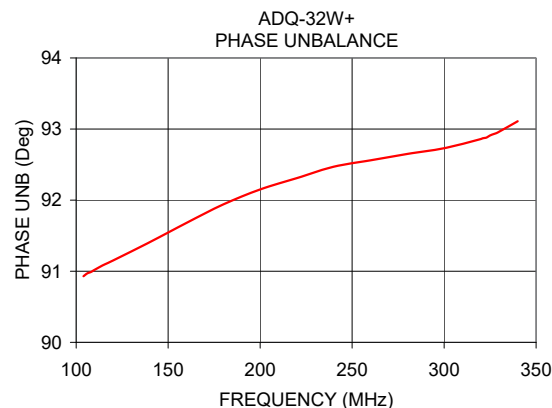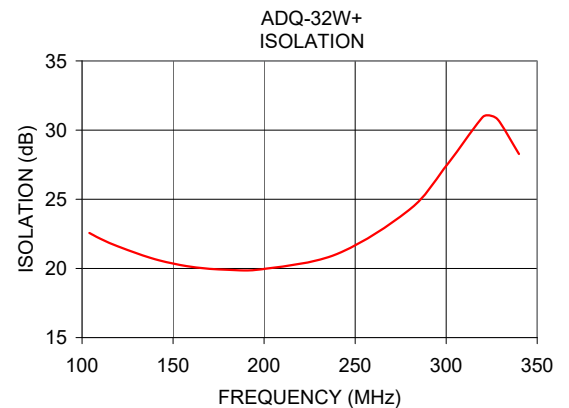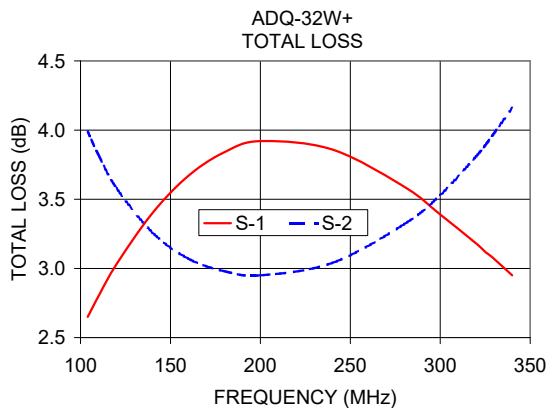

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[ADQ-32W+](#)