
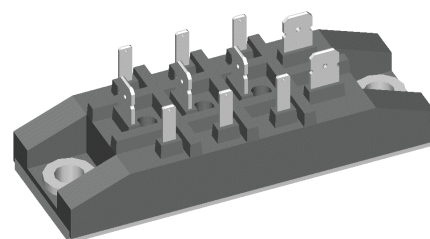


Three Phase Rectifier Bridge

$$I_{dAV} = 70 \text{ A}$$

$$V_{RRM} = 1600 \text{ V}$$

V_{RSM}	V_{RRM}	Type
V_{DSM}	V_{DRM}	
V	V	
1700	1600	VVZF 70-16io7



Symbol	Conditions	Maximum Ratings	
I_{dAV} ①	$T_C = 85^\circ\text{C}$, module	70	A
I_{dAVM} ①	module	70	A
I_{FRMS}, I_{TRMS}	per leg	36	A
I_{FSM}, I_{TSM}	$T_{VJ} = 45^\circ\text{C}; t = 10 \text{ ms}$ (50 Hz)	550	A
	$V_R = 0; t = 8.3 \text{ ms}$ (60 Hz)	600	A
	$T_{VJ} = T_{VJM}; t = 10 \text{ ms}$ (50 Hz)	500	A
	$V_R = 0; t = 8.3 \text{ ms}$ (60 Hz)	550	A
I^2t	$T_{VJ} = 45^\circ\text{C}; t = 10 \text{ ms}$ (50 Hz)	1520	A ² s
	$V_R = 0; t = 8.3 \text{ ms}$ (60 Hz)	1520	A ² s
	$T_{VJ} = T_{VJM}; t = 10 \text{ ms}$ (50 Hz)	1250	A ² s
	$V_R = 0; t = 8.3 \text{ ms}$ (60 Hz)	1250	A ² s
$(di/dt)_{cr}$	$T_{VJ} = 125^\circ\text{C}$ repetitive; $I_T = 50 \text{ A}$	150	A/ μs
	$f = 50 \text{ Hz}; t_p = 200 \mu\text{s}$		
	$V_D = \frac{2}{3} V_{DRM}$ non repetitive; $I_T = \frac{1}{2} I_{dAV}$	500	A/ μs
	$I_G = 0.3 \text{ A}$		
	$di_G/dt = 0.3 \text{ A}/\mu\text{s}$		
$(dv/dt)_{cr}$	$T_{VJ} = T_{VJM}; V_D = \frac{2}{3} V_{DRM}$	1000	V/ μs
	$R_{GK} = \infty$, method 1 (linear voltage rise)		
V_{RGM}		10	V
P_{GM}	$T_{VJ} = T_{VJM}$ $t_p = 30 \mu\text{s}$	10	W
	$I_T = I_{TAVM}$ $t_p = 500 \mu\text{s}$	5	W
	$t_p = 10 \mu\text{s}$	1	W
P_{GAVM}		0.5	W
T_{VJ}		-40...+125	$^\circ\text{C}$
T_{VJM}		125	$^\circ\text{C}$
T_{stg}		-40...+125	$^\circ\text{C}$
V_{ISOL}	50/60 Hz, RMS $t = 1 \text{ min}$	2500	V~
	$I_{ISOL} \leq 1 \text{ mA}$ $t = 1 \text{ s}$	3000	V~
M_d	Mounting torque (M5)	5 $\pm$ 15%	Nm
	(10-32 UNF)	44 $\pm$ 15%	lb.in.
Weight	Typ.	100	g

Features

- Package with copper base plate
- Isolation voltage 3000 V~
- Planar passivated chips
- Low forward voltage drop
- 1/4" fast-on power terminals

Applications

- Supplies for DC power equipment
- Input rectifiers for PWM inverter
- Battery DC power supplies
- Field supply for DC motors

Advantages

- Easy to mount with two screw
- Space and weight savings
- Improved temperature & power cycling capability
- Small and light weight

Data according to IEC 60747 and refer to a single diode unless otherwise stated.


Disclaimer Notice

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.


IXYS reserves the right to change limits, test conditions and dimensions.

20200117c

Symbol	Conditions	Characteristic Values		
$I_D; I_R$	$V_R = V_{RRM}; V_D = V_{DRM}$	$T_{VJ} = T_{VJM}$	$\leq$	5 mA
V_T	$I_T = 80$ A	$T_{VJ} = 25^\circ\text{C}$	$\leq$	1.64 V
V_{T0}	For power-loss calculations only			0.85 V
r_t				11 m Ω
V_{GT}	$V_D = 6$ V	$T_{VJ} = 25^\circ\text{C}$	$\leq$	1.5 V
		$T_{VJ} = -40^\circ\text{C}$	$\leq$	1.6 V
I_{GT}	$V_D = 6$ V	$T_{VJ} = 25^\circ\text{C}$	$\leq$	100 mA
		$T_{VJ} = -40^\circ\text{C}$	$\leq$	200 mA
V_{GD}	$V_D = \frac{2}{3}V_{DRM}$	$T_{VJ} = T_{VJM}$	$\leq$	0.2 V
I_{GD}			$\leq$	5 mA
I_L	$t_p = 10$ μs $I_G = 0.45$ A; $di_G/dt = 0.45$ A/ μs	$T_{VJ} = 25^\circ\text{C}$	$\leq$	450 mA
I_H	$V_D = 6$ V; $R_{GK} = \infty$	$T_{VJ} = 25^\circ\text{C}$	$\leq$	200 mA
t_{gd}	$V_D = \frac{1}{2}V_{DRM}$ $I_G = 0.45$ A; $di_G/dt = 0.45$ A/ μs	$T_{VJ} = 25^\circ\text{C}$	$\leq$	2 μs
t_q	$I_T = 20$ A; $t_p = 200$ μs $V_R = 100$ V; $di/dt = -10$ A/ μs $dv/dt = -15$ V/ μs ; $V_D = \frac{2}{3}V_{DRM}$	$T_{VJ} = 25^\circ\text{C}$	$\leq$	250 μs
R_{thJC}	per thyristor / diode; DC			0.9 K/W
	per module			0.15 K/W
R_{thJH}	per thyristor / diode; DC			1.1 K/W
	per module			0.157 K/W
d_s	Creeping distance on surface			16.1 mm
d_A	Creepage distance in air			7.5 mm
a	Max. allowable acceleration			50 m/s ²

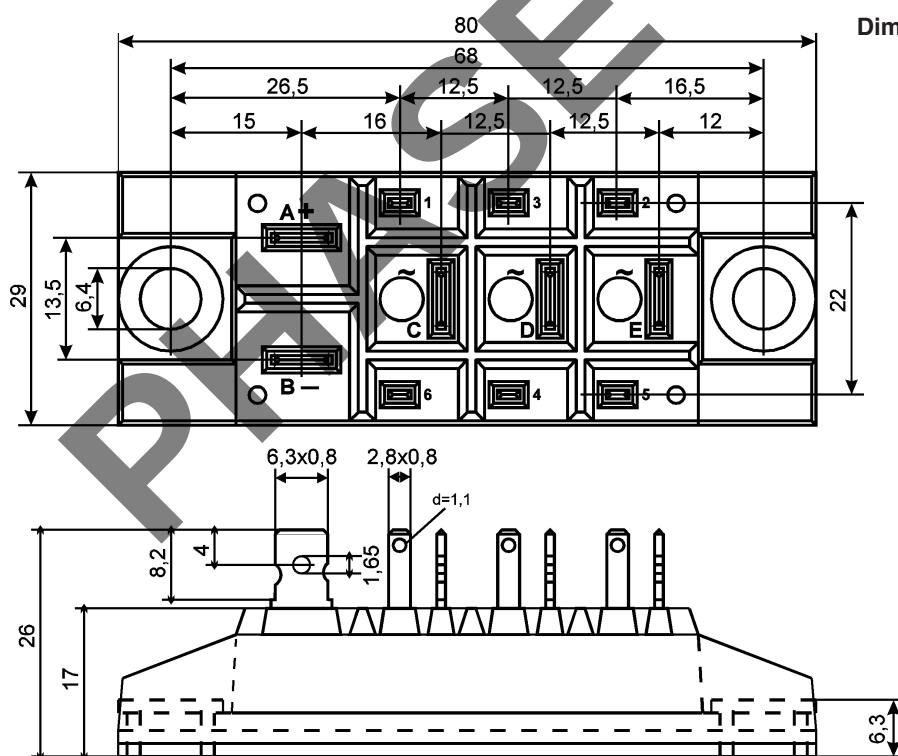

Dimensions in mm (1 mm = 0.0394")



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[IXYS:](#)

[VVZF70-16io7](#)