

# PTS840 Series

## Microminiature SMT Side Actuated



### Features/Benefits

- 3.5 x 3.55 mm footprint
- Front PIP leads option for strong shear resistance
- ESD pin option
- Reduced footprint

### Typical Applications

- Nomad devices
- Remote controls
- Personal health diagnostics
- Consumer electronics

### Specifications

FUNCTION: momentary action  
 CONTACT ARRANGEMENT: 1 make contact = SPST N.O.  
 TERMINALS: G and front PIP types for SMT  
 TRAVEL: 0.2mm + 0.2mm / -0.1 mm  
 LIFE: 100,000 cycles

Type	Operating Force (gf)	SMT Leads	Pegs
<b>Without ground pin</b>			
PTS840 GM SMTR LFS	160 -40/+70	G leads	No
PTS840 GK SMTR LFS	220 -70/+80	G leads	No
PTS840 PM SMTR LFS	160 -40/+70	P leads	No
PTS840 PK SMTR LFS	220 -70/+80	P leads	No
PTS840 GMP SMTR LFS	160 -40/+70	G leads	Yes
PTS840 GKP SMTR LFS	220 -70/+80	G leads	Yes
<b>With ground pin</b>			
PTS840 ESDGM SMTR LFS	160 -40/+70	G leads	No
PTS840 ESDGK SMTR LFS	220 -70/+80	G leads	No
PTS840 ESDPM SMTR LFS	160 -40/+70	P leads	No
PTS840 ESDPK SMTR LFS	220 -70/+80	P leads	No
PTS840 ESDGMP SMTR LFS	160 -40/+70	G leads	Yes
PTS840 ESDGKP SMTR LFS	220 -70/+80	G leads	Yes

### Electrical

MAXIMUM VOLTAGE: 12 VDC  
 MAXIMUM CURRENT DC: 50 mA  
 DIELECTRIC STRENGTH: 250 VA C (1mn)  
 CONTACT RESISTANCE: ≤ 500 mΩ  
 INSULATION RESISTANCE: ≥ 100 MΩ  
 BOUNCE TIME: ≤ 10 ms

### Environmental

OPERATING TEMPERATURE: -40°C to 85°C

### Process

SOLDERING: This component is suited to the following methods:  
 Infrared Reflow Soldering in accordance with IEC61760-1

### Packaging

In reels of 3,500 pieces  
 Dimensions of reels according to EIA 481B  
 External diameter 330 mm


#### NOTE:

- Specifications listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.
- The PTS series is not certified for using in Automotive application and no PPAP. However, in the case of some automotive accessories and specific applications for 2 and 3 wheeled vehicles the PTS is widely used and very suitable. Please contact your local C&K representative to discuss your application and the best switch solution.

### How To Order

Our easy build-a-switch concept allows you to mix and match options to create the switch you need. To order, select desired option from each category and place it in the appropriate box.

For any part number different from those listed above, please consult your local representative.

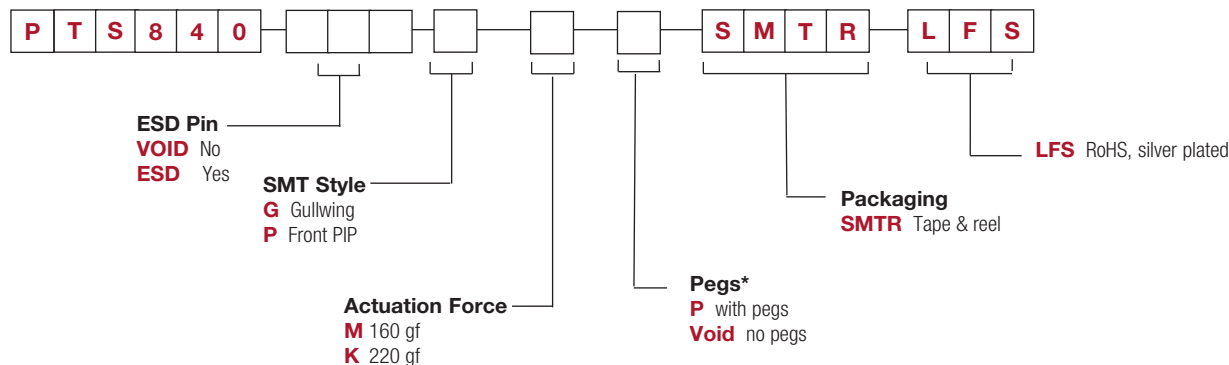


#### Design Recommendations

- "P" leads are recommended for applications where shear resistance is of importance
- When a precise alignment between application button and the switch is requested, version with pegs are the right choice to limit the possible floating of the switch during solderability.




# PTS840 Series Microminiature SMT Side Actuated

## Standard G SMT Leads with ESD and Peg options

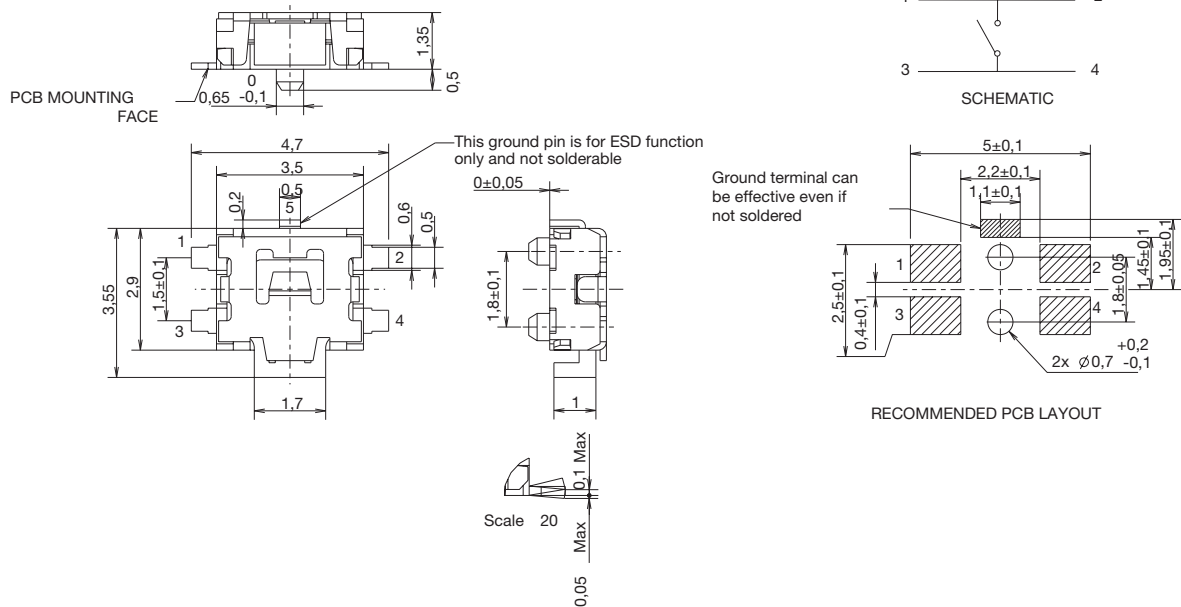


## P SMT Leads with ESD option

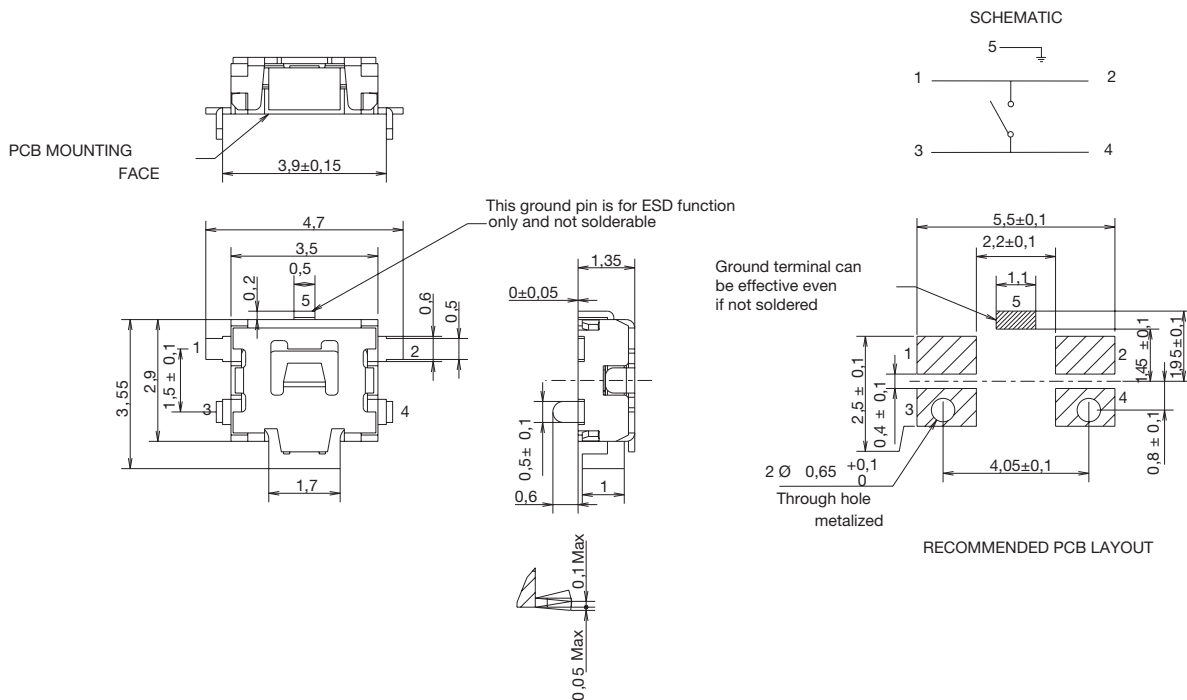

# PTS840 Series Microminiature SMT Side Actuated

## TAPE & REEL

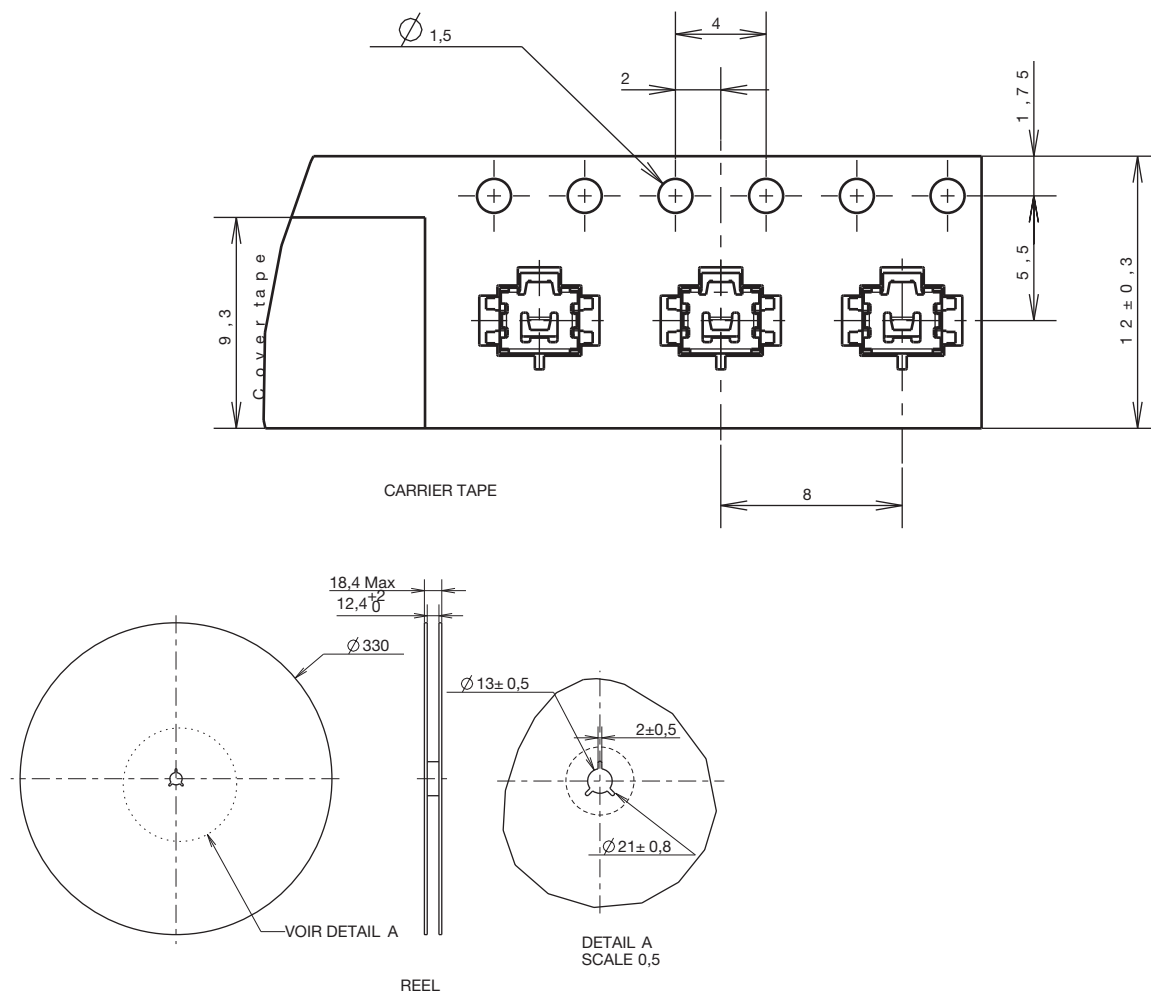

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## C&K Switches:

[PTS840GMSMTRLFS](#) [PTS840ESDGKSMTRLFS](#) [PTS840PKSMTRLFS](#) [PTS840GMPSMTRLFS](#)  
[PTS840GKPSMTRLFS](#) [PTS840ESDGMSMTRLFS](#) [PTS840PMSMTRLFS](#) [PTS840ESDPMSMTRLFS](#)  
[PTS840GKSMTRLFS](#) [PTS840ESDPKSMTRLFS](#) [PTS840ESDGMPSMTRLFS](#) [PTS840ESDGKPSMTRLFS](#)  
[PTS840GMSMTR LFS](#) [PTS840GKPSMTR LFS](#) [PTS840ESDPKSMTR LFS](#) [PTS840PKSMTR LFS](#)  
[PTS840ESDGMPSMTR LFS](#) [PTS840GMPSMTR LFS](#) [PTS840GKSMTR LFS](#) [PTS840ESDPMSMTR LFS](#)  
[PTS840PMSMTR LFS](#)