


TMC2660-PA BOB Description

Document Revision V1.00 • 2017-Oct-19

Module Top View

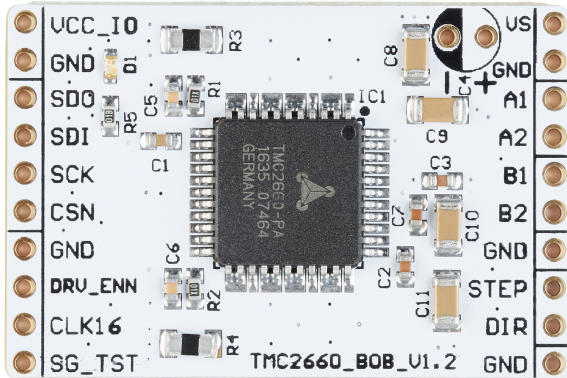

Features and additional Resources

- TMC2660-PA stepper power driver
- Supply voltage 9-28V, $I_{phase,RMS}$ up to 2.0A
- Config via SPI, control via step/direction
- Optional electrolyte cap at supply rail
- Optional cooling from bottom side
- Board width 1.5", board height 1.0"
- 2x10 pin 0.1" header rows for pins/connectors
- Link to [additional information and IC data sheet](#)
- Link to [evaluation kit](#)


Pin List

Left	Signal	Right	Signal
1	VCC_IO (3.3V or 5V)	11	VS
2	GND	12	GND
3	SDO (data out)	13	OA1
4	SDI (data in)	14	OA2
5	SCK (up to 6MHz with external CLK)	15	OB1
6	CSN (active low)	16	OB2
7	GND	17	GND
8	DRV_ENN (active low)	18	STEP
9	CLK16 (pull to GND for internal CLK)	19	DIR
10	SG_TST (see datasheet)	20	GND

Bill of Materials

Pcs.	MPN	Value	Footprint	Description
1	MC0603X474K160CT	470nF,16V,10%	0603	Cap, Multicomp
3	MC0603F104M500CT	100nF,50V,20%	0603	Cap, Multicomp
2	MC0603B103K500C	10nF,50V,10%	0603	Cap, Multicomp
4	GRM31CC8YA106KA12L	10uF,35V,10%	1206	Cap, Murata
1	LTST-C191TBKT-5A	20mA,2.8V,465nm	0603	LED, Lite-On
1	TMC2660-PA	TMC2660-PA	PQFP44,10x10,0.8	Driver, TRINAMIC
2	MCWR06X10R0FTL	10R,1%	0603	Res, Multicomp
2	RCWE1210R100FKEA	0.10R,1W,1%	1210	SenseR
1	MC0603W060311K	1k	0603	Res, Multicomp

BOB Schematics

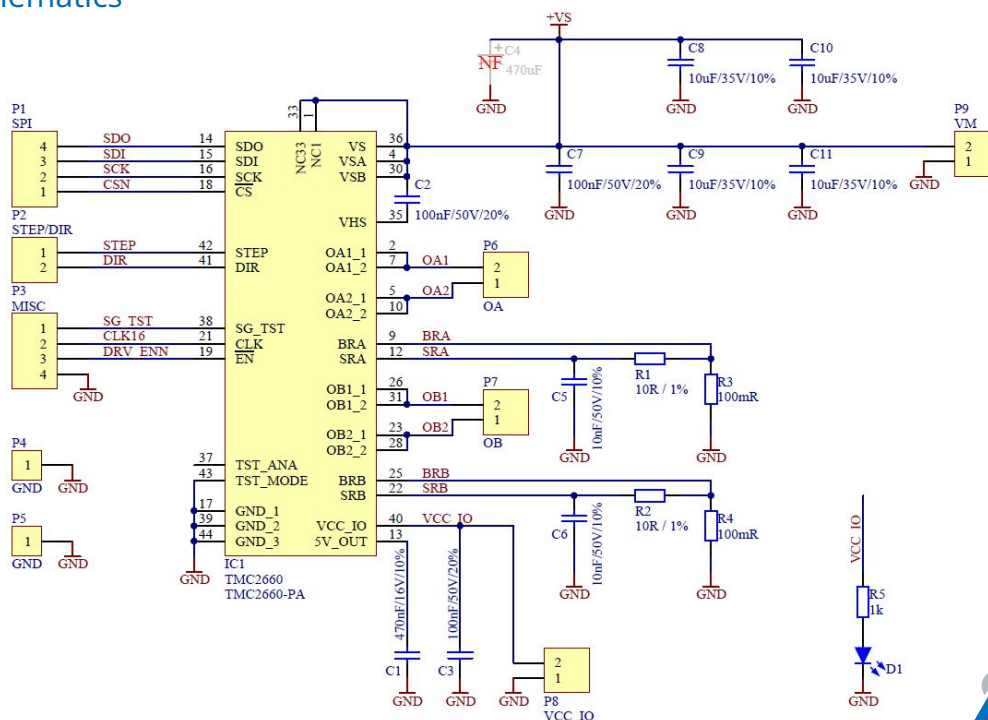

©2017 TRINAMIC Motion Control GmbH & Co. KG, Hamburg, Germany
Download newest version at: www.trinamic.com



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Trinamic:](#)

[TMC2660-BOB](#)