

Bandpass Filter

BPF-A410+

50Ω 365 to 455 MHz

Maximum Ratings



Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input*	0.5W at 25°C

*Passband rating, derate linearly to 0.25W at 100°C ambient.
Permanent damage may occur if any of these limits are exceeded.

Pin Connections

RF IN	1
RF OUT	8
GROUND	2,3,4,5,6,7,9,10,11,12,13,14

Outline Drawing



Suggested Layout
Tolerance to be within ±.002

METALLIZATION SOLDER RESIST


Outline Dimensions (inches)

A	B	C	D	E	F	G	H
.365	1.360	.35	.100	.180	.140	.100	.100
9.27	34.54	8.89	2.54	4.57	3.56	2.54	2.54


J	K	L	M	N	P	Q	Wt.
.305	.150	.120	.275	.152	.405	1.400	grams
7.75	3.81	3.05	6.99	3.86	10.29	35.56	4.0

Note: Please refer to case style drawing for details

Demo Board MCL P/N: TB-363+ Suggested PCB Layout (PL-227)

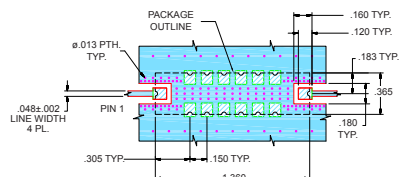

NOTES: 1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS: .0025 ± .0002" COPPER: 1/2 OZ EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

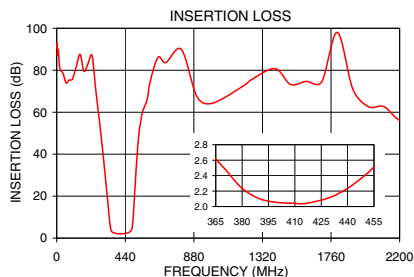

Features

- Linear phase, up to ±8 deg typ @ Fc ± 45 MHz
- High rejection
- Shielded case
- Aqueous washable


Applications

- Military communications
- Harmonic rejection
- Transmitters/receivers


Bandpass Filter Electrical Specifications (T_{AMB} = 25°C)

CENTER FREQ. (MHz)	PASSBAND (MHz) (Loss < 4dB)	STOPBANDS (MHz)				MAXIMUM DEVIATION FROM LINEAR PHASE (deg.)	VSWR (:1)		
		Loss > 20dB		Loss > 40dB			Passband		Stopband
		F3	F4	F5	F6		Typ.	Max.	Typ.
Fc	F1 - F2					Fc ± 45MHz			
410	365 - 455	300	515	275	535-2200	±15	1.5	1.9	20

Typical Frequency Response


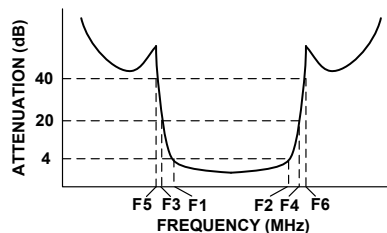


Functional Schematic

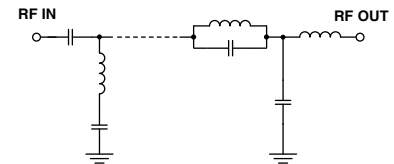

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Deviation from Linear Phase (deg.)
0.5	91.09	366.11	365.0	8.48
275	55.04	52.96	370.0	4.11
300	37.87	32.29	375.0	1.57
320	23.09	17.31	380.0	-0.69
330	15.36	6.44	390.0	-2.91
340	7.64	4.00	395.0	-3.16
365	2.61	1.54	400.0	-2.97
380	2.24	1.28	405.0	-2.41
410	2.04	1.24	410.0	-1.63
430	2.12	1.26	415.0	-0.66
455	2.51	1.26	419.0	0.19
485	5.28	1.36	425.0	1.41
490	9.11	2.80	430.0	2.18
495	15.26	3.43	435.0	2.48
515	38.52	13.23	440.0	2.14
535	53.84	15.14	445.0	0.99
1000	64.28	30.17	450.0	-1.06
2200	56.09	27.88	455.0	-4.08

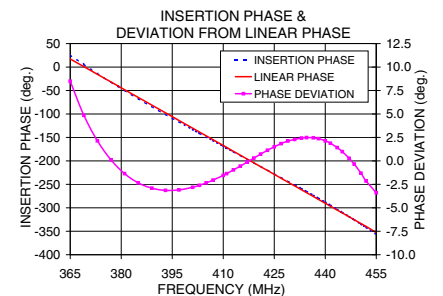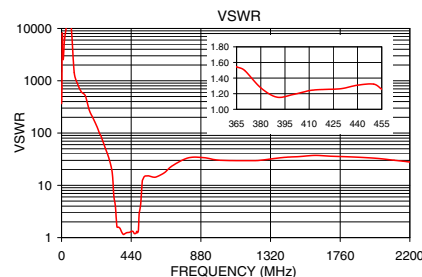

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com



Generic photo used for illustration purposes only

CASE STYLE: HQ1157

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[BPF-A410+](#)