

Bandpass Filter

50Ω 47 to 49 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.15W Max.
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

INPUT	1
OUTPUT	2
GROUND	3, 4, 5, 6

Outline Drawing

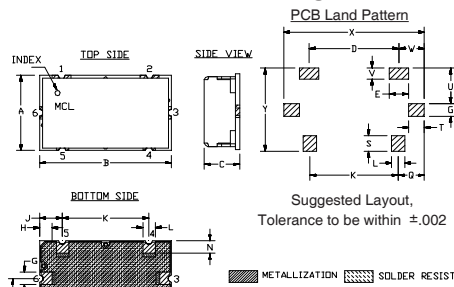


Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M
.472"	.826"	.220"	.551"	.118"	.047"	.078"	.142"	.543"	.078"	.236"	
11.99	20.98	5.59	14.00	3.00	1.19	1.98	3.61	13.79	1.98	5.99	
N	P	Q	S	T	U	V	W	X	Y	wt	
.079"	.138"	.162"	.098"	.096"	.217"	.067"	.157"	.866"	.512"	grams	
2.01	3.51	4.11	2.49	2.44	5.51	1.70	3.99	22.00	13.00	6.0	




Note: Please refer to case style drawing for details

Demo Board MCL P/N: TB-400+ Suggested PCB Layout (PL-247)

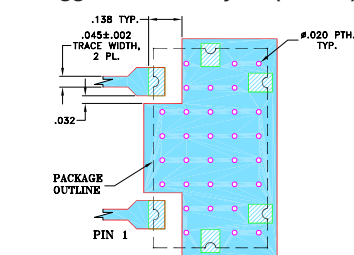

NOTES:

- TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .025" ± .002". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDERMASK

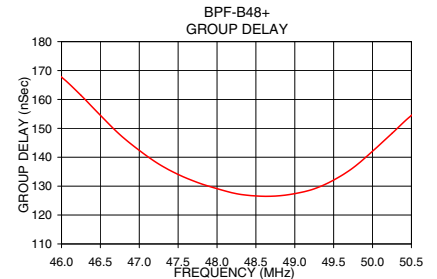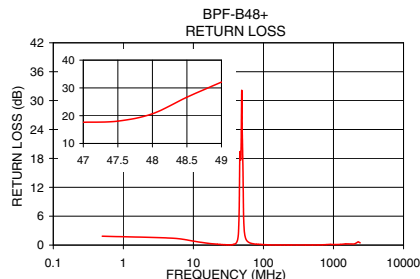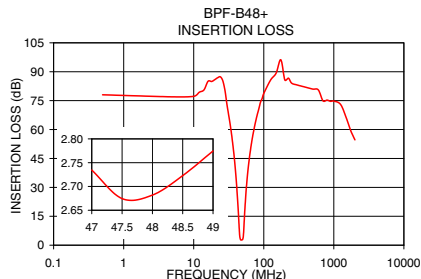

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Features

- High rejection
- Good VSWR, 1.2:1 typ @ passband
- Shielded case
- Aqueous washable

Applications

- Military
- Lab
- Harmonic rejection
- Transmitters/receivers

BPF-B48+



Generic photo used for illustration purposes only

CASE STYLE: HZ1198


+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Bandpass Filter Electrical Specifications (T_{AMB} = 25°C)

CENTER FREQ. (MHz)	PASSBAND (MHz) (Loss < 4dB)	STOPBANDS (MHz)				VSWR (:1)		
		Loss > 20dB		Loss > 40dB		Passband		Stopband
F _c	F ₁ - F ₂	F ₃	F ₄	F ₅	F ₆	Typ.	Max.	Typ.
48	47 - 49	41	56	37	64 - 2400	1.2	1.5	20

Typical Frequency Response

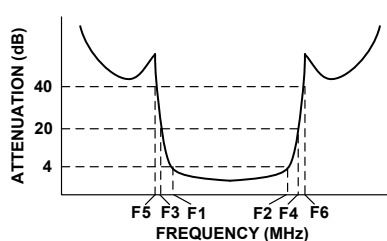

Functional Schematic

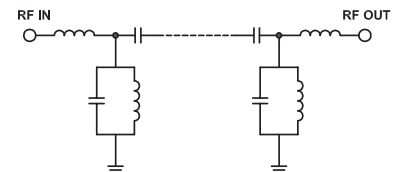

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
	$\bar{x}$	σ			
0.5	78.03	4.46	1.85	46.00	167.71
37.0	49.10	0.39	0.12	46.25	161.42
41.0	30.99	0.52	0.47	46.50	154.52
44.0	12.42	0.63	2.64	47.00	142.38
45.0	6.45	0.44	6.93	47.25	137.66
46.0	3.43	0.15	19.20	47.50	134.06
47.0	2.73	0.03	17.62	47.75	131.25
47.5	2.67	0.02	18.05	48.00	129.14
48.0	2.68	0.02	20.70	48.25	127.37
48.5	2.72	0.03	26.66	48.50	126.62
49.0	2.77	0.03	32.10	48.75	126.57
51.0	4.54	0.37	15.56	49.00	127.40
52.0	9.10	0.73	6.47	49.25	129.07
53.0	14.81	0.76	3.42	49.50	132.10
56.0	28.44	0.55	1.32	49.75	136.34
64.0	48.44	0.36	0.45	50.00	142.10
500.0	80.99	2.23	0.03	50.25	148.26
2400.0	47.70	0.53	0.47	50.50	154.45

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[BPF-B48+](#)