

Surface Mount Bandpass Filter

50Ω 400 to 510 MHz

BPF-C450+



Generic photo used for illustration purposes only
CASE STYLE: HU1186


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	0.5W Max.
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

INPUT	2
OUTPUT	9
NOT CONNECTED	6, 13
GROUND	1, 3, 4, 5, 7, 8, 10, 11, 12, 14

Outline Drawing

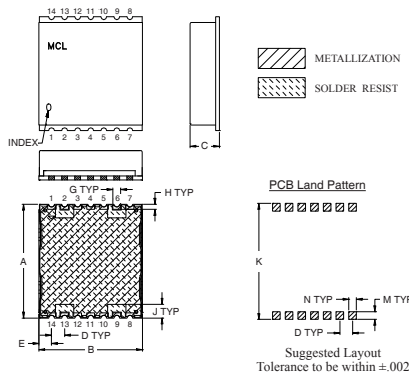


Outline Dimensions (inch/mm)

	A	B	C	D	E	G	H	J	K	M	N	wt.
	.870	.800	.25	.100	.097	.060	.040	.105	.910	.060	.060	grams
	22.10	20.32	6.35	2.54	2.46	1.52	1.02	2.67	23.11	1.52	1.52	2.85

Note: Please refer to case style drawing for details

Demo Board MCL P/N: TB-500+ Suggested PCB Layout (PL-294)

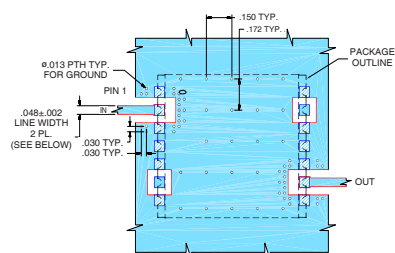

NOTES:

- TRACE WIDTH IS SHOWN FOR ROGERS RO4350B, DIELECTRIC THICKNESS: .030"±.002"; COPPER: 1/2 OZ EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- Good VSWR, 1.3:1 typ @ passband
- High rejection
- Shielded case
- Aqueous washable


Applications

- Military and avionics
- Receivers / transmitters
- Harmonic rejection


Bandpass Filter Electrical Specifications (T_{AMB} = 25°C)

CENTER FREQ. (MHz)	PASSBAND (MHz) (Loss < 2dB)	STOPBANDS (MHz)				VSWR (:1)		
		Loss > 20dB		Loss > 40dB		Passband		Stopband
F _c	F ₁ - F ₂	F ₃	F ₄	F ₅	F ₆	Typ.	Max.	Typ.
450	400 - 510	310	700	150	760 - 1200	1.3	1.7	18

Typical Frequency Response



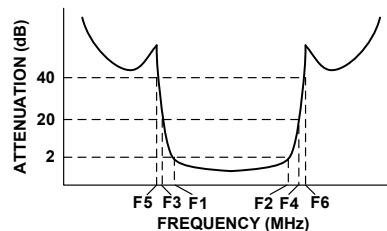


Functional Schematic

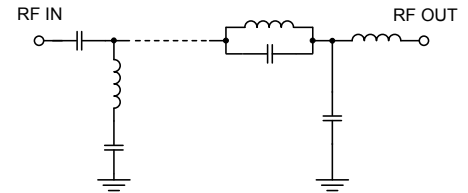

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)		Return Loss (dB)	Frequency (MHz)	Group Delay (nSec)
	$\bar{x}$	σ			
0.5	92.65	1.56	0.01	400.0	6.13
150.0	50.75	0.54	0.31	410.0	5.66
310.0	35.49	5.18	0.84	415.0	5.49
340.0	10.85	1.26	1.78	420.0	5.36
355.0	4.37	0.28	4.74	425.0	5.22
365.0	2.16	0.06	7.97	430.0	5.11
400.0	0.86	0.03	20.46	435.0	5.03
430.0	0.81	0.03	16.97	440.0	4.93
450.0	0.81	0.03	17.12	445.0	4.87
470.0	0.80	0.03	20.27	448.0	4.85
510.0	0.80	0.03	25.18	450.0	4.83
580.0	1.48	0.26	18.15	455.0	4.81
610.0	3.03	1.32	5.80	460.0	4.80
625.0	6.05	2.32	2.01	465.0	4.81
640.0	11.26	2.70	0.94	470.0	4.82
700.0	32.58	2.46	0.33	480.0	4.80
760.0	53.15	4.33	0.21	500.0	4.91
1200.0	51.38	2.35	0.39	510.0	4.99

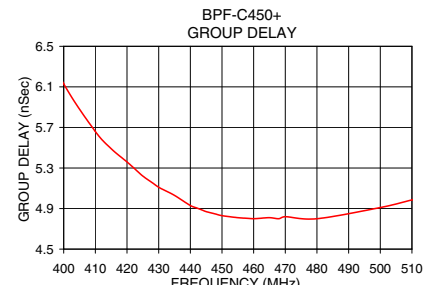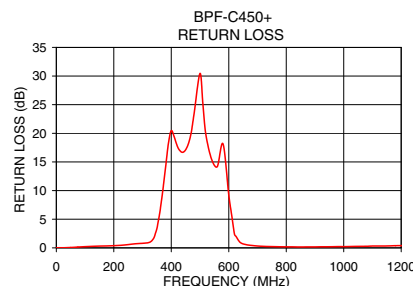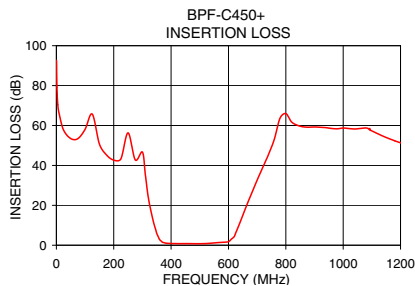

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. B
M174392
EDR-9335UF1
BPF-C450+
URJ/RAV
190817
Page 1 of 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[BPF-C450+](#)