

Ceramic Bandpass Filter

50Ω 2400 to 2500 MHz

BPGE-252R+



Generic photo used for illustration purposes only

CASE STYLE: GE0805C-3

Features

- Miniature size 0805 (0.079" [2.0mm] x 0.049" [1.25mm] x 0.037" [0.95mm])
- High rejection
- Low cost
- Aqueous washable


+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Applications

- ISM Band
- WLAN
- Bluetooth
- Zigbee

Functional Schematic



Electrical Specifications¹ at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Center Frequency	—	—	2450	—	dB
	Insertion Loss	F2 - F4	—	1.3	1.8	dB
	VSWR	F2 - F4	—	—	2	:1
Stop Band, Lower	Rejection	DC - F1	25	42	—	dB
		F3	10	14	—	dB
Stop Band, Upper	Rejection	F4	12	18	—	dB
		F5 - F6	30	43	—	dB
		F7 - F8	32	37	—	dB

1. Tested on Evaluation Board TB-1022+.

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature ²	-40°C to 100°C
RF Power Input ³	2W at 25°C

2. Refer to product storage temperature after installation

Suggestion for T&R unused product storage condition:





+5 ~ +35 °C, Humidity 45~75%RH, 12 month Max

3. Derate linearly to 1W at 85°C

Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1000	57.13	2151.27
1250	40.02	261.73
1500	29.61	151.83
2000	13.14	28.24
2400	1.23	1.27
2500	1.37	1.49
3000	18.50	43.41
3200	26.35	81.54
3200	26.35	81.54
3750	50.56	158.11
4000	44.80	166.76
4800	41.42	113.00
5000	41.99	105.25
5600	46.06	82.39
5800	48.64	83.85
6000	51.95	88.95

Typical Frequency Response

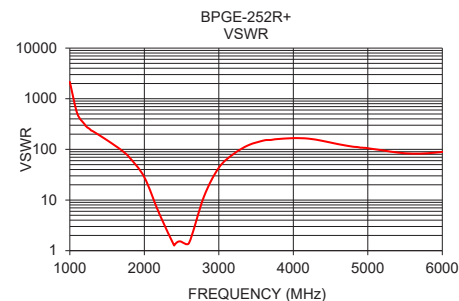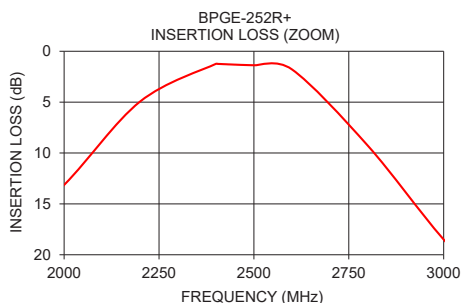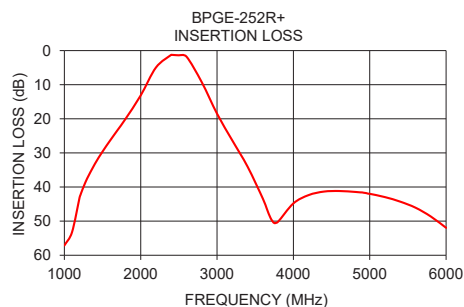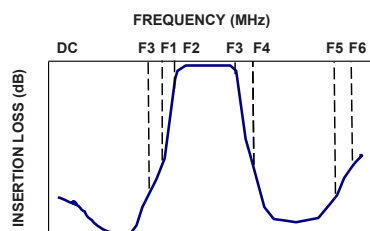

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com


REV. A
M151107
ED-15034
BPGE-252R+
SL/CP
200611
Page 1 of 2



Pad Connections

INPUT	1
OUTPUT	3
GROUND	2,4


Product Marking: N/A

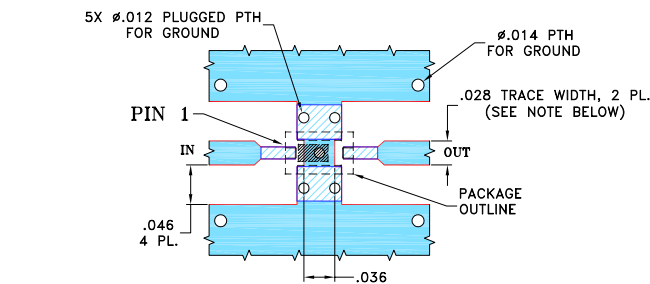Evaluation Board MCL P/N: TB-1022+
Suggested PCB Layout (PL-547)



- NOTES:
1. TRACE WIDTH IS SHOWN FOR FR4, GRADE IT-180TC (ITEQ CORP.) WITH DIELECTRIC THICKNESS .016±.0015. COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
-  DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
-  DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

Outline Drawing

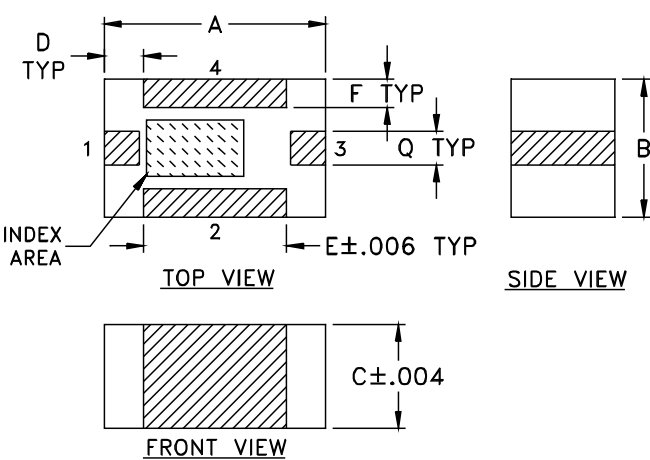

Outline Dimensions ($\frac{\text{inch}}{\text{mm}}$)

A	B	C	D	E	F	Q	wt
.079	.049	.037	.014	.051	.010	.012	grams
2.01	1.24	0.94	0.36	1.30	0.25	0.30	.020

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[BPGE-252R+](#)