

Surface Mount Band Stop Filter

BSF-C88108+

50Ω 88 to 108 MHz

The Big Deal

- High rejection, 46 dB typical
- Stopband (88 to 108 MHz)
- Miniature shielded package



CASE STYLE: HU1186

Product Overview

The BSF-C88108+ is stopband filter fabricated using SMT Technology. Covering 88 to 108 MHz stopband, this units offer good rejection. This unit uses a miniature high Q capacitors and wire welded inductors for high reliability. It has repeatable performance across production lots and consistent performance across temperature.

Key Features

Feature	Advantages
High rejection, 46 dB typical	BSF-C88108+ enables the filter to attenuate spurious signals and reject harmonics for broadband of frequencies.
Shielded package	Shielded package (Size of .087" x 0.80" x 0.25") reduced interface with and from the surrounding components.
Application	Can be used in broadcast and FM system

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Surface Mount Band Stop Filter

50Ω 88 to 108 MHz

BSF-C88108+



CASE STYLE: HU1186

Features

- High rejection, 46 dB typical
- Aqueous washable
- Miniature shielded package

Applications

- FM radio
- Broadcast system
- Lab use

Electrical Specifications at 25°C


Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band, Lower	Insertion Loss	DC-F1	DC - 66	-	0.5	1.5	dB
	VSWR	DC-F1	DC - 66	-	1.2	1.6	:1
Stop Band	Rejection	F4-F5	88 - 108	30	46	-	dB
	VSWR	F4-F5	88 - 108	-	10	-	:1
Pass Band, Upper	Insertion Loss	F2-F3	142-1300	-	0.7	1.5	dB
	VSWR	F2-F3	142-1300	-	1.2	1.6	:1

Maximum Ratings


Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input	250 mW max.

Permanent damage may occur if any of these limits are exceeded.

Functional Schematic

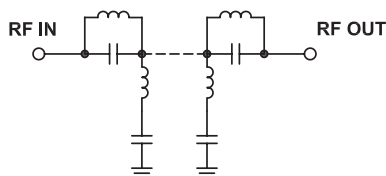

Typical Frequency Response

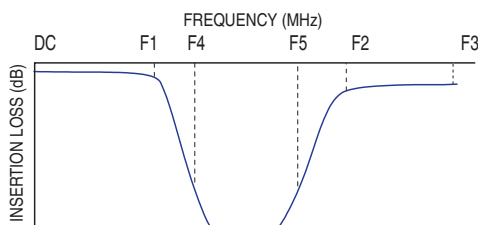


Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1	0.03	1.01
40	0.17	1.21
66	0.49	1.10
75	1.45	1.06
78	4.44	2.61
80	11.00	6.53
82	20.32	11.53
84	31.75	15.39
88	54.77	20.45
97	56.92	9.90
100	55.83	24.83
108	52.30	21.73
114	29.06	13.60
118	13.74	7.00
120	8.24	4.09
124	2.67	1.44
142	0.64	1.03
500	0.19	1.04
1000	0.29	1.08
1300	0.39	1.08


+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

BSF-C88108+
INSERTION LOSS

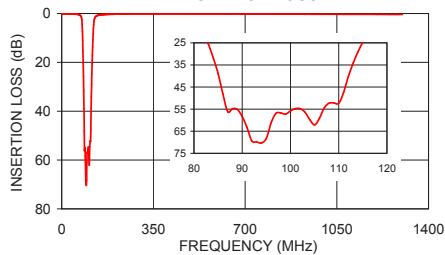

BSF-C88108+
VSWR

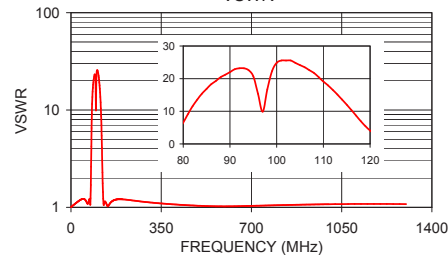

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp




www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M160153
BSF-C88108+
EDU1282
URJ/NY
161230
Page 2 of 3


Pin Connections

INPUT	2
OUTPUT	13
NOT CONNECTED	6,9
GROUND	1,3,4,5,7,8,10,11,12,14


Demo Board MCL P/N: TB-378
Suggested PCB Layout (PL-347)

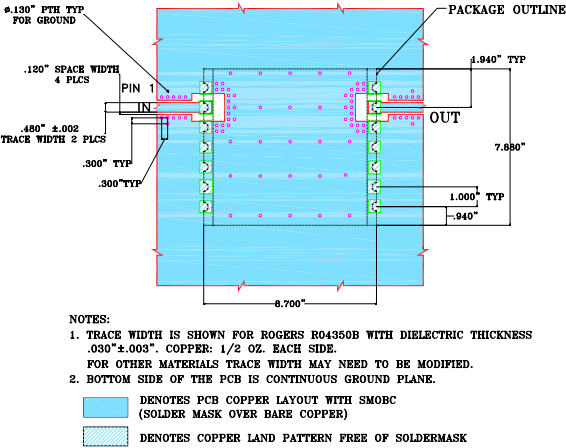

Outline Drawing

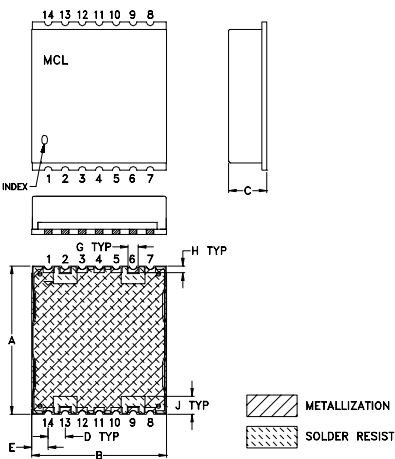

PCB Land Pattern

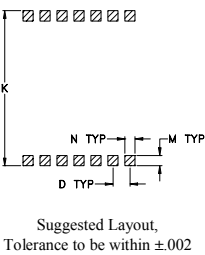

Outline Dimensions (inch)

A	B	C	D	E	F	G	H
.870	.800	.25	.100	.097	--	.060	.040
22.10	20.32	6.35	2.54	2.46	--	1.52	1.02
J	K	L	M	N	P		wt
.105	.910	--	.060	.060	--		grams
2.67	23.11	--	1.52	1.52	--		2.85

Notes
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[BSF-C88108+](#)