
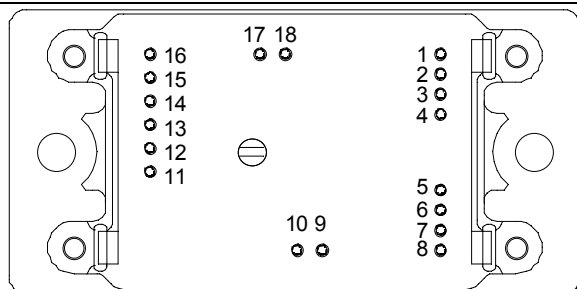


Phase leg Super Junction MOSFET Power Module

$$V_{DSS} = 600V$$

$$R_{DSon} = 24m\Omega \text{ max @ } T_j = 25^\circ C$$

$$I_D = 95A \text{ @ } T_c = 25^\circ C$$

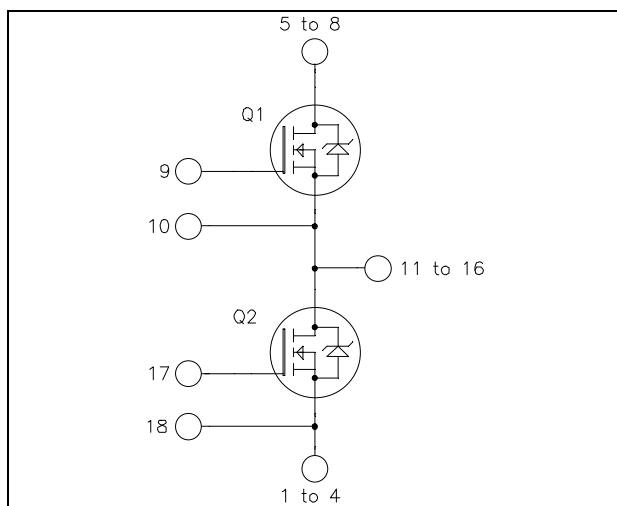

Pins 1/2/3/4 ; 5/6/7/8 ; 11/12/13/14/15/16
must be shorted together

Application

- Welding converters
- Switched Mode Power Supplies
- Uninterruptible Power Supplies
- Motor control

Features

- CoolMOST™
 - Ultra low R_{DSon}
 - Low Miller capacitance
 - Ultra low gate charge
 - Avalanche energy rated
 - Very rugged
- Very low stray inductance
- Kelvin source for easy drive
- High level of integration

Benefits

- Outstanding performance at high frequency operation
- Direct mounting to heatsink (isolated package)
- Low junction to case thermal resistance
- Low profile
- RoHS Compliant

All ratings @ $T_j = 25^\circ C$ unless otherwise specified

Absolute maximum ratings

Symbol	Parameter	Max ratings	Unit
V_{DSS}	Drain - Source Breakdown Voltage	600	V
I_D	Continuous Drain Current	$T_c = 25^\circ C$	95
		$T_c = 80^\circ C$	70
I_{DM}	Pulsed Drain current	260	A
V_{GS}	Gate - Source Voltage	± 20	V
R_{DSon}	Drain - Source ON Resistance	24	$m\Omega$
P_D	Maximum Power Dissipation	$T_c = 25^\circ C$	462
I_{AR}	Avalanche current (repetitive and non repetitive)	15	A
E_{AR}	Repetitive Avalanche Energy	3	mJ
E_{AS}	Single Pulse Avalanche Energy	1900	

CAUTION: These Devices are sensitive to Electrostatic Discharge. Proper Handling Procedures Should Be Followed. See application note APT0502 on www.microsemi.com

Electrical Characteristics

Symbol	Characteristic	Test Conditions	Min	Typ	Max	Unit
I_{DSS}	Zero Gate Voltage Drain Current	$V_{GS} = 0V, V_{DS} = 600V$			350	μA
$R_{DS(on)}$	Drain – Source on Resistance	$V_{GS} = 10V, I_D = 47.5A$			24	m Ω
$V_{GS(th)}$	Gate Threshold Voltage	$V_{GS} = V_{DS}, I_D = 5mA$	2.1	3	3.9	V
I_{GSS}	Gate – Source Leakage Current	$V_{GS} = \pm 20V, V_{DS} = 0V$			200	nA

Dynamic Characteristics

Symbol	Characteristic	Test Conditions	Min	Typ	Max	Unit
C_{iss}	Input Capacitance	$V_{GS} = 0V; V_{DS} = 25V$		14.4		nF
C_{oss}	Output Capacitance	$f = 1MHz$		17		
Q_g	Total gate Charge	$V_{GS} = 10V$ $V_{Bus} = 300V$ $I_D = 95A$		300		nC
Q_{gs}	Gate – Source Charge			68		
Q_{gd}	Gate – Drain Charge			102		
$T_{d(on)}$	Turn-on Delay Time	Inductive Switching (125°C) $V_{GS} = 10V$ $V_{Bus} = 400V$ $I_D = 95A$ $R_G = 2.5\Omega$		21		ns
T_r	Rise Time			30		
$T_{d(off)}$	Turn-off Delay Time			100		
T_f	Fall Time			45		
E_{off}	Turn-off Switching Energy	Inductive switching $V_{GS} = 10V; V_{Bus} = 400V$ $I_D = 95A; R_G = 2.5\Omega$	$T_j = 25^\circ C$	1040		μJ
			$T_j = 125^\circ C$	1270		
R_{thJC}	Junction to Case Thermal Resistance				0.27	$^\circ C/W$

Source - Drain diode ratings and characteristics

Symbol	Characteristic	Test Conditions	Min	Typ	Max	Unit
I_S	Continuous Source current (Body diode)	$T_c = 25^\circ C$		95		A
		$T_c = 80^\circ C$		70		
V_{SD}	Diode Forward Voltage	$V_{GS} = 0V, I_S = -95A$			1.2	V
dv/dt	Peak Diode Recovery ❶				4	V/ns
t_{rr}	Reverse Recovery Time	$I_S = -95A$ $V_R = 350V$	$T_j = 25^\circ C$	600		ns
Q_{rr}	Reverse Recovery Charge	$di_S/dt = 200A/\mu s$	$T_j = 25^\circ C$	34		μC

❶ dv/dt numbers reflect the limitations of the circuit rather than the device itself.

$$I_S \leq -95A \quad di/dt \leq 200A/\mu s \quad V_R \leq V_{DSS} \quad T_j \leq 150^\circ C$$

Thermal and package characteristics

Symbol	Characteristic			Min	Typ	Max	Unit
V _{ISOL}	RMS Isolation Voltage, any terminal to case t =1 min, 50/60Hz			4000			V
T _J	Operating junction temperature range			-40		150	°C
T _{STG}	Storage Temperature Range			-40		125	
T _C	Operating Case Temperature			-40		100	
Torque	Mounting torque	To heatsink	M4	2		3	N.m
Wt	Package Weight					75	g



Technical drawing of a mechanical part, showing three views: Top View, Front View, and Side View. The drawing includes dimensions and tolerances for various features.

Top View Dimensions:

- Overall Width: 66 ± 1
- Overall Height: 51 ± 0.2
- Distance from top edge to center line: 16.75 ± 0.50
- Distance from left edge to center line: 16.75 ± 0.50
- Distance from bottom edge to center line: 16.75 ± 0.50
- Distance from right edge to center line: 16.75 ± 0.50
- Distance from left edge to first hole center: 12.70 ± 0.50
- Distance between first and second hole centers: 15.60 ± 0.50
- Distance between second and third hole centers: 18.95 ± 0.50
- Distance between third and fourth hole centers: 17.85 ± 0.50
- Distance from right edge to fourth hole center: 33.50 ± 0.50
- Overall distance from left edge to fourth hole center: 55 ± 0.20
- Distance from top edge to first hole center: 22.50 ± 0.50
- Distance from top edge to second hole center: 20.20 ± 0.50
- Distance from top edge to third hole center: 17.90 ± 0.50
- Distance from top edge to fourth hole center: 15.60 ± 0.50
- Distance from bottom edge to first hole center: 6.90 ± 0.50
- Distance from bottom edge to second hole center: 4.60 ± 0.50
- Distance from bottom edge to third hole center: 2.30 ± 0.50
- Distance from bottom edge to fourth hole center: 2.30 ± 0.50
- Distance from left edge to first hole center: 11.25 ± 0.50
- Distance from left edge to second hole center: 9 ± 0.50
- Distance from left edge to third hole center: 17.10 ± 0.50
- Distance from left edge to fourth hole center: 19.80 ± 0.50
- Distance from left edge to fifth hole center: 22.50 ± 0.50
- Distance from left edge to sixth hole center: 17.10 ± 0.50
- Distance from left edge to seventh hole center: 14.40 ± 0.50
- Distance from left edge to eighth hole center: 11.70 ± 0.50
- Distance from left edge to ninth hole center: 9 ± 0.50
- Distance from left edge to tenth hole center: 11.25 ± 0.50
- Distance from left edge to eleventh hole center: 14.40 ± 0.50
- Distance from left edge to twelfth hole center: 17.10 ± 0.50
- Distance from left edge to thirteenth hole center: 19.80 ± 0.50
- Distance from left edge to fourteenth hole center: 22.50 ± 0.50
- Distance from left edge to fifteenth hole center: 17.10 ± 0.50
- Distance from left edge to sixteenth hole center: 14.40 ± 0.50
- Distance from left edge to seventeenth hole center: 11.70 ± 0.50
- Distance from left edge to eighteenth hole center: 9 ± 0.50
- Distance from left edge to nineteenth hole center: 11.25 ± 0.50
- Distance from left edge to twentieth hole center: 14.40 ± 0.50
- Distance from left edge to twenty-first hole center: 17.10 ± 0.50
- Distance from left edge to twenty-second hole center: 19.80 ± 0.50
- Distance from left edge to twenty-third hole center: 22.50 ± 0.50
- Distance from left edge to twenty-fourth hole center: 17.10 ± 0.50
- Distance from left edge to twenty-fifth hole center: 14.40 ± 0.50
- Distance from left edge to twenty-sixth hole center: 11.70 ± 0.50
- Distance from left edge to twenty-seventh hole center: 9 ± 0.50
- Distance from left edge to twenty-eighth hole center: 11.25 ± 0.50
- Distance from left edge to twenty-ninth hole center: 14.40 ± 0.50
- Distance from left edge to thirtieth hole center: 17.10 ± 0.50
- Distance from left edge to thirty-first hole center: 19.80 ± 0.50
- Distance from left edge to thirty-second hole center: 22.50 ± 0.50
- Distance from left edge to thirty-third hole center: 17.10 ± 0.50
- Distance from left edge to thirty-fourth hole center: 14.40 ± 0.50
- Distance from left edge to thirty-fifth hole center: 11.70 ± 0.50
- Distance from left edge to thirty-sixth hole center: 9 ± 0.50
- Distance from left edge to thirty-seventh hole center: 11.25 ± 0.50
- Distance from left edge to thirty-eighth hole center: 14.40 ± 0.50
- Distance from left edge to thirty-ninth hole center: 17.10 ± 0.50
- Distance from left edge to fortieth hole center: 19.80 ± 0.50
- Distance from left edge to forty-first hole center: 22.50 ± 0.50
- Distance from left edge to forty-second hole center: 17.10 ± 0.50
- Distance from left edge to forty-third hole center: 14.40 ± 0.50
- Distance from left edge to forty-fourth hole center: 11.70 ± 0.50
- Distance from left edge to forty-fifth hole center: 9 ± 0.50
- Distance from left edge to forty-sixth hole center: 11.25 ± 0.50
- Distance from left edge to forty-seventh hole center: 14.40 ± 0.50
- Distance from left edge to forty-eighth hole center: 17.10 ± 0.50
- Distance from left edge to forty-ninth hole center: 19.80 ± 0.50
- Distance from left edge to fiftieth hole center: 22.50 ± 0.50
- Distance from left edge to fifty-first hole center: 17.10 ± 0.50
- Distance from left edge to fifty-second hole center: 14.40 ± 0.50
- Distance from left edge to fifty-third hole center: 11.70 ± 0.50
- Distance from left edge to fifty-fourth hole center: 9 ± 0.50
- Distance from left edge to fifty-fifth hole center: 11.25 ± 0.50
- Distance from left edge to fifty-sixth hole center: 14.40 ± 0.50
- Distance from left edge to fifty-seventh hole center: 17.10 ± 0.50
- Distance from left edge to fifty-eighth hole center: 19.80 ± 0.50
- Distance from left edge to fifty-ninth hole center: 22.50 ± 0.50
- Distance from left edge to sixtieth hole center: 17.10 ± 0.50
- Distance from left edge to sixty-first hole center: 14.40 ± 0.50
- Distance from left edge to sixty-second hole center: 11.70 ± 0.50
- Distance from left edge to sixty-third hole center: 9 ± 0.50
- Distance from left edge to sixty-fourth hole center: 11.25 ± 0.50
- Distance from left edge to sixty-fifth hole center: 14.40 ± 0.50
- Distance from left edge to sixty-sixth hole center: 17.10 ± 0.50
- Distance from left edge to sixty-seventh hole center: 19.80 ± 0.50
- Distance from left edge to sixty-eighth hole center: 22.50 ± 0.50
- Distance from left edge to sixty-ninth hole center: 17.10 ± 0.50
- Distance from left edge to seventieth hole center: 14.40 ± 0.50
- Distance from left edge to seventy-first hole center: 11.70 ± 0.50
- Distance from left edge to seventy-second hole center: 9 ± 0.50
- Distance from left edge to seventy-third hole center: 11.25 ± 0.50
- Distance from left edge to seventy-fourth hole center: 14.40 ± 0.50
- Distance from left edge to seventy-fifth hole center: 17.10 ± 0.50
- Distance from left edge to seventy-sixth hole center: 19.80 ± 0.50
- Distance from left edge to seventy-seventh hole center: 22.50 ± 0.50
- Distance from left edge to seventy-eighth hole center: 17.10 ± 0.50
- Distance from left edge to seventy-ninth hole center: 14.40 ± 0.50
- Distance from left edge to eightyth hole center: 11.70 ± 0.50
- Distance from left edge to eighty-first hole center: 9 ± 0.50
- Distance from left edge to eighty-second hole center: 11.25 ± 0.50
- Distance from left edge to eighty-third hole center: 14.40 ± 0.50
- Distance from left edge to eighty-fourth hole center: 17.10 ± 0.50
- Distance from left edge to eighty-fifth hole center: 19.80 ± 0.50
- Distance from left edge to eighty-sixth hole center: 22.50 ± 0.50
- Distance from left edge to eighty-seventh hole center: 17.10 ± 0.50
- Distance from left edge to eighty-eighth hole center: 14.40 ± 0.50
- Distance from left edge to eighty-ninth hole center: 11.70 ± 0.50
- Distance from left edge to ninetieth hole center: 9 ± 0.50
- Distance from left edge to ninety-first hole center: 11.25 ± 0.50
- Distance from left edge to ninety-second hole center: 14.40 ± 0.50
- Distance from left edge to ninety-third hole center: 17.10 ± 0.50
- Distance from left edge to ninety-fourth hole center: 19.80 ± 0.50
- Distance from left edge to ninety-fifth hole center: 22.50 ± 0.50
- Distance from left edge to ninety-sixth hole center: 17.10 ± 0.50
- Distance from left edge to ninety-seventh hole center: 14.40 ± 0.50
- Distance from left edge to ninety-eighth hole center: 11.70 ± 0.50
- Distance from left edge to ninety-ninth hole center: 9 ± 0.50
- Distance from left edge to one hundredth hole center:





Maximum Effective Transient Thermal Impedance, Junction to Case vs Pulse Duration






Thermal Impedance ($^{\circ}\text{C}/\text{W}$)







rectangular Pulse Duration (Seconds)

Single Pulse

Note:
 P_{DM}
 t_1
 t_2
 Duty Factor $D = t_1/t_2$
 Peak $T_J = T_{DM} + Z_{thJC} \cdot T_C$

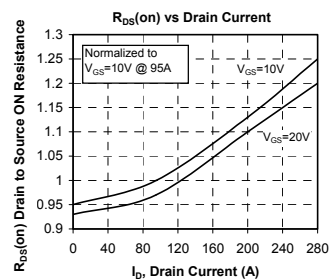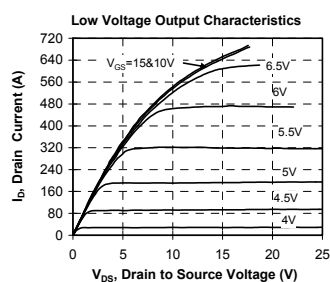

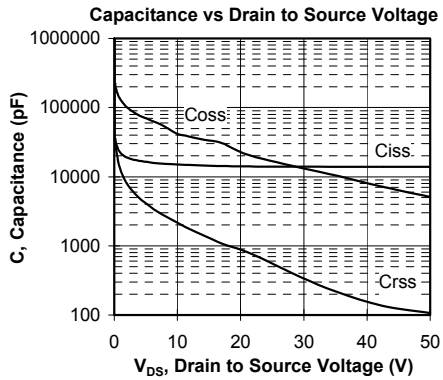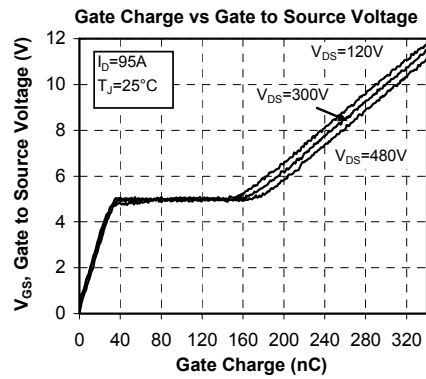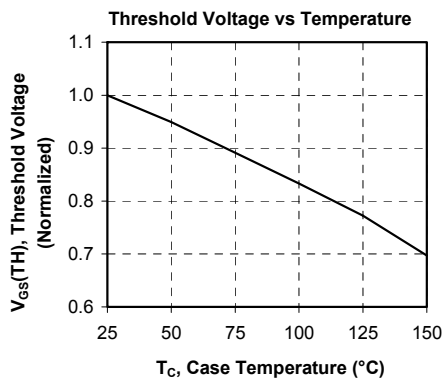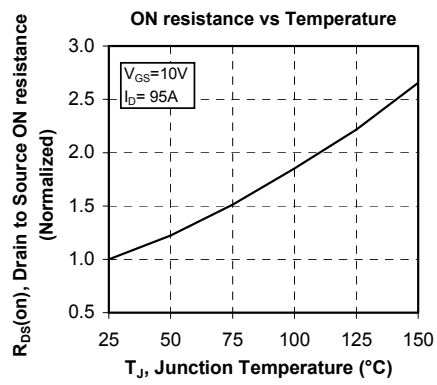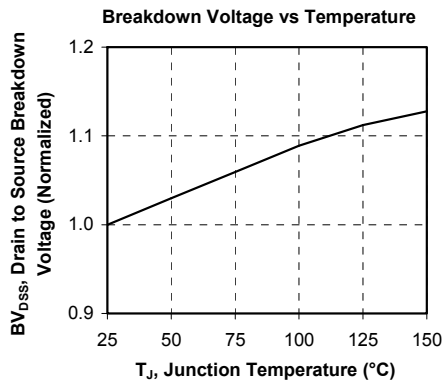

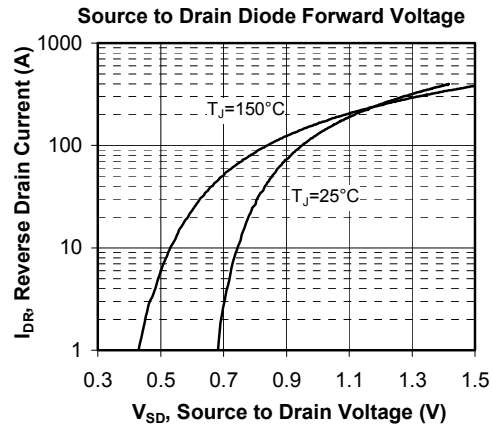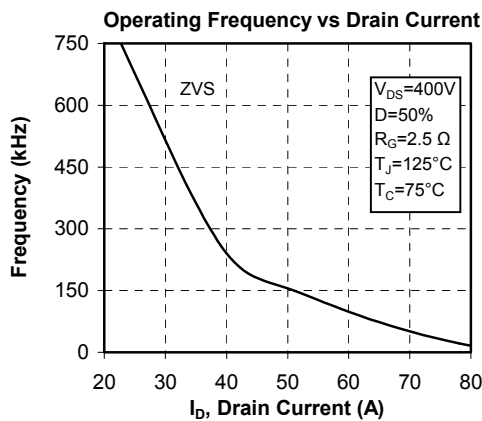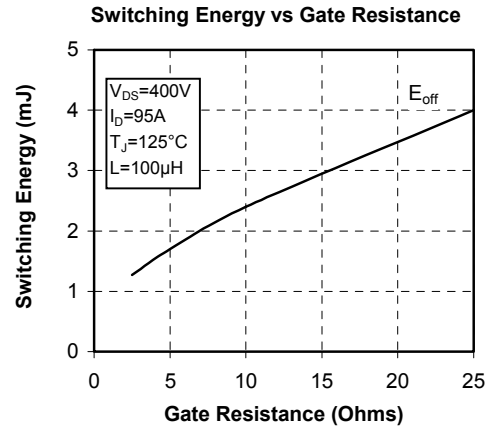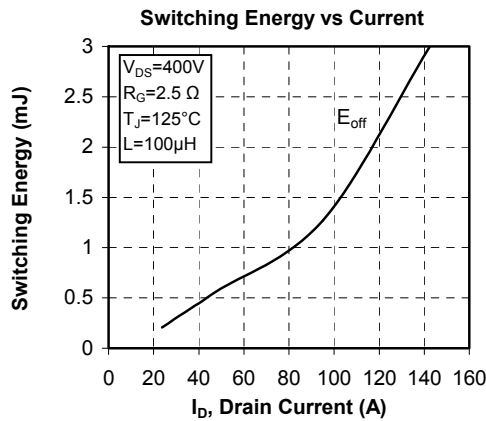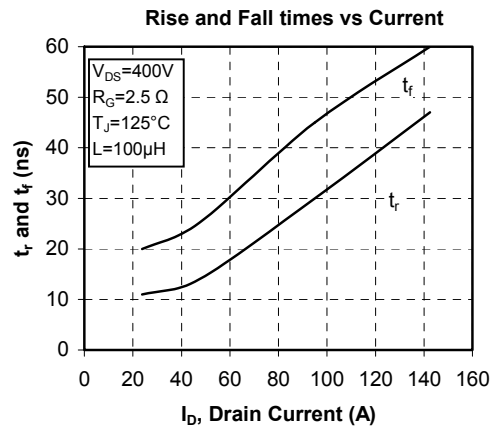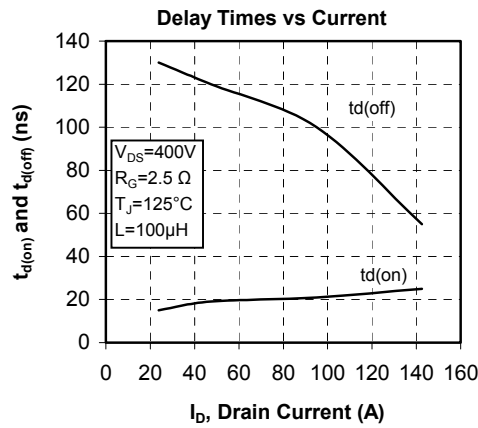

“COOLMOST™” comprise a new family of transistors developed by Infineon Technologies AG. “COOLMOS” is a trademark of Infineon Technologies AG”.

DISCLAIMER

The information contained in the document (unless it is publicly available on the Web without access restrictions) is PROPRIETARY AND CONFIDENTIAL information of Microsemi and cannot be copied, published, uploaded, posted, transmitted, distributed or disclosed or used without the express duly signed written consent of Microsemi. If the recipient of this document has entered into a disclosure agreement with Microsemi, then the terms of such Agreement will also apply. This document and the information contained herein may not be modified, by any person other than authorized personnel of Microsemi. No license under any patent, copyright, trade secret or other intellectual property right is granted to or conferred upon you by disclosure or delivery of the information, either expressly, by implication, inducement, estoppels or otherwise. Any license under such intellectual property rights must be approved by Microsemi in writing signed by an officer of Microsemi.

Microsemi reserves the right to change the configuration, functionality and performance of its products at anytime without any notice. This product has been subject to limited testing and should not be used in conjunction with life-support or other mission-critical equipment or applications. Microsemi assumes no liability whatsoever, and Microsemi disclaims any express or implied warranty, relating to sale and/or use of Microsemi products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright or other intellectual property right. Any performance specifications believed to be reliable but are not verified and customer or user must conduct and complete all performance and other testing of this product as well as any user or customers final application. User or customer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the customer's and user's responsibility to independently determine suitability of any Microsemi product and to test and verify the same. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the User. Microsemi specifically disclaims any liability of any kind including for consequential, incidental and punitive damages as well as lost profit. The product is subject to other terms and conditions which can be located on the web at <http://www.microsemi.com/legal/tnc.asp>

Life Support Application

Seller's Products are not designed, intended, or authorized for use as components in systems intended for space, aviation, surgical implant into the body, in other applications intended to support or sustain life, or for any other application in which the failure of the Seller's Product could create a situation where personal injury, death or property damage or loss may occur (collectively "Life Support Applications").

Buyer agrees not to use Products in any Life Support Applications and to the extent it does it shall conduct extensive testing of the Product in such applications and further agrees to indemnify and hold Seller, and its officers, employees, subsidiaries, affiliates, agents, sales representatives and distributors harmless against all claims, costs, damages and expenses, and attorneys' fees and costs arising, directly or indirectly, out of any claims of personal injury, death, damage or otherwise associated with the use of the goods in Life Support Applications, even if such claim includes allegations that Seller was negligent regarding the design or manufacture of the goods.

Buyer must notify Seller in writing before using Seller's Products in Life Support Applications. Seller will study with Buyer alternative solutions to meet Buyer application specification based on Sellers sales conditions applicable for the new proposed specific part.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Microchip:](#)

[APTC60AM242G](#)