


50Ω    21 dB    4 to 20 GHz

## The Big Deal

- Wideband, 4-20 GHz
- Excellent coupling flatness 21±2 dB typ.
- Highly repeatable performance (GaAs based design)
- Small Size, 4 x 4 mm
- No external termination required



CASE STYLE: DG1847

## Product Overview

Mini-Circuits' EDC21-24+ is a 21 dB directional coupler that operates from 4 to 20 GHz packaged in MCLP 4 x 4mm, 24-lead package. It provides excellent coupling flatness over a broad bandwidth and good return loss. This coupler also provides a quadrature phase shift between the signal at the through port and coupler port. Manufacturing using GaAs Technology, this model results in relatively high repeatability in performance.

## Key Features

Feature	Advantages
Wideband, 4-20 GHz	EDC21-24+ can be used in many applications, saving component count. Also ideal for wideband applications such as military and instrumentation.
Excellent coupling flatness	Excellent coupling flatness yields higher accuracy.
Small size, 4x4 MCLP package.	Tiny footprint saves space in dense layouts while providing low inductance, repeatable transitions, and excellent thermal contact to the PCB.

# MMIC Surface Mount Directional Coupler

## EDC21-24+

50Ω    21 dB    4 to 20 GHz

### Features

- low mainline loss, 0.7 dB typ.
- excellent coupling flatness,  $\pm 2$ dB
- small size, 4x4 mm
- highly repeatable performance (GaAs based design)
- no external termination required.

### Applications

- satellite communications
- wireless infrastructure
- test and measurements



Generic photo used for illustration purposes only

CASE STYLE: DG1847

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Electrical Specifications at 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		4000		20000	MHz
Mainline Loss <sup>1</sup>	4000 - 8000	—	0.4	1.0	dB
	8000 - 10000	—	0.7	1.4	
	10000 - 15000	—	0.8	1.5	
	15000 - 20000	—	0.9	2.0	
Nominal Coupling	4000 - 8000	18.7	22	25.8	dB
	8000 - 10000	17.8	21	24.6	
	10000 - 15000	18.0	21	24.8	
	15000 - 20000	17.5	21	24.2	
Coupling Flatness( $\pm$ )	4000 - 20000	—	2.0	—	dB
Directivity	4000 - 8000	17.2	21	—	dB
	8000 - 10000	12.5	19	—	
	10000 - 15000	11	16	—	
	15000 - 20000	9.1	14	—	
Return Loss (Input)	4000 - 8000	—	26	—	dB
	8000 - 10000	—	16	—	
	10000 - 15000	—	17	—	
	15000 - 20000	—	21	—	
Return Loss (Output)	4000 - 8000	—	26	—	dB
	8000 - 10000	—	16	—	
	10000 - 15000	—	17	—	
	15000 - 20000	—	21	—	
Return Loss (Coupled)	4000 - 8000	—	19	—	dB
	8000 - 10000	—	16	—	
	10000 - 15000	—	15	—	
	15000 - 20000	—	21	—	

### Maximum Ratings

Parameter	Ratings
Operating Temperature	-40°C to 85°C
Storage Temperature	-65°C to 150°C
Input Power	32.5 dBm (5 minute max.) 29.5 dBm (continuous)
Power at internal termination	15 dBm (5 minute max.) 12 dBm (continuous)

Permanent damage may occur if any of these limits are exceeded.


\* ESD rating

Human body model (HBM): Class 1B(500V) in accordance with ANSI/ESD 5.1-2007


### Pad Connections

Function	Pad Number
INPUT	3
COUPLED	7
OUTPUT	16
GROUND	1,2,4-6,8-15, 17-24 & paddle

### Electrical Schematic

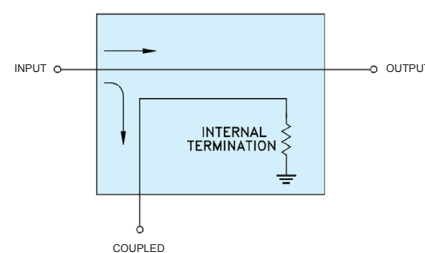


### Outline Drawing

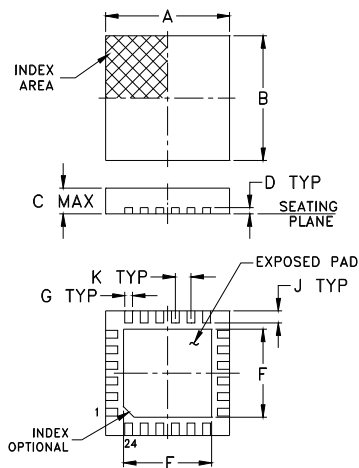

Lead Finish: Matte-Tin

### PCB Land Pattern



Suggested Layout,  
Tolerance to be within  $\pm 0.002$


### Product Marking



### Outline Dimensions (inch/mm)


A	B	C	D	E	F	G	H	J
.157	.157	.039	.008	.104	.104	.009	--	.016
4.0	4.0	1.0	0.20	2.64	2.64	0.23	--	0.41
K	L	M	N	P	Q	R	wt	
.020	.166	.166	.102	.012	.020	.102	grams	
0.50	4.22	4.22	2.59	0.30	0.51	2.59	0.04	

### Demo Board MCL P/N: TB-978+ Suggested PCB Layout (PL-532)

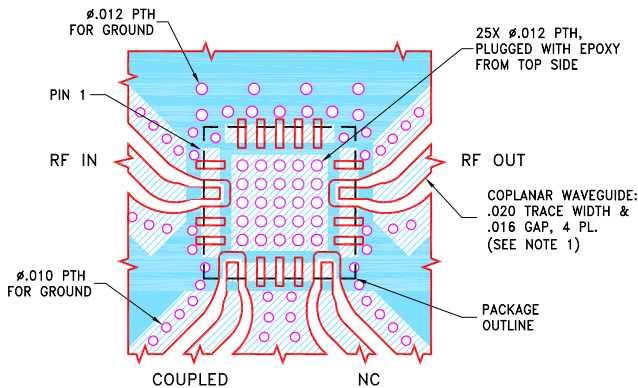

### Tape and Reel (F68)

DEVICE ORIENTATION IN T&R

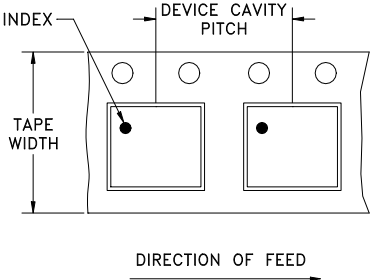

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel see note
12	8	7	Small quantity standard
			20
			50
			100
			200
			500
		7	Standard
		7	1000
		7	2000
		13	Standard
		13	3000
		13	4000




#### NOTES:

1. TRACE WIDTH & GAP PARAMETERS ARE SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .010"±.001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
4000	0.32	24.30	23.62	23.47	23.52	24.68
6000	0.38	22.19	21.70	26.44	26.26	17.66
8000	0.51	21.31	22.20	19.59	19.45	19.17
10000	0.80	21.30	17.82	12.76	12.34	15.83
12000	0.65	21.13	15.88	20.09	20.67	18.65
14000	0.74	21.54	15.87	18.61	17.91	13.09
15000	0.74	21.37	13.19	27.10	27.14	15.85
18000	0.81	20.89	13.36	28.56	24.37	39.71
20000	1.01	20.17	11.27	15.77	14.20	14.33

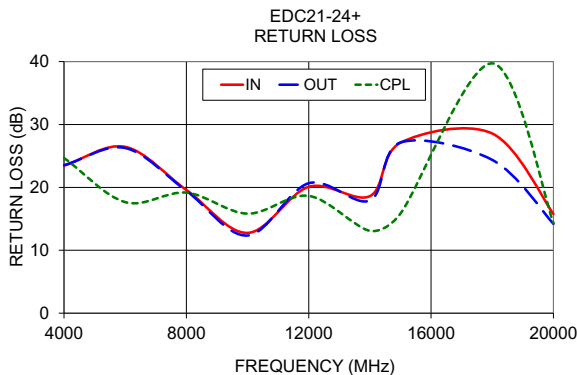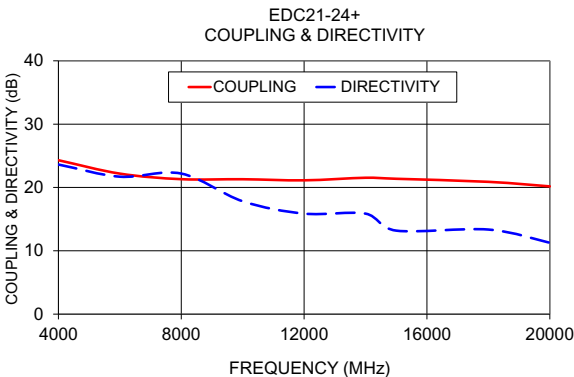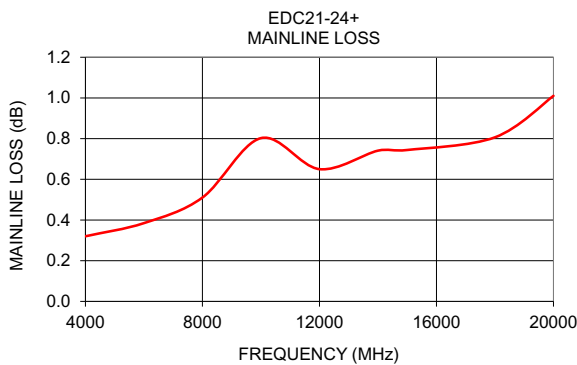

Additional Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[EDC21-24+](#)