


Accel 25 Click

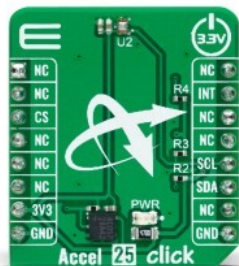

PID: MIKROE-5602

Accel 25 Click is a compact add-on board that contains an acceleration sensor. This board features the [MXC4005XC](#), a 12-bit three-axis thermal accelerometer from [MEMSIC](#). It allows selectable full-scale acceleration measurements of $\pm 2g$, $\pm 4g$, or $\pm 8g$ in three axes with a compatible I2C serial interface with 400KHz fast mode operation. Alongside low offset and temperature signal with high accuracy, the MXC6655XA also detects six orientation positions, X/Y shake, and shake directions with an appropriate interrupt signal for these states. This Click board™ is suitable for various information appliances, consumer electronics, household safety applications, and more.

How does it work?

Accel 25 Click is based on the MXC4005XC, a highly reliable digital triaxial acceleration from MEMSIC. The MXC4005XC is highly configurable with a programmable acceleration range of $\pm 2g$, $\pm 4g$, or $\pm 8g$ based on MEMSIC's proprietary thermal technology built with a $0.18\mu m$ standard CMOS process. It contains no moving sensor parts, eliminating field reliability and repeatability issues; there is no measurable resonance (immunity to vibration), no stiction, and no detectable hysteresis.

Mikroe produces entire development toolchains for all major microcontroller architectures.


Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

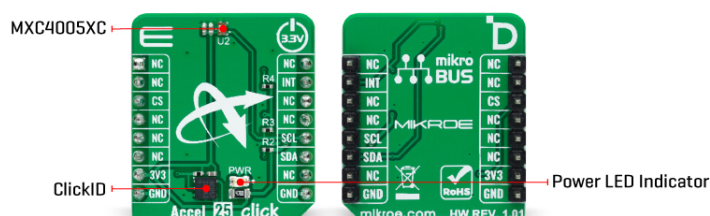

The MXC4005XC also eliminates the "click" sounds typically heard in ball-based orientation sensors. The shock survival of this MEMS sensing structure is greater than 200,000g. This sensor provides X/Y/Z axis acceleration signals with a low 0g offset and temperature signals with high accuracy. In addition, it also detects six orientation positions, X/Y shake, and shakes directions.

Accel 25 Click communicates with MCU using the standard I2C 2-Wire interface to read data and configure settings capable of operating in a standard or fast mode of operation. The acceleration signal is provided in 12-bit output resolution. In addition to communication pins, this board also possesses an additional interrupt pin, routed to the INT pin on the mikroBUS™ socket, for orientation and X/Y shake detections. The MXC4005XC allows users to be placed in a Power-Down mode enabled through the I2C interface.

This Click board™ can only be operated with a 3.3V logic voltage level. The board must perform appropriate logic voltage level conversion before using MCUs with different logic levels. However, the Click board™ comes equipped with a library containing functions and an example code that can be used, as a reference, for further development.

Specifications

Type	Motion
Applications	Can be used for a wide range of information appliances, consumer electronics, household safety applications, and more
On-board modules	MXC4005XC - digital triaxial acceleration from MEMSIC
Key Features	Low power consumption, high performance and resolution, MEMS sensor with on-chip signal processing, no moving parts, 12-bit signal output for X, Y and Z axes, 6-position orientation detection, shake detection, I2C interface, and more
Interface	I2C
Feature	ClickID
Compatibility	mikroBUS™

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.




ISO 9001: 2015 certification of quality management system (QMS).

Click board size	S (28.6 x 25.4 mm)
Input Voltage	3.3V

Pinout diagram

This table shows how the pinout on Accel 25 Click corresponds to the pinout on the mikroBUS™ socket (the latter shown in the two middle columns).

Notes	Pin					Pin	Notes
	NC	1	AN	PWM	16	NC	
	NC	2	RST	INT	15	INT	Interrupt
ID COMM	CS	3	CS	RX	14	NC	
	NC	4	SCK	TX	13	NC	
	NC	5	MISO	SCL	12	SCL	I2C Clock
	NC	6	MOSI	SDA	11	SDA	I2C Data
Power Supply	3.3V	7	3.3V	5V	10	NC	
Ground	GND	8	GND	GND	9	GND	Ground

Onboard settings and indicators

Label	Name	Default	Description
LD1	PWR	-	Power LED Indicator

Accel 25 Click electrical specifications

Description	Min	Typ	Max	Unit
Supply Voltage	-	3.3	-	V
Acceleration Range	±2	-	±8	g
Acceleration Resolution	-	12	-	bit
Sensitivity (±2 ~ ±8)	256	-	1024	LSB/g

Software Support

We provide a library for the Accel 25 Click as well as a demo application (example), developed using Mikroe [compilers](#). The demo can run on all the main Mikroe [development boards](#).

Package can be downloaded/installed directly from NECTO Studio Package Manager (recommended), downloaded from our [LibStock™](#) or found on [Mikroe github account](#).

Library Description

This library contains API for Accel 25 Click driver.

Key functions

- accel25_soft_reset Accel 25 soft reset function.
- accel25_set_full_scale_range Accel 25 set full scale range function.

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

- accel25_read_data Accel 25 read data function.

Example Description

This example demonstrates the use of Accel 25 Click board™ by reading and displaying accel data (X, Y, and Z axis) as well as temperature measurements on the USB UART.

The full application code, and ready to use projects can be installed directly from NECTO Studio Package Manager (recommended), downloaded from our [LibStock™](#) or found on [Mikroe github account](#).

Other Mikroe Libraries used in the example:

- MikroSDK.Board
- MikroSDK.Log
- Click.Accel25

Additional notes and informations

Depending on the development board you are using, you may need [USB UART click](#), [USB UART 2 Click](#) or [RS232 Click](#) to connect to your PC, for development systems with no UART to USB interface available on the board. UART terminal is available in all Mikroe [compilers](#).

mikroSDK

This Click board™ is supported with [mikroSDK](#) - Mikroe Software Development Kit, which needs to be downloaded from the [LibStock](#) and installed for the compiler you are using to ensure proper operation of mikroSDK compliant Click board™ demo applications.

For more information about mikroSDK, visit the [official page](#).

Resources

[mikroBUS™](#)

[mikroSDK](#)

[Click board™ Catalog](#)

[Click boards™](#)

[ClickID](#)

Downloads

[Accel 25 click example on Libstock](#)

[Accel 25 click 2D and 3D files v101](#)

[MXC4005XC datasheet](#)

[Accel 25 click schematic v101](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mikroe:](#)

[MIKROE-5602](#)