

## EEPROM 7 Click



PID: MIKROE-4421

EEPROM 7 Click is a compact add-on board that contains the highest-density memory solution. This board features the 25CSM04, a 4-Mbit SPI Serial EEPROM with a 128-bit serial number and enhanced write protection mode from Microchip. Internally organized as 2,048 pages of 256 bytes each, the 25CSM04 comes up with the compatible SPI serial interface. It includes a security register with a 128-bit unique serial number and a 256-byte (2048-bit) user-programmable lockable ID page, built-in ECC, and a configurable write protection scheme for all bytes. This Click board™ is suitable for use in consumer and industrial applications where reliable and dependable nonvolatile memory storage is essential.

EEPROM 7 Click is supported by a mikroSDK compliant library, which includes functions that simplify software development. This Click board™ comes as a fully tested product, ready to be used on a system equipped with the mikroBUS™ socket.

### How does it work?

EEPROM 7 Click is based on the 25CSM04, a 4 Mb Serial EEPROM with a Serial Peripheral Interface (SPI), a 128-bit serial number, and enhanced Write Protection Mode from Microchip. The 25CSM04 is organized as 524,288 bytes of 8 bits each (512 Kbyte) and features a nonvolatile Security register independent of the 4 Mb main memory array. The first half of the Security register is read-only and contains a factory-programmed, globally unique 128-bit serial number in the first 16 bytes. It also includes a Software Device Reset function that allows the user to reset the device to its power-on default behavior without the need to power cycle the device.

Mikroe produces entire development toolchains for all major microcontroller architectures.


Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

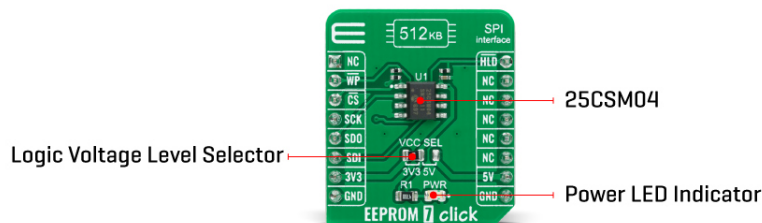

Some other advantages of this Click board™ include a lower standby current, the ability to perform single-byte, multi-byte, and full-page writes, shorter erase/rewrite times, and more erase/rewrite cycles. Besides, it includes a user-programmable lockable ID page, built-in ECC, and a configurable write protection scheme for all bytes.

EEPROM 7 Click communicates with MCU using the SPI serial interface that supports the two most common modes, SPI Mode 0 and 3, with a maximum SPI frequency of 8 MHz. In addition to the SPI communication, the EEPROM 7 Click also has two additional pins used for Write Protection and HOLD function routed to the RST and PWM pins of the mikroBUS™ socket.

When a serial communication sequence is underway, a HOLD pin, labeled as HLD, can be used to pause the serial communication with the device without having to stop or reset the clock sequence. The Hold Mode, however, does not affect the internal write cycle. Therefore, if a write cycle is in progress, asserting the HLD pin will not pause the sequence, and the write cycle will continue until its completion.

On the other side, the configurable Write Protection function labeled as WP allows the user to select Legacy Write Protection Mode or Enhanced Write Protection Mode. This pin serves to protect the STATUS register and memory array contents via the Block Protection Modes when Legacy Write Protection mode is enabled. When Enhanced Write Protection mode is enabled, a WP pin protects any memory zone according to how its corresponding Memory Partition registers are programmed.

This Click board™ is designed to operate with both 3.3V and 5V logic voltage levels selected via the VCC SEL jumper. It allows for both 3.3V and 5V capable MCUs to use the SPI communication lines properly. However, the Click board™ comes equipped with a library that contains easy to use functions and an example code which can be used, as a reference, for further development.

## Specifications

Type	EEPROM
Applications	Can be used for consumer and industrial applications where reliable and dependable nonvolatile memory storage is essential.
On-board modules	EEPROM 7 Click is based on the 25CSM04, a 4

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.




ISO 9001: 2015 certification of quality management system (QMS).

	Mb Serial EEPROM with a Serial Peripheral Interface (SPI), a 128-bit serial number, and enhanced Write Protection Mode from Microchip.
Key Features	4-Mbit serial EEPROM, security register, high-speed clock frequency, enhanced write protection mode, high reliability, and more.
Interface	SPI
Feature	No ClickID
Compatibility	mikroBUS™
Click board size	S (28.6 x 25.4 mm)
Input Voltage	3.3V or 5V

## Pinout diagram

This table shows how the pinout on EEPROM 7 Click corresponds to the pinout on the mikroBUS™ socket (the latter shown in the two middle columns).

Notes	Pin					Pin	Notes
	NC	1	AN	PWM	16	<b>HLD</b>	HOLD Function
Write Protect	<b>WP</b>	2	RST	INT	15	NC	
SPI Chip Select	<b>CS</b>	3	CS	RX	14	NC	
SPI Clock	<b>SCK</b>	4	SCK	TX	13	NC	
SPI Data OUT	<b>SDO</b>	5	MISO	SCL	12	NC	
SPI Data IN	<b>SDI</b>	6	MOSI	SDA	11	NC	
Power Supply	<b>3.3V</b>	7	3.3V	5V	10	<b>5V</b>	Power Supply
Ground	<b>GND</b>	8	GND	GND	9	<b>GND</b>	Ground

## Onboard settings and indicators

Label	Name	Default	Description
LD1	PWR	-	Power LED Indicator
JP1	VCC SEL	Left	Power Supply Voltage Selection 3V3/5V: Left position 3V3, Right position 5V

## EEPROM 7 Click electrical specifications

Description	Min	Typ	Max	Unit
Supply Voltage	2.5	-	5.5	V
Memory Size	-	4	-	Mbit
EEPROM Write Endurance	1.000.000	-	-	Write Cycles
EEPROM Data Retention	100	-	-	Years
Operating Temperature Range	-40	-	+85	°C

## Software Support

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
 ISO 14001: 2015 certification of environmental management system.  
 OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

We provide a library for the EEPROM 7 Click on our [LibStock](#) page, as well as a demo application (example), developed using MikroElektronika [compilers](#). The demo can run on all the main MikroElektronika [development boards](#).

## Library Description

The library covers all the necessary functions to control EEPROM 7 Click board™. Library performs a standard SPI interface communication.

Key functions:

- (uint8\_t \*p\_tx\_data, uint8\_t n\_bytes) - Write EEPROM memory function.
- ( uint8\_t \*p\_rx\_data, uint8\_t n\_bytes) - Read EEPROM memory function.
- uint8\_t eeprom7\_is\_device\_ready ( void ) - Check the device is ready function.

## Examples description

The application is composed of three sections :

- System Initialization - Initializes SPI, sets RST, CS and PWM pin as outputs, begins to write log.
- Application Initialization - Initialization driver enables - SPI, also write log.
- Application Task - (code snippet) This is an example that demonstrates the use of the EEPROM 7 Click board™. In this example, we write and then read data from EEPROM memory. Results are being sent to the Usart Terminal where you can track their changes. All data logs write on USB uart changes approximately for every 3 sec.

The full application code, and ready to use projects can be found on our [LibStock](#) page.

Other mikroE Libraries used in the example:

- SPI
- UART
- Conversions

## Additional notes and informations

Depending on the development board you are using, you may need [USB UART click](#), [USB UART 2 click](#) or [RS232 click](#) to connect to your PC, for development systems with no UART to USB interface available on the board. The terminal available in all MikroElektronika [compilers](#), or any other terminal application of your choice, can be used to read the message.

## mikroSDK

This Click board™ is supported with [mikroSDK](#) - MikroElektronika Software Development Kit. To ensure proper operation of mikroSDK compliant Click board™ demo applications, mikroSDK should be downloaded from the [LibStock](#) and installed for the compiler you are using.

For more information about mikroSDK, visit the [official page](#).

## Resources

[mikroBUS™](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

[mikroSDK](#)

[Click board™ Catalog](#)

[Click Boards™](#)

## Downloads

[EEPROM 7 click 2D and 3D files](#)

[25CSM04 datasheet](#)

[EEPROM 7 click example on Libstock](#)

[EEPROM 7 click schematic](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.  
ISO 14001: 2015 certification of environmental management system.  
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mikroe:](#)

[MIKROE-4421](#)