

INTERCONNECTS

SERIES 800 & 801 • 2,54 GRID (0,76 DIA. PINS), SOLDERLESS PRESS-FIT • SINGLE ROW STRIPS

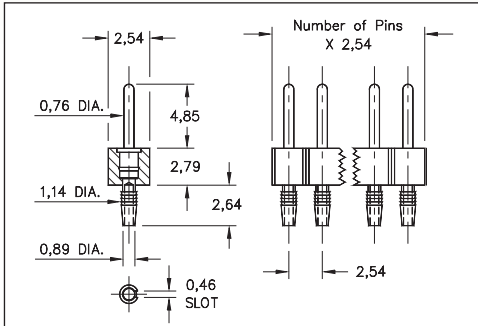


FIG. 1

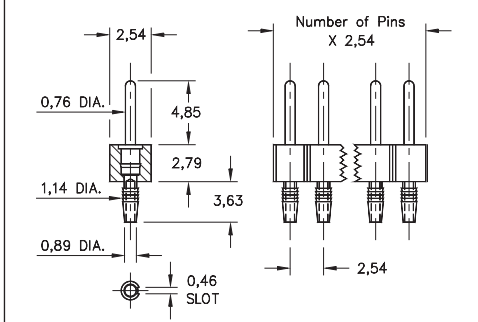


FIG. 2

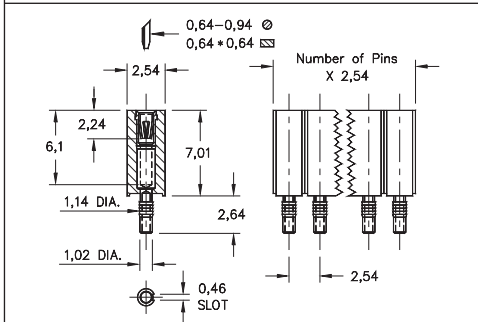


FIG. 3


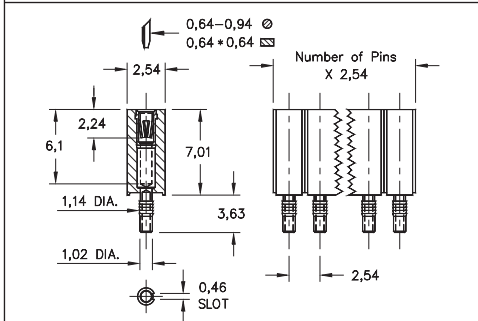


FIG. 4

- The unique compliant tail pins conform to $1,02 \pm 0,76$ finished hole without stressing inner layers. Patent No. 4,799,904
- Headers and sockets are available for board thicknesses of 1,52 - 2,54 and 2,29 - 3,3. See ordering information for details
- Series 800 pin headers use MM #5601 and #5602 compliant tail pins featuring a 0,76 dia. mating lead. See page 220 for details
- Series 801 sockets MM #4614 or #4615 use Hi-Rel, 6-finger BeCu #47 contact rated at 4.5 amps. Receptacles accept 0,76 diameter pins & 0,64 square pins. See pg. 256 for details
- Insulators are high temperature thermoplastic

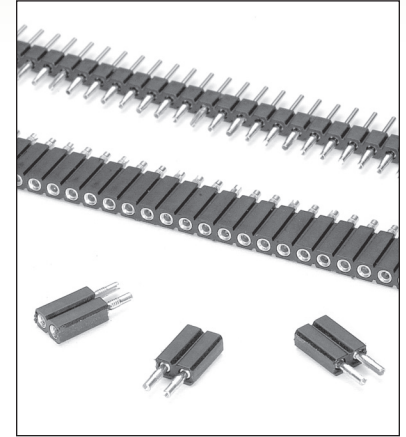

ORDERING INFORMATION

FIG. 1	Compliant Tail Pin Header for 1,52 - 2,54 Thick Boards			
	800-XX-0-61-001000 Specify number of pins 01-64			
FIG. 2	Compliant Tail Pin Header for 2,29 - 3,3 Thick Boards			
	800-XX-0-62-001000 Specify number of pins 01-64			
RoHS-2 2011/65/EU XX=Plating Code See Below For Electrical, Mechanical & Enviromental Data, See page 264				
SPECIFY PLATING CODE XX=				
Pin Plating	10 	90	40 	
	0,25µm Au	5,08µm Sn/Pb	5,08µm Sn	

FIG. 3	Compliant Tail Socket for 1,52 - 2,54 Thick Boards					
	801-XX-0-61-001000 Specify number of pins 01-50					
FIG. 4	Compliant Tail Socket for 2,29 - 3,3 Thick Boards					
	801-XX-0-62-001000 Specify number of pins 01-50					
RoHS-2 2011/65/EU XX=Plating Code See Below For Electrical, Mechanical & Environmental Data, See page 264						
SPECIFY PLATING CODE XX=		91	93	99	41	43
Sleeve (Pin)		5,08µm Sn/Pb	5,08µm Sn/Pb	5,08µm Sn/Pb	5,08µm Sn	5,08µm Sn
Contact (Clip)		0,25µm Au	0,76µm Au	2,54µm Sn/Pb	0,25µm Au	0,76µm Au

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mill-Max:

[801-99-050-61-001000](#) [801-99-036-61-001000](#) [801-93-036-61-001000](#) [800-90-064-62-001000](#) [800-90-064-61-001000](#) [800-10-064-61-001000](#) [800-10-064-62-001000](#) [801-93-050-61-001000](#) [801-43-036-61-001000](#) [800-40-064-62-001000](#) [800-40-064-61-001000](#) [801-43-050-61-001000](#) [801-93-007-61-001000](#) [800-10-005-62-001000](#) [800-10-022-62-001000](#) [801-43-001-61-001000](#) [800-10-002-62-001000](#) [800-10-006-62-001000](#) [800-10-004-61-001000](#) [800-10-012-61-001000](#) [800-10-032-61-001000](#) [800-10-054-62-001000](#) [800-10-061-61-001000](#) [800-40-001-61-001000](#) [801-41-002-61-001000](#) [801-43-039-61-001000](#) [801-91-012-61-001000](#) [801-91-050-61-001000](#) [801-41-050-61-001000](#)