



Mini-Circuits

COAXIAL

Fixed Attenuator

HAT-A-SERIES

50 Ω Up to 2W DC to 2000 MHz

THE BIG DEAL

- Wideband coverage, DC to 2000 MHz
- Up to 2Watt rating
- Rugged unibody construction
- Excellent VSWR
- Excellent flatness

APPLICATIONS

- Signal level adjustment
- impedance matching



Generic photo used for illustration purposes only

| | |
|------------|---------------------|
| Model No. | HAT-A-SERIES |
| Case Style | FF747 |
| Connectors | BNC Male-BNC Female |

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

PRODUCT OVERVIEW

Mini-Circuits' HAT-A series are fixed attenuators from DC to 2000 MHz frequency range with excellent flatness in attenuation. HAT-A series is available with nominal attenuation of 1 to 30 dB. This attenuator series support testing and measurement application. Precise performance, excellent VSWR and rugged unibody construction makes this model ideal solution for systems requiring precise attenuation across very wide frequency range.

KEY FEATURES

| Feature | Advantages |
|---------------------|-------------------------------------------------|
| Rugged construction | Excellent durability for a long lifetime of use |
| Up to 2Watt rating | Good power handling |
| Excellent VSWR | Well matched for 50 Ω systems |
| Flat attenuation | Good performance over the band. |

Mini-Circuits



COAXIAL

Fixed Attenuator

HAT-10A+

MAXIMUM RATINGS

| | |
|-----------------------|----------------|
| Operating Temperature | -45°C to 100°C |
| Storage Temperature | -55°C to 100°C |

Permanent damage may occur if any of these limits are exceeded.

OUTLINE DRAWING

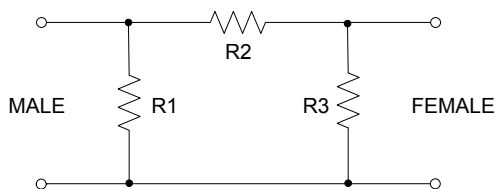


OUTLINE DIMENSIONS (Inch/mm)

| | | |
|-------|-------|-------|
| B | D | wt |
| .62 | 1.94 | grams |
| 15.75 | 49.28 | 30.0 |

Note: Please refer to case style drawing for details

ELECTRICAL SCHEMATIC



ELECTRICAL SPECIFICATIONS AT 25°C

| Parameter | Condition (MHz) | Min. | Typ. | Max. | Unit |
|-----------------------------------------------|-----------------|------|----------|------|------|
| Frequency Range | | DC | - | 2000 | MHz |
| Attenuation ¹ nominal ³ | 10 | - | 10 ± 0.3 | - | dB |
| Attenuation Flatness ² | DC - 500 | - | 0.20 | - | dB |
| | DC - 1000 | - | 0.25 | - | |
| | DC - 2000 | - | 0.30 | - | |
| VSWR | DC - 500 | - | 1.20 | - | :1 |
| | DC - 1000 | - | 1.20 | - | |
| | DC - 2000 | - | 1.25 | - | |
| Input Power ⁴ | | - | - | 1.7 | W |

1. Attenuation varies by 0.3 dB max. over temperature.

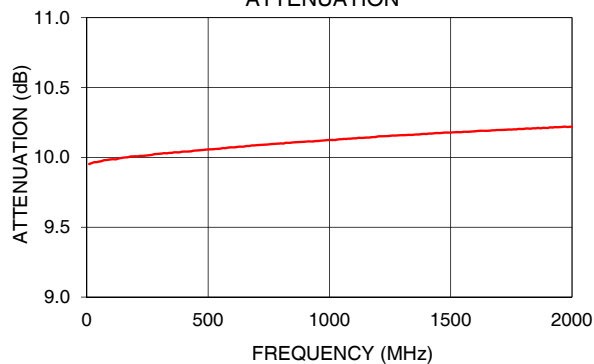
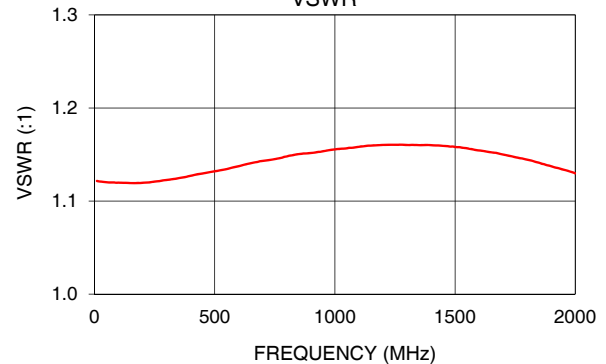
2. Flatness = variation over band divided by 2.

3. Nominal attenuation at 10 MHz

4. RF power at 25°C is 1.7W; Derate linearly to 1.0W at 85°C

TYPICAL PERFORMANCE DATA

| Frequency (MHz) | Attenuation (dB) | VSWR (:1) |
|-----------------|------------------|-----------|
| 10 | 9.95 | 1.12 |
| 50 | 9.97 | 1.12 |
| 100 | 9.99 | 1.12 |
| 250 | 10.01 | 1.12 |
| 400 | 10.04 | 1.13 |
| 500 | 10.06 | 1.13 |
| 600 | 10.07 | 1.14 |
| 800 | 10.10 | 1.15 |
| 1000 | 10.12 | 1.16 |
| 1200 | 10.15 | 1.16 |
| 1300 | 10.16 | 1.16 |
| 1500 | 10.18 | 1.16 |
| 1700 | 10.20 | 1.15 |
| 1800 | 10.20 | 1.14 |
| 2000 | 10.22 | 1.13 |

HAT-10A+
ATTENUATIONHAT-10A+
VSWR

NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[HAT-10A+](#)