

# CHIP COIL (CHIP INDUCTORS) LQH32CH□□□□53L Murata Standard Reference Specification [AEC-Q200]

### 1.Scope

This Reference specification applies to LQH32CH 53L series, Chip coil (Chip Inductors) for automotive Electronics based on AEC-Q200.

#### 2.Part Numbering

32 С 1R0 LQ Н Н (ex) Product ID Structure Dimension Applications Category Inductance Tolerance Features Electrode Packaging (L×W) L:Taping Characteristics

# 3.Rating

 Operating Temperature Range. -40 °C to +85 °C Storage Temperature Range. -40 °C to +105 °C

Customer	MURATA	Inductance		DC	Self Resonant	Rated	ESD
Part Number	Part Number	(µH)	Tolerance	Resistance (Ω)	Frequency (MHz min)	Current (mA)	Rank 5A: 8kV
	LQH32CH1R0M53L	1.0		0.060±30%	100	1000	
	LQH32CH2R2M53L	2.2		0.097±30%	64	790	
	LQH32CH3R3M53L	3.3	±20%	0.12±30%	50	710	
	LQH32CH4R7M53L	4.7		0.15±30%	43	650	5A
	LQH32CH6R8M53L	6.8		0.25±30%	32	540	) DA
	LQH32CH100K53L	10		0.30±30%	26	450	
	LQH32CH150K53L	15	±10%	0.58±30%	26	300	
	LQH32CH220K53L	22		0.71±30%	19	250	

<sup>\*</sup>When applied Rated current to the products, self temperature rise shall be limited to 20°C max and Inductance will be within ±10% of initial Inductance value.

### 4. Testing Conditions

《Unless otherwise specified》

Temperature: Ordinary Temperature / 15°C to 35°C


: Ordinary Humidity / 25%(RH) to 85%(RH) Humidity

《In case of doubt》


Temperature : 20°C± 2°C

: 60%(RH) to 70%(RH) Humidity Atmospheric Pressure: 86kPa to 106 kPa

#### 5. Appearance and Dimensions



■Unit Mass (Typical value) 0.045g



# Reference Only

### 6. Electrical Performance

No.	Item	Specification	Test Method
6.1	Inductance	Inductance shall meet item 3.	Measuring Equipment :  KEYSIGHT 4192A or equivalent  Measuring Frequency : 1MHz
6.2	DC Resistance	DC Resistance shall meet item 3.	Measuring Equipment : Digital multi meter
6.3	Self Resonant Frequency(S.R.F)	S.R.F shall meet item 3.	Measuring Equipment : KEYSIGHT E4991A or equivalent

#### 7. AEC-Q200 Requirement

# 7.1 Performance (based on Table 5 for Magnetics(Inductors / Transformer) AEC-Q200 Rev.D issued June. 1 2010


	А	AEC-Q200		Murata Specification / Deviation		
No	Stress	Test Method	·		Deviation	
3	High	1000hours at 85 deg C	Meet Table A after testing.			
	Temperature Exposure	Set for 24hours at room temperature, then measured.	Table A	Appearance	No damage	
	Exposure	temperature, their measured.		Inductance change	Within ±5%	
				DC Resistance Change	Within ±5%	
4	Temperature Cycling	1000cycles -40 deg C to + 85deg C Set for 24hours at room temperature,then measured.	Meet Table A after testing.			
7	Biased Humidity	1000hours at 85 deg C, 85%RH unpowered.	Meet Table A after testing.			
8		Apply 85 deg C 1000 hours Set for 24hours at room temperature, then measured	Meet Table A after testing.			
9	External Visual	Visual inspection	No abnormalities			
10	Physical Dimension	Meet ITEM 5 (Style and Dimensions)	No defects			
	to Solvents	Per MIL-STD-202 Method 215	Not Applicable			
13		Per MIL-STD-202 Method 213 Condition C: 100g's/6ms/Half sine	Meet Table A after testing.			
14		5g's for 20 minutes, 12cycles eah of 3 orientations Test from 10-2000Hz.	No defects			
	to Soldering Heat	No-heating Solder temperature 260C+/-5 deg C Immersion time 10s	Pre-heating:	ation request : 150C+/-5C, 60s+/-5s A after testing.		

# Reference Only

	А	EC-Q200	Murata Specification / Deviation
No	Stress	Test Method	Murata Specification / Deviation
17	ESD	Per AEC-Q200-002	ESD Rank: Refer to Item 3. Rating. No defects
18	Solderbility	Per J-STD-002	Method b : Not Applicable 90% of the terminations is to be soldered. (Except exposed wire)
19	Electrical Characterization	Measured : Inductance	No defects
20	Flammability	Per UL-94	Not Applicable
21	Board Flex	Epoxy-PCB(1.6mm) Deflection 2mm(min) 60s minimum holding time	Murata deviation request: 30s No defects
22		Per AEC-Q200-006 A force of 17.7N for 60s	No defects

#### 8. Specification of Packaging

#### 8.1 Appearance and Dimensions of plastic tape

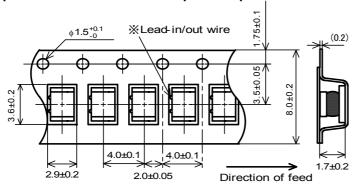

The packing directions of the chip coil in taping are unified with the in/out positions of the lead wire.

Dimension of the Cavity is measured at the bottom side.

#### 8.2 Specification of Taping

(1) Packing quantity (standard quantity)

2,000 pcs / reel

(2) Packing Method

Products shall be packed in the each embossed cavity of plastic tape and sealed by cover tape.

(3) Sprocket hole

The sprocket holes are to the right as the tape is pulled toward the user.

(4) Spliced point

Plastic tape and Cover tape has no spliced point.

(5) Missing components number


Missing components number within 0.1 % of the number per reel or 1 pc., whichever is greater, and are not continuous. The specified quantity per reel is kept.

#### 8.3 Pull Strength

Embossed carrier tape	10N min.	
Cover tape	5N min.	

#### 8.4 Peeling off force of cover tape


Speed of Peeling off	300mm / min
Peeling off force	0.2N to 0.7N (minimum value is typical)



# Reference Onl

### 8.5 Dimensions of Leader-tape, Trailer and Reel

There shall be leader-tape (cover tape) and trailer-tape (empty tape) as follows.

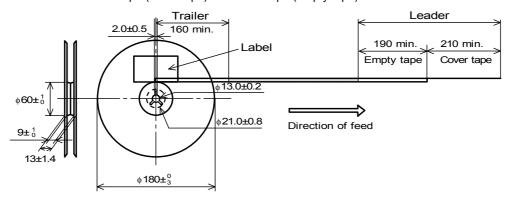

#### 8.6 Marking for reel

Customer part number, MURATA part number, Inspection number(\*1), RoHS marking(\*2), Quantity etc · · ·

\*1) < Expression of Inspection No.>

(2)

(1) Factory Code

(2) Date First digit : Year / Last digit of year

> Second digit : Month / Jan. to Sep.  $\rightarrow$  1 to 9, Oct. to Dec.  $\rightarrow$  O, N, D

Third, Fourth digit : Day

(3) Serial No.


\*2) « Expression of RoHS marking »  $ROHS - \underline{Y}(\underline{\Delta})$ 

- (1) RoHS regulation conformity parts.
- (2) MURATA classification number

#### 8.7 Marking for Outside package (corrugated paper box)

Customer name, Purchasing order number, Customer part number, MURATA part number, RoHS marking (\*2) ,Quantity, etc · · ·

### 8.8. Specification of Outer Case



Outer Case Dimensions (mm)		nsions	Standard Reel Quantity in Outer Cas
W	D	Н	(Reel)
186	186	93	5

\*Above Outer Case size is typical. It depends on a quantity of an order

#### 9. A Caution

#### 9.1Limitation of Applications

Please contact us before using our products for the applications listed below which require especially high reliability for the prevention of defects which might directly cause damage to the third party's life, body or property.

- (1) Aircraft equipment
- (7) Traffic signal equipment
- (2) Aerospace equipment
- (8) Disaster prevention / crime prevention equipment
- (3) Undersea equipment
- (9) Data-processing equipment
- (4) Power plant control equipment
- (10) Applications of similar complexity and /or reliability requirements
- (5) Medical equipment
- to the applications listed in the above
- (6) Transportation equipment (vehicles, trains, ships, etc.)

#### 9.2 Caution(Rating)

Do not exceed maximum rated current of the product. Thermal stress may be transmitted to the product and short/open circuit of the product or falling off the product may be occurred.

#### 9.3 Fail-safe

Be sure to provide an appropriate fail-safe function on your product to prevent a second damage that may be caused by the abnormal function or the failure of our product.



#### 10. Notice

This product is designed for solder mounting.


Please consult us in advance for applying other mounting method such as conductive adhesive.

#### 10.1 Land pattern designing

Recommended land patterns for flow and reflow soldering are as follows:

It has been designed for Electric characteristics and solderability.

Please follow the recommended pattern. Otherwise, their performance which includes electrical performance or solderability may be affected, or result to "position shift" in soldering process.

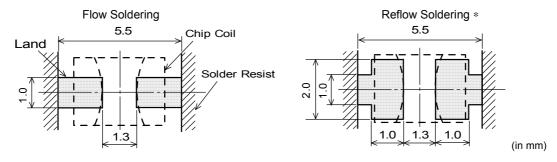

\* Applicable to flow soldering.

#### 10.2 Flux, Solder

Flux	<ul> <li>Use rosin-based flux.</li> <li>Don't use highly acidic flux with halide content exceeding 0.2(wt)% (chlorine conversion value).</li> <li>Don't use water-soluble flux.</li> </ul>
Solder	Use Sn-3.0Ag-0.5Cu solder     Standard thickness of solder paste : 200µm to 300µm

Other flux (except above) Please contact us for details, then use.

#### 10.3 Flow soldering / Reflow soldering conditions

•Pre-heating should be in such a way that the temperature difference between solder and product surface is limited to 150°C max. Cooling into solvent after soldering also should be in such a way that the temperature difference is limited to 100°C max.


Insufficient pre-heating may cause cracks on the product, resulting in the deterioration of products quality.

•Standard soldering profile and the limit soldering profile is as follows.

The excessive limit soldering conditions may cause leaching of the electrode and / or resulting in the deterioration of product quality.

·Soldering profile


#### (1)Flow soldering profile

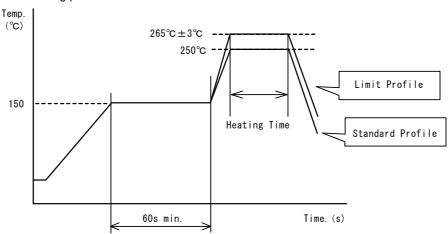

	Standard Profile	Limit Profile
Pre-heating	150°C, 60s min.	
Heating	250°C, 4s∼6s	265°C±3°C, 5s
Cycle of flow	2 times	1 time

# **Reference Only**

(2)Reflow soldering profile

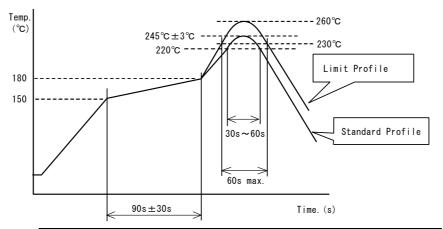

	Standard Profile	Limit Profile
Pre-heating	150~180°C, 90s±30s	
Heating	above 220°C, 30s∼60s	above 230°C, 60s max.
Peak temperature	245±3°C	260°C,10s
Cycle of reflow	2 times	1 time

#### 10.4 Reworking with soldering iron.


The following conditions must be strictly followed when using a soldering iron.

Pre-heating	150°C,1 min
Tip temperature	350°C max.
Soldering iron output	80W max.
Tip diameter	<i>ф</i> 3mm max.
Soldering time	3(+1,-0)s
Times	2 times

Note: Do not directly touch the products with the tip of the soldering iron in order to prevent the crack on the products due to the thermal shock.

### 10.5 Solder Volume


- · Solder shall be used not to be exceeded the upper limits as shown below.
- Accordingly increasing the solder volume, the mechanical stress to Chip is also increased.
   Exceeding solder volume may cause the failure of mechanical or electrical performance.



#### 10.6 Product's location

The following shall be considered when designing and laying out P.C.B.'s.

(1) P.C.B. shall be designed so that products are not subject to the mechanical stress due to warping the board.




Products shall be located in the sideways direction (Length:a<br/>b) to the mechanical stress.

# Reference Onl

(2) Components location on P.C.B. separation.

It is effective to implement the following measures, to reduce stress in separating the board. It is best to implement all of the following three measures; however, implement as many measures as possible to reduce stress.

Contents of Measures	Stress Level
(1) Turn the mounting direction of the component parallel to the board separation surface.	A > D*1
(2) Add slits in the board separation part.	A > B
(3) Keep the mounting position of the component away from the board separation surface.	A > C




\*1 A > D is valid when stress is added vertically to the perforation as with Hand Separation. If a Cutting Disc is used, stress will be diagonal to the PCB, therefore A > D is invalid.

Time: 5 min max.

(3) Mounting Components Near Screw Holes

When a component is mounted near a screw hole, it may be affected by the board deflection that occurs during the tightening of the screw. Mount the component in a position as far away from the screw holes as possible.



#### 10.7 Cleaning Conditions

Products shall be cleaned on the following conditions.

- (1) Cleaning temperature shall be limited to 60°C max.(40°C max for alcohol type cleaner.)
- (2) Ultrasonic cleaning shall comply with the following conditions with avoiding the resonance phenomenon at the mounted products and P.C.B. Frequency: 28kHz to 40kHz
- (3) Cleaner
  - 1. Alternative cleaner
    - Isopropyl alcohol (IPA)

Power: 20 W / I max.

- 2. Aqueous agent
  - •PINE ALPHA ST-100S
- (4) There shall be no residual flux and residual cleaner after cleaning.

In the case of using aqueous agent, products shall be dried completely after rinse with de-ionized water in order to remove the cleaner.

(5) Other cleaning

Please contact us.

#### 10.8 Resin coating

The inductance value may change due to high cure-stress of resin to be used for coating/molding products. An open circuit issue may occur by mechanical stress caused by the resin, amount/cured shape of resin, or operating condition etc. Some resin contains some impurities or chloride possible to generate chlorine by hydrolysis under some operating condition may cause corrosion of wire of coil, leading to open circuit.

So, please pay your careful attention when you select resin in case of coating/molding the products with the resin. Prior to use the coating resin, please make sure no reliability issue is observed by evaluating products mounted on your board.


#### 10.9 Caution for use

- · Sharp material such as a pair of tweezers or other material such as bristles of cleaning brush, shall not be touched to the winding portion to prevent the breaking of wire.
- · Mechanical shock should not be applied to the products mounted on the board to prevent the breaking of the core

#### 10.10 Handling of a substrate

After mounting products on a substrate, do not apply any stress to the product caused by bending or twisting to the substrate when cropping the substrate, inserting and removing a connector from the substrate or tightening screw to the substrate.

Excessive mechanical stress may cause cracking in the product.





#### 10.11 Storage and Handing Requirements

(1) Storage period

Use the products within 12 months after delivered.

Solderability should be checked if this period is exceeded.

(2) Storage conditions

• Products should be stored in the warehouse on the following conditions.

Temperature : -10 °C to 40 °C

Humidity : 15 % to 85 % relative humidity No rapid change on temperature and humidity The electrode of the products is coated with solder. Don't keep products in corrosive gases such as sulfur, chlorine gas or acid, or it may cause oxidization of electrode, resulting in poor solderability.

- Products should not be stored on bulk packaging condition to prevent the chipping of the core and the breaking of winding wire caused by the collision between the products.
- Products should be stored on the palette for the prevention of the influence from humidity, dust and so on.
- Products should be stored in the warehouse without heat shock, vibration, direct sunlight and so on.
- (3) Handling Condition

Care should be taken when transporting or handling product to avoid excessive vibration or mechanical shock.

#### 11. A Note

- (1) Please make sure that your product has been evaluated in view of your specifications with our product being mounted to your product.
- (2) You are requested not to use our product deviating from the agreed specifications.
- (3) The contents of this reference specification are subject to change without advance notice. Please approve our product specifications or transact the approval sheet for product specifications before ordering

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

# Murata:

<u>LQH32CH100K53L</u> <u>LQH32CH150K53L</u> <u>LQH32CH1R0M53L</u> <u>LQH32CH220K53L</u> <u>LQH32CH2R2M53L</u> LQH32CH3R3M53L LQH32CH4R7M53L LQH32CH6R8M53L