

SMD 434.0MHz SAW FILTER

AFS434S3

APPLICATION: Automotive Electronics/Remote Control



3.8 x 3.8 x 1.5mm

STANDARD SPECIFICATIONS:

CHARACTERISTICS	UNIT	MIN.	TYP.	MAX.
Center Frequency Fc	MHz	-	434	-
Bandwidth	MHz	-	$F_c \pm 2.0$	-
Insertion Loss @ Passband	dB	-	2.7	4.5
Ripple @ Passband	dB	-	0.7	1.5
Relative Attenuation				
Fc-100 ~ Fc-40.8 MHz	dB	50		-
Fc+40.8 ~ Fc+100 MHz	dB	50		-
DC Voltage	V	10		
Source Power	dBm	0		
Operating Temperature	°C	-40°C to +125°C		
Storage Temperature	°C	-40°C to +125°C		
Terminating Impedance	-	50Ω/0 pF		


Electrostatic Sensitive Device. Handle with precaution.

MARKING:

- 434.00 (434.0 Frequency in MHz)
- AF ZYX (ZY: Date code Z for month from A to L; Y for year, i.e. 4 for 2004
X: Traceability code)


PIN NO.	CONNECTIONS
2	Input
5	Output
All Others	Ground

OUTLINE DRAWING:

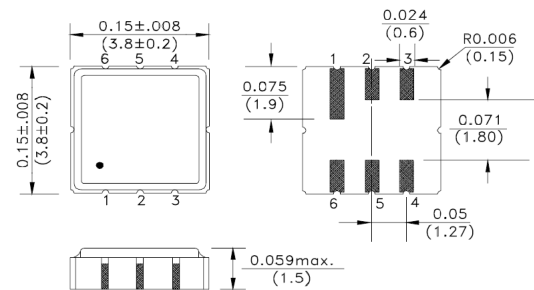


Dimensions: inch (mm)

FREQUENCY RESPONSE:

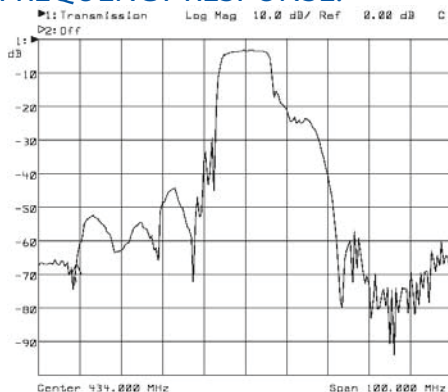

TEST CIRCUIT:

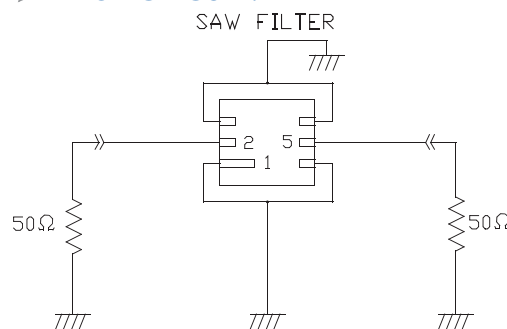

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ABRACON:](#)

[AFS434S3-T](#)