



QorIQ T1024/14 and T1023/13 Communications Processors

Next-generation system-on-chip (SoC) for low-cost enterprise and service provider edge and network control applications

TARGET APPLICATIONS

- ▶ Wired and wireless branch routers
- ▶ WLAN 11ac enterprise access points
- ▶ Service provider WLAN access points
- ▶ Unified threat management gateways
- ▶ Multifunction printers
- ▶ Router and switch controllers
- ▶ Line card controllers
- ▶ Industrial automation and computing, single board computers
- ▶ Aerospace and defense ruggedized network equipment

The QorIQ T1024/23 communications processors combine single or dual 64-bit cores, built on Power Architecture® technology, with high-performance Data Path Acceleration Architecture (DPAA) and network peripheral bus interfaces required for networking and telecommunications applications. The T1024 and T1014 processors come in a full featured 23 x 23 mm package which provides scalable pin compatibility with the quad-core T1042 processor, and even the eight-core T2081 processor, for price and power scaling with a single system design. The T1023 and T1013 processors are interfaces and power-optimized SoCs designed to deliver impressive

single- or dual-core performance for cost and power sensitive networking systems. Both versions offer an excellent software compatible 64-bit and I/O upgrade path for the popular QorIQ P10XX family of 32-bit communications processors.

SOFTWARE AND TOOL SUPPORT

With the help of our partner network, we deliver a wide range of tools, run-time software, reference solutions and services to accelerate your designs.

- ▶ CodeWarrior Development Studio for Power Architecture technology
- ▶ Proprietary QorIQ Linux® SDK
- ▶ VortiQa application software
 - VortiQa application identification software (AIS)
 - Enterprise software for networking
 - VortiQa open network switch software
 - VortiQa open network director software




- Professional services and support
 - Commercial services
 - Linux SDK support package
 - Reference design software (RDS) support package
- Third-party software and tools
 - Enea, Green Hills, Mentor Graphics and Wind River

QorIQ P1020 AND T102X PROCESSORS COMPARISON TABLE

	P1020/11	T1023/13	T1024/14	T1042
Core	1-2 x e500v2	1-2 x e5500	1-2 x e5500	4 x e5500
Power ISA	32-bit	64-bit	64-bit	64-bit
Max MHz	800	1400	1400	1400
L2 Backside Cache	–	256 KB	256 KB	256 KB
Platform Cache	256 KB	256 KB	256 KB	256 KB
DDR Type and Speed	2/3 1333MTs	3L/4 1600MTs	3L/4 1600MTs	3L/4 1600MTs
DDR Speed	to 1333MTs	to 1600MTs	to 1600MTs	to 1600MTs
DDR Width	36 b	36 b	36 b/72 b	36 b/72 b
SerDes	4	4	4	8
PCIe Lanes	2 x 1 v1	3 x 1 v2	3 x 1 v2	4 x 1 v2
GbE	up to 3	up to 4	up to 4	up to 5
10GbE I/O	–	1	1	–
MACSEC	–	All ports	All ports	All ports
Hardware Offload	–	DPAA	DPAA	DPAA
Crypto	SEC 3.x	SEC 5.x	SEC 5.x	SEC 5.x
Pattern Matching	–	–	–	Yes
QUICC Engine TDM/HDLC, ISDN, Industrial	Yes	–	Yes	Yes
SATA	–	2.0 x 1	2.0 x 1	2.0 x 2
USB	2.0 x 2	2.0 x 2 w Phy	2.0 x 2 w Phy	2.0 x 2 w Phy
Lossless Deep Sleep	–	–	Yes	Yes
Auto Response	–	–	Yes	Yes
Display Interface	–	–	Yes	Yes
Single Clock Source	–	Yes	Yes	Yes
Package	31 x 31 PBGA	19 x 19 FCBGA	23 x 23 FCBGA	23 x 23 FCBGA
Pin Compatible	No	No	Yes	Yes

QORIQ T1014 AND T1024 COMMUNICATIONS PROCESSOR

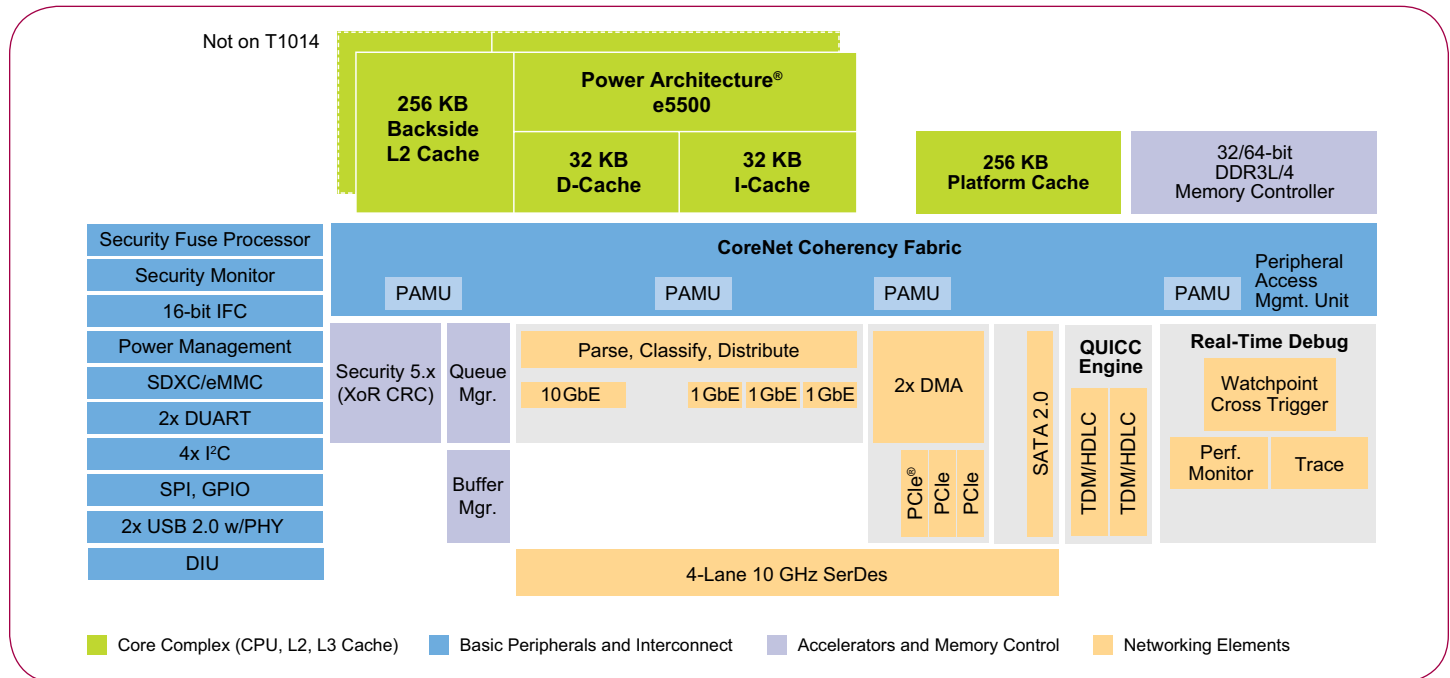

QorIQ T1023/24 PROCESSORS FEATURES LIST

Two or four e5500 single-threaded cores built on Power Architecture technology	<ul style="list-style-type: none"> Up to 1.4 GHz with 64-bit ISA support Low latency, per core, core clocked 256 KB dedicated cache Hybrid 32-bit mode to support legacy software and transition to a 64-bit architecture Nap, wait and doze low-power modes
CoreNet platform cache	<ul style="list-style-type: none"> 256 KB shared platform cache for stashing support
Hierarchical interconnect fabric	<ul style="list-style-type: none"> CoreNet fabric supporting coherent and non-coherent transactions with prioritization and bandwidth allocation amongst CoreNet endpoints QMAN fabric supporting packet-level queue management and quality of service
64-bit DDR3L/4 SDRAM memory controller with ECC support	<ul style="list-style-type: none"> 32-bit or 64-bit low power DDR up to 1600 MT/s
DPAA incorporating acceleration for the following functions	<ul style="list-style-type: none"> Full L2/3 tunneling and en/decrypt offload support for functions such as WLAN CAPWAP/DTLS secure wired links Packet parsing, classification and distribution Queue management for scheduling, packet sequencing and congestion management Hardware buffer management for buffer allocation and de-allocation Cryptography acceleration (SEC 5.x)
SerDes	<ul style="list-style-type: none"> Four lanes at up to 10 Gbit/s Supports SGMII, 2.5 Gbit SGMII, QSGMII, XFI, 10G BASE-KR, PCI Express® and SATA
Ethernet interfaces	<ul style="list-style-type: none"> Up to 4 x Ethernet MACs
QUICC Engine module	<ul style="list-style-type: none"> Integrated support for legacy WAN protocols TDM, HDLC, UART, ISDN and industrial protocols
High-speed peripheral interfaces	<ul style="list-style-type: none"> Three PCI Express 2.0 controller
Additional peripheral interfaces	<ul style="list-style-type: none"> One serial ATA (SATA 2.0) controller Two high-speed USB 2.0 controllers with integrated PHYs Enhanced secure digital host controller (SD/MMC/eMMC) Enhanced serial peripheral interface Two I²C controllers Four UARTS Integrated flash controller supporting NAND and NOR flash memory
DMA	<ul style="list-style-type: none"> Dual four channel
Support for hardware virtualization and partitioning enforcement	<ul style="list-style-type: none"> Extra privileged level for hypervisor support
QorIQ trust architecture	<ul style="list-style-type: none"> Secure boot, secure debug, tamper detection, volatile key storage
Single source clocking	<ul style="list-style-type: none"> For BOM cost reduction

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NXP:

<u>T1024RDB-PC</u>	<u>T1014NSN7MQA</u>	<u>T1024NXE7MQA</u>	<u>T1024NXN7MQA</u>	<u>T1024NXN7PQA</u>	<u>T1024NSN7KQA</u>
<u>T1014NXN7PQA</u>	<u>T1024NSN7MQA</u>	<u>T1024NSE7KNA</u>	<u>T1013NXE7MQA</u>	<u>T1014NSE7MQA</u>	<u>T1014NSN7MQPA</u>
<u>T1024NXE7KQA</u>	<u>T1014NXE7PQA</u>	<u>T1023NXN7PQA</u>	<u>T1013NXE7KQA</u>	<u>T1013NXE7PQA</u>	<u>T1023NXN7MQA</u>
<u>T1013NXN7PQA</u>	<u>T1014NSN7PQA</u>	<u>T1024NXE7PQA</u>	<u>T1013NXN7KQA</u>	<u>T1013NXN7MQA</u>	<u>T1023NXE7PQA</u>
<u>T1023NXE7KQA</u>	<u>T1023NXN7KQA</u>	<u>T1023NSE7KQA</u>	<u>T1024NSE7KQPA</u>	<u>T1024NSE7KQA</u>	<u>T1024NSN7KQPA</u>
<u>T1014NSE7KQA</u>	<u>T1013NSE7KQA</u>	<u>T1024NSN7MQPA</u>	<u>T1013NSN7PQA</u>	<u>T1014NXE7MQA</u>	<u>T1024NSE7PQPA</u>
<u>T1013NSN7KQA</u>	<u>T1023NSN7KQA</u>	<u>T1014NSE7MQPA</u>	<u>T1013NSE7MQA</u>	<u>T1023NSE7PQA</u>	<u>T1023NXE7MQA</u>
<u>T1023NSN7PQA</u>	<u>T1023NSE7MQA</u>	<u>T1014NSE7PQA</u>	<u>T1024NSE7MQPA</u>	<u>T1013NSE7PQA</u>	<u>T1024NSE7MQA</u>
<u>T1023NSN7MQA</u>	<u>T1013NSN7MQA</u>				