


General Purpose Power Relays

MKS-X

MK-S-series Relays with AC and DC Load switching Models

- Models for DC Loads can switch 220 VDC, 10 A (resistive).
- Models for AC Loads can switch 250 VAC, 15 A (resistive).
- Lineup includes models with 1FormA and 1FormA+1FormB contact arrangements.
- Models available with operation indicators and built-in test buttons.
- Standards: UL/CSA, IEC (TÜV certification)
- RoHS compliant.

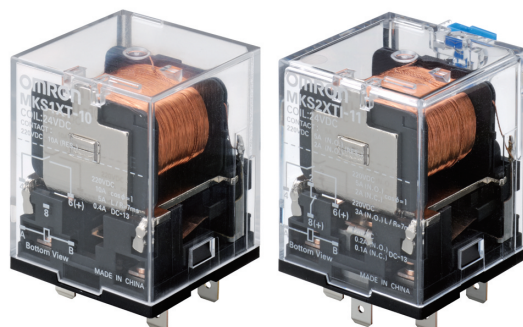

Ordering Information

List of Models

| Type | Contact form | Models for DC Loads | | Models for AC Loads | |
|---|--------------|---------------------|-----------------|---------------------|-----------------|
| | | SPST-NO | SPST-NO/SPST-NC | SPST-NO | SPST-NO/SPST-NC |
| | | Model | Model | Model | Model |
| Standard | | MKS1XT-10 | MKS2XT-11 | MKS1T-10 | MKS2T-11 |
| Built-in Operation Indicators | | MKS1XTN-10 | MKS2XTN-11 | MKS1TN-10 | MKS2TN-11 |
| Test Button | | MKS1XTI-10 | MKS2XTI-11 | MKS1TI-10 | MKS2TI-11 |
| Test Button and Built-in Operation Indicators | | MKS1XTIN-10 | MKS2XTIN-11 | MKS1TIN-10 | MKS2TIN-11 |

Note: 1. When ordering, add the rated voltage to the model number. Rated voltages are given in the coil ratings table in the specifications.
Example: MKS2XTIN-11 AC240

Rated voltage

2. Refer to *Terminal Arrangement and Internal Connections* for all wiring diagrams.

Accessory (Order Separately)

Connecting Socket and Hold-down Clips

| Classifications | | Built-in diode | Socket | Hold-down Clip |
|-------------------------|--------------------------|----------------|-----------|----------------|
| Back-connecting Socket | PCB Mount | No | P7M-06P | PYC-A2 |
| Front-connecting Socket | DIN Track or Panel Mount | No | P7MF-06 | |
| | | Yes | P7MF-06-D | |

- Note:** 1. The P7M-06P, P7MF-06, and P7MF-06-D can be used with models for DC loads with an SPST-NO or SPST-NO/SPST-NC contact form or with models for AC loads with an SPST-NO or SPST-NO/SPST-NC contact form.
2. The P7MF-06-D has a built-in diode and can thus be used only with Relays with DC operating coils. Do not use it with a Relay with an AC operating coil.
3. Refer to *Gang Mounting* in the *Safety Precautions* section for the conditions required to gang mount multiple relays side-by-side.
4. Use the Clips to securely mount the Relay and prevent it from falling due to vibration or shock.

Specifications

■ Contact Ratings

Models for DC Loads

| Contact form Model Load | | SPST-NO | | | SPST-NO/SPST-NC | | |
|--|------------|-----------------|----------------|----------------|-----------------|----------------|----------------|
| | | MKS1XT(I)(N)-10 | | | MKS2XT(I)(N)-11 | | |
| | | Resistive load | Inductive load | | Resistive load | Inductive load | |
| L/R = 7 ms | DC13 class | | L/R = 7 ms | DC13 class | | | |
| Item | NO | Double-break | | | Double-break | | |
| | NC | --- | | | Single-break | | |
| Contact material | | AgSnIn | | | AgSnIn | | |
| Rated load | NO | 10 A, 220 VDC | 5 A, 220 VDC | 0.4 A, 220 VDC | 5 A, 220 VDC | 3 A, 220 VDC | 0.2 A, 220 VDC |
| | NC | --- | | | 2 A, 220 VDC | 0.3 A, 220 VDC | 0.1 A, 220 VDC |
| Rated carry current | NO | 10 A | | | 5 A | | |
| | NC | --- | | | 2 A | | |
| Max. switching voltage | NO | 220 VDC | | | 220 VDC | | |
| | NC | --- | | | | | |
| Max. switching current | NO | 10 A | | | 5 A | | |
| | NC | --- | | | 2 A | | |
| Max. switching capacity (reference value) | NO | 2,200 W | --- | --- | 1,100 W | --- | --- |
| | NC | --- | | | 440 W | --- | --- |

Note: 1. If the L/R of an inductive load exceeds 7 ms with a Model for a DC Load, the arc interruption time must be less than approximately 50 ms to use the Relay. Design the circuit so that the arc interruption time is 50 ms or less.

2. These values apply to a switching frequency of 30 times per minute.

Models for AC Loads

| Contact form Model Load | | SPST-NO | SPST-NO/SPST-NC |
|---|----|----------------|-----------------|
| | | MKS1T(I)(N)-10 | MKS2T(I)(N)-11 |
| | | Resistive load | Resistive load |
| Contact configuration | NO | Double-break | Double-break |
| | NC | --- | Single-break |
| Contact material | | AgSnIn | AgSnIn |
| Rated load | NO | 15 A, 250 VAC | 15 A, 250 VAC |
| | NC | --- | 5 A, 250 VAC |
| Rated carry current | NO | 15 A | 15 A |
| | NC | --- | 5 A |
| Max. switching voltage | NO | 250 VAC | 250 VAC |
| | NC | --- | |
| Max. switching current | NO | 15 A | 15 A |
| | NC | --- | 5 A |
| Max. switching capacity (reference value) | NO | 3,750 VA | 3,750 VA |
| | NC | --- | 1,250 VA |

Note: These values apply to a switching frequency of 20 times per minute.

■ Coil Ratings

| Item | | Rated current (mA) | | Coil resistance (Ω) | Must operate voltage (V) | Must release voltage (V) | Max. voltage (V) | Power consumption (VA, W) |
|-------------------|-----|--------------------|-------|---------------------|---------------------------|--|-----------------------|--|
| Rated voltage (V) | | 50 Hz | 60 Hz | | | | | |
| AC | 24 | 110 | 96.3 | 48.4 | 80% max. of rated voltage | 30% min. of rated voltage at 60 Hz 25% min. of rated voltage at 50 Hz | 110% of rated voltage | Approx. 2.3 VA at 60 Hz Approx. 2.7 VA at 50 Hz |
| | 100 | 26.6 | 23.1 | 760 | | | | |
| | 110 | 24.2 | 21.0 | 932 | | | | |
| | 120 | 22.2 | 19.3 | 1,130 | | | | |
| | 200 | 13.3 | 11.6 | 3,160 | | | | |
| | 220 | 12.1 | 10.5 | 3,550 | | | | |
| | 230 | 11.5 | 10.0 | 4,250 | | | | |
| | 240 | 11.0 | 9.6 | 4,480 | | | | |
| DC | 12 | 126 | | 95 | 15% min. of rated voltage | | | Approx. 1.5 W |
| | 24 | 63.2 | | 380 | | | | |
| | 48 | 32.0 | | 1,500 | | | | |
| | 110 | 13.6 | | 8,060 | | | | |
| | 220 | 6.8 | | 32,200 | | | | |

Note: 1. The rated current and coil resistance are measured at a coil temperature of 23°C with tolerances of +15%/-20% for AC rated current and ±15% for DC coil resistance.

2. Performance characteristic data are measured at a coil temperature of 23°C.

3. The Maximum Voltage is the highest voltage that can be applied to the coil temporarily, not continuously.

4. The rated current is approximately 5 mA higher for Models with Built-in Operation Indicators (DC operating coils).

■ Characteristics

| | | |
|--|-------------------------|--|
| Contact resistance (See note 2) | | 100 mΩ max. |
| Operate time (See note 3) | | AC: 20 ms max. DC: 30 ms max. |
| Release time (See note 3) | | 20 ms max. |
| Max. operating frequency | Mechanical | 18,000 operations/h |
| | Electrical | Models for DC loads: 1,800 times/hour Models for AC loads: 1,200 times/hour |
| Insulation resistance (See note 4) | | 100 MΩ min. |
| Dielectric strength | | 2,500 VAC 50/60 Hz for 1 min. between coil and contacts |
| | | 2,500 VAC 50/60 Hz for 1 min. between contacts of different polarity |
| | | 1,000 VAC 50/60 Hz for 1 min. between contacts of same polarity |
| Vibration resistance | | Destruction: 10 to 55 Hz, 1.0-mm double amplitude Malfunction: 10 to 55 Hz, 1.5-mm double amplitude |
| Shock resistance | | Destruction: 1,000 m/s ² when relay is properly mounted into P7M-06P PCB socket 500m/s ² when relay is properly mounted into P7MF-06(-D) socket Malfunction 100 m/s ² |
| Life expectancy | Mechanical | 1,000,000 operations min. (at 18,000 operations/hr) |
| | Electrical (See note 5) | 100,000 operations min. (at rated load and maximum switching frequency) |
| Minimum permissible load (Reference value. See note 6) | | 10 mA at 24 VDC |
| Ambient operating temperature | | -40°C to 60°C (with no icing or condensation) Note: The range is -25°C to 60°C for models with built-in operation indicators. |
| Ambient operating humidity | | 5% to 85% |
| Weight | | SPST-NO: Approx. 73 g, SPST-NO/SPST-NC: Approx. 82 g |

Note: 1. The values given above are initial values.

2. The contact resistance was measured for 1 A at 5 VDC using the voltage drop method.

3. The operate time was measured with the rated voltage imposed and any contact bounce ignored at an ambient temperature of 23°C.

4. The insulation resistance was measured with a 500-VDC insulation resistance tester at the same places as those used for checking the dielectric strength.

5. The electrical endurance was measured at an ambient temperature of 23°C.

6. P level: $\lambda_{60}=0.1 \times 10^{-6}/\text{operations}$

■ Approved Standards

UL Recognized 
CSA Certified 

| Model | Coil ratings | Contact ratings | | Operations |
|-----------|--------------------------------|-----------------|---|------------|
| MKS1XT□-□ | 12 to 220 VDC 24 to 240 VAC | NO contacts | 10 A, 220 VDC (Resistive) 5 A, 220 VDC L/R ($T_{0.632}$) = 7 ms 0.4 A, 220 VDC L/R ($T_{0.95}$) = 300 ms | 6,000 |
| MKS2XT□-□ | | NO contacts | 5 A, 220 VDC (Resistive) 3 A, 220 VDC L/R ($T_{0.632}$) = 7 ms 0.2 A, 220 VDC L/R ($T_{0.95}$) = 300 ms | |
| | | NC contacts | 2 A, 220 VDC (Resistive) 0.3 A, 220 VDC L/R ($T_{0.632}$) = 7 ms 0.1 A, 220 VDC L/R ($T_{0.95}$) = 300 ms | |
| MKS1T□-□ | | NO contacts | 15 A, 250 VAC (Resistive) | |
| MKS2T□-□ | | NO contacts | 15 A, 250 VAC (Resistive) | |
| | | NC contacts | 5 A, 250 VAC (Resistive) | |


IEC Standard/TÜV Certification: IEC61810-1 (Certification No. R50104853)

| Model | Coil ratings | Contact ratings | | Operations |
|-----------|---|-----------------|--|------------|
| MKS1XT□-□ | 12, 24, 48, 110, 220 VDC 24, 100, 110, 120, 200, 220, 230, 240 VAC | NO contacts | DC-1: 10 A, 220 VDC 5 A, 220 VDC L/R (T _{0.632}) = 7 ms DC-13: 0.4 A, 220 VDC | 100,000 |
| MKS2XT□-□ | | NO contacts | DC-1: 5 A, 220 VDC 3 A, 220 VDC L/R (T _{0.632}) = 7 ms DC-13: 0.2 A, 220 VDC | |
| | | NC contacts | DC-1: 2 A, 220 VDC 0.3 A, 220 VDC L/R (T _{0.632}) = 7 ms DC-13: 0.1 A, 220 VDC | |
| MKS1T□-□ | | NO contacts | AC-1: 15 A, 250 VAC 50/60 Hz | |
| MKS2T□-□ | | NO contacts | AC-1: 15 A, 250 VAC 50/60 Hz | |
| | | NC contacts | AC-1: 5 A, 250 VAC 50/60 Hz | |


Engineering Data

Maximum Switching Power


MKS1XT□-10

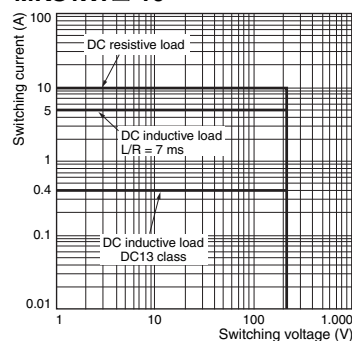


MKS2XT□-11

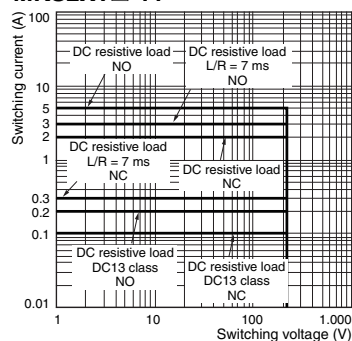

MKS1T□-10

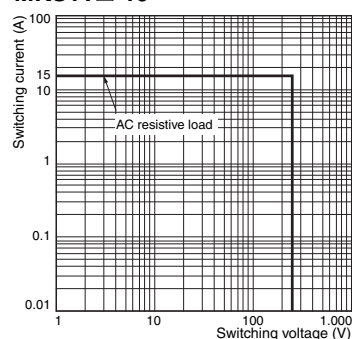


MKS2T□-11

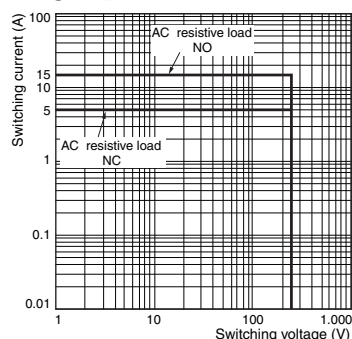

Ambient Temperature vs. Pick-up and Drop out Voltage


MKS2XT-11

AC Specification (60 Hz)

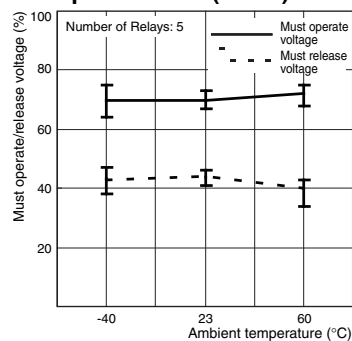


MKS2XT-11

DC Specification

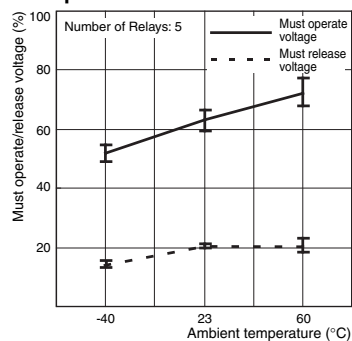


Inductive Load Switching Power (Models for DC Loads)

MKS1XT□-10

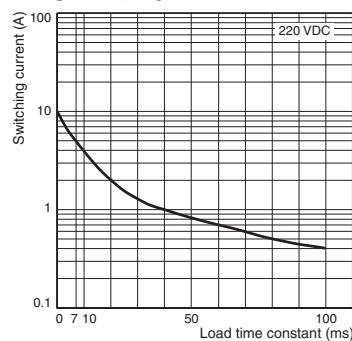

MKS2XT□-11

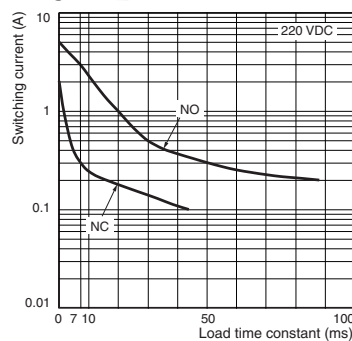

Dimensions

(Unit: mm)

Models for DC Loads

Standard Models

MKS1XT-10 MKS2XT-11

Models with Built-in Operation Indicators

MKS1XTN-10 MKS2XTN-11




Models for AC Loads

Standard Models

MKS1T-10 MKS2T-11

Models with Built-in Operation Indicators

MKS1TN-10 MKS2TN-11







Models for DC Loads

Models with Test Button

MKS1XTI-10 MKS2XTI-11

Models with Test Button and Built-in Operation Indicators

MKS1XTIN-10 MKS2XTIN-11





Terminal Arrangement and Internal Connection (Bottom View)

| MKS1XT-10 MKS1XTI-10 | MKS1XTN-10 MKS1XTIN-10 | | MKS2XT-11 MKS2XTI-11 | MKS2XTN-11 MKS2XTIN-11 | |
|-------------------------|---------------------------|------------------|-------------------------|---------------------------|------------------|
| | DC specification | AC specification | | DC specification | AC specification |
| | | | | | |
| MKS1T-10 MKS1TI-10 | MKS1TN-10 MKS1TIN-10 | | MKS2T-11 MKS2TI-11 | MKS2TN-11 MKS2TIN-11 | |
| | DC specification | AC specification | | DC specification | AC specification |
| | | | | | |



Note: 1. Wire properly using the correct coil polarity.

2. The contact terminals on Models for DC Loads have polarity. Wire properly using the correct polarity.

Connecting Socket **Back-connecting Socket** **P7M-06P**

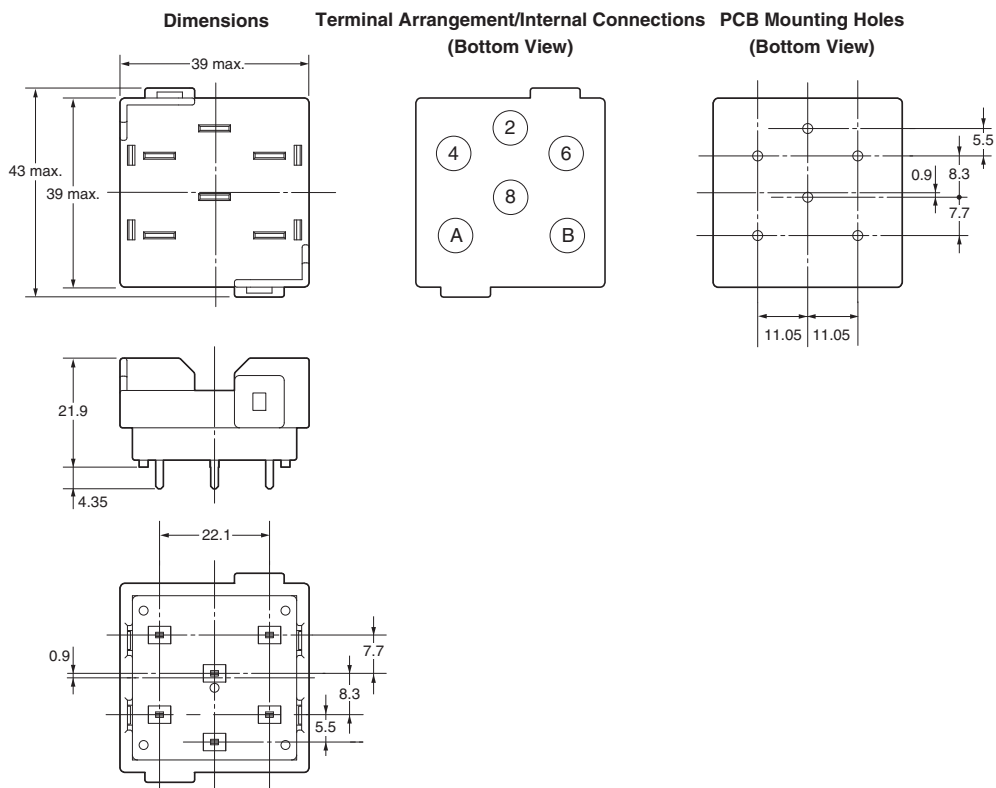


Front-connecting Socket **P7MF-06** **P7MF-06-D**

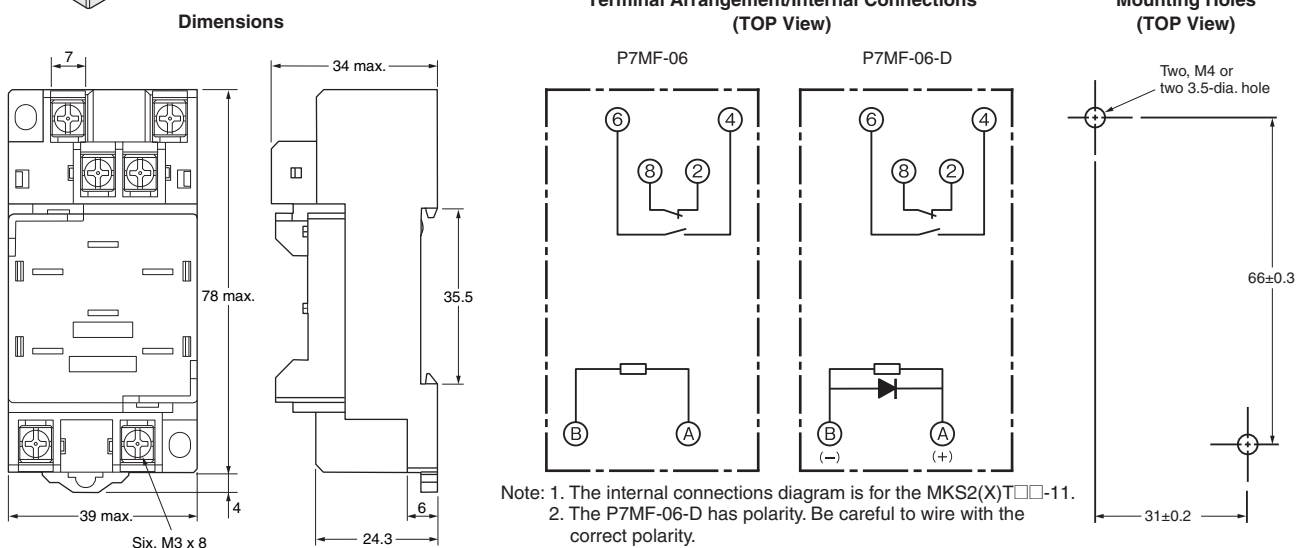

Hold-down Clip

PYC-A2



One Set (Two Clips)



Note: The minimum order for the PYC-A2 is ten clips.



Socket Mounting Height

P7M-06P

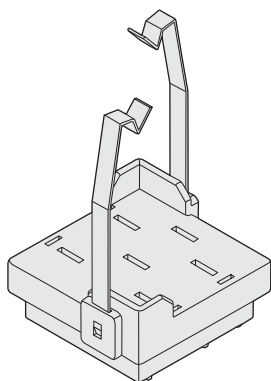

P7MF-06

P7MF-06-D

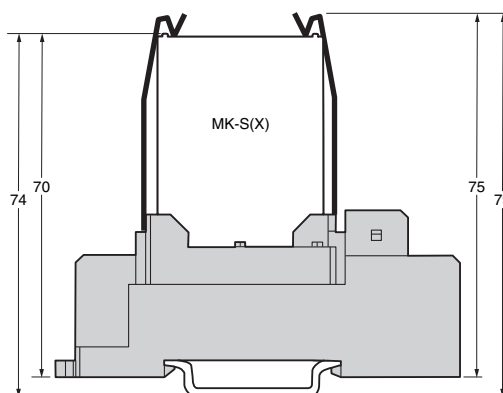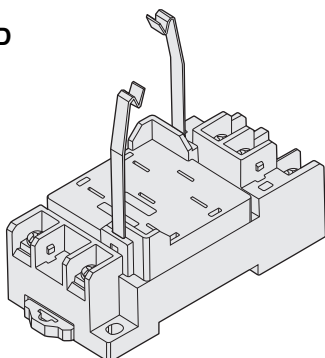

Safety Precautions

Be sure to read the precautions and information common to all electromechanical relays, contained in the Technical User's Guide, "Electromechanical Relays, Technical Information" for correct use.

Precautions for Correct Use

Installation

- Models for DC loads (i.e., models with "X" in the model number) have permanent magnets built into the insulating block. If a permanent magnet or other magnetic body comes near the Relay, magnetic interference will occur with the built-in permanent magnet and the contact switching capacity will be decreased.
- Models for AC loads do not contain a permanent magnet.
- When mounting a P7MF-06(-D) Front-mounting Socket to a DIN Track, attach PFP-M End Plates on both sides of the Socket to prevent it from moving.



Gang Mounting

Conditions for mounting multiple MKS-X relays on the same DIN rail.

| Relay | Rated current of Relay | Socket | |
|---------------------|------------------------|------------------------|-------------------------|
| | | Back-Connecting Socket | Front-Connecting Socket |
| Models for DC Loads | 10A | ○ | ○ |
| Models for AC Loads | 15A | ○ | * |

* Gang mounting of the Front-Mounting Sockets is not possible if the contact carry current exceeds 10A. Provide space on both the right and left sides of the Sockets.

The mounting pitch is given in the following diagram.

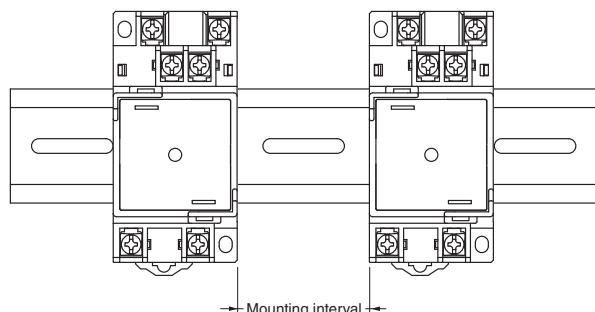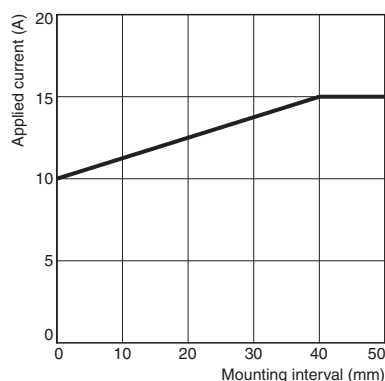

Wiring

- The contact terminals on Models for DC Loads (i.e., models with "X" in the model number) have polarity. Wiring with incorrect polarity may result in inability to turn OFF the Relay or loss of functionality.
- Be sure to check polarity when wiring DC coil MKS-X relays with built-in operation indicators.

Operating Environment

Do not use the Relay in environments with combustible gas. Doing so may result in explosion due to arcing.

Storage

Models for DC Loads (i.e., models with "X" in the model number) are magnetized because they have a built-in magnet to deflect and extinguish the arc. Do not install the Relay near IC cards or other items that may be adversely affected by magnetism.

Usage

Use the Relay mounted in the P7M-06P or P7MF-06(-D) Socket.

Test Button


- Turn OFF the power supply before operating the test button. Always return the test button to the original position after you use it.
- Do not use the test button as a switch.
- The durability of the test button is 100 operations minimum.

The circuit can be checked using either of two modes.


Test Button

DC specification: Blue


AC specification: Red



Normal




Mode 1
(momentary)



Press the button
for operation.
(No tool is required.)

Mode 2
(locked)



Lock the contacts by
pressing down on the
button and turning it.

Test Button Applications

Example: Checking operation of Relays and sequence circuits.

MEMO

Terms and Conditions of Sale

1. **Offer; Acceptance.** These terms and conditions (these "Terms") are deemed part of all quotes, agreements, purchase orders, acknowledgments, price lists, catalogs, manuals, brochures and other documents, whether electronic or in writing, relating to the sale of products or services (collectively, the "Products") by Omron Electronics LLC and its subsidiary companies ("Omron"). Omron objects to any terms or conditions proposed in Buyer's purchase order or other documents which are inconsistent with, or in addition to, these Terms.
2. **Prices; Payment Terms.** All prices stated are current, subject to change without notice by Omron. Omron reserves the right to increase or decrease prices on any unshipped portions of outstanding orders. Payments for Products are due net 30 days unless otherwise stated in the invoice.
3. **Discounts.** Cash discounts, if any, will apply only on the net amount of invoices sent to Buyer after deducting transportation charges, taxes and duties, and will be allowed only if (i) the invoice is paid according to Omron's payment terms and (ii) Buyer has no past due amounts.
4. **Interest.** Omron, at its option, may charge Buyer 1-1/2% interest per month or the maximum legal rate, whichever is less, on any balance not paid within the stated terms.
5. **Orders.** Omron will accept no order less than \$200 net billing.
6. **Governmental Approvals.** Buyer shall be responsible for, and shall bear all costs involved in, obtaining any government approvals required for the importation or sale of the Products.
7. **Taxes.** All taxes, duties and other governmental charges (other than general real property and income taxes), including any interest or penalties thereon, imposed directly or indirectly on Omron or required to be collected directly or indirectly by Omron for the manufacture, production, sale, delivery, importation, consumption or use of the Products sold hereunder (including customs duties and sales, excise, use, turnover and license taxes) shall be charged to and remitted by Buyer to Omron.
8. **Financial.** If the financial position of Buyer at any time becomes unsatisfactory to Omron, Omron reserves the right to stop shipments or require satisfactory security or payment in advance. If Buyer fails to make payment or otherwise comply with these Terms or any related agreement, Omron may (without liability and in addition to other remedies) cancel any unshipped portion of Products sold hereunder and stop any Products in transit until Buyer pays all amounts, including amounts payable hereunder, whether or not then due, which are owing to it by Buyer. Buyer shall in any event remain liable for all unpaid accounts.
9. **Cancellation; Etc.** Orders are not subject to rescheduling or cancellation unless Buyer indemnifies Omron against all related costs or expenses.
10. **Force Majeure.** Omron shall not be liable for any delay or failure in delivery resulting from causes beyond its control, including earthquakes, fires, floods, strikes or other labor disputes, shortage of labor or materials, accidents to machinery, acts of sabotage, riots, delay in or lack of transportation or the requirements of any government authority.
11. **Shipping; Delivery.** Unless otherwise expressly agreed in writing by Omron:
 - a. Shipments shall be by a carrier selected by Omron; Omron will not drop ship except in "break down" situations.
 - b. Such carrier shall act as the agent of Buyer and delivery to such carrier shall constitute delivery to Buyer;
 - c. All sales and shipments of Products shall be FOB shipping point (unless otherwise stated in writing by Omron), at which point title and risk of loss shall pass from Omron to Buyer; provided that Omron shall retain a security interest in the Products until the full purchase price is paid;
 - d. Delivery and shipping dates are estimates only; and
 - e. Omron will package Products as it deems proper for protection against normal handling and extra charges apply to special conditions.
12. **Claims.** Any claim by Buyer against Omron for shortage or damage to the Products occurring before delivery to the carrier must be presented in writing to Omron within 30 days of receipt of shipment and include the original transportation bill signed by the carrier noting that the carrier received the Products from Omron in the condition claimed.
13. **Warranties.** (a) **Exclusive Warranty.** Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied. (b) **Limitations.** OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) **Buyer Remedy.** Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty. See <http://www.omron247.com> or contact your Omron representative for published information.
14. **Limitation on Liability; Etc.** OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY. Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.
15. **Indemnities.** Buyer shall indemnify and hold harmless Omron Companies and their employees from and against all liabilities, losses, claims, costs and expenses (including attorney's fees and expenses) related to any claim, investigation, litigation or proceeding (whether or not Omron is a party) which arises or is alleged to arise from Buyer's acts or omissions under these Terms or in any way with respect to the Products. Without limiting the foregoing, Buyer (at its own expense) shall indemnify and hold harmless Omron and defend or settle any action brought against such Companies to the extent based on a claim that any Product made to Buyer specifications infringed intellectual property rights of another party.
16. **Property; Confidentiality.** Any intellectual property in the Products is the exclusive property of Omron Companies and Buyer shall not attempt to duplicate it in any way without the written permission of Omron. Notwithstanding any charges to Buyer for engineering or tooling, all engineering and tooling shall remain the exclusive property of Omron. All information and materials supplied by Omron to Buyer relating to the Products are confidential and proprietary, and Buyer shall limit distribution thereof to its trusted employees and strictly prevent disclosure to any third party.
17. **Export Controls.** Buyer shall comply with all applicable laws, regulations and licenses regarding (i) export of products or information; (ii) sale of products to "forbidden" or other proscribed persons; and (iii) disclosure to non-citizens of regulated technology or information.
18. **Miscellaneous.** (a) **Waiver.** No failure or delay by Omron in exercising any right and no course of dealing between Buyer and Omron shall operate as a waiver of rights by Omron. (b) **Assignment.** Buyer may not assign its rights hereunder without Omron's written consent. (c) **Law.** These Terms are governed by the law of the jurisdiction of the home office of the Omron company from which Buyer is purchasing the Products (without regard to conflict of law principles). (d) **Amendment.** These Terms constitute the entire agreement between Buyer and Omron relating to the Products, and no provision may be changed or waived unless in writing signed by the parties. (e) **Severability.** If any provision hereof is rendered ineffective or invalid, such provision shall not invalidate any other provision. (f) **Setoff.** Buyer shall have no right to set off any amounts against the amount owing in respect of this invoice. (g) **Definitions.** As used herein, "including" means "including without limitation"; and "Omron Companies" (or similar words) mean Omron Corporation and any direct or indirect subsidiary or affiliate thereof.

Certain Precautions on Specifications and Use

1. **Suitability of Use.** Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases but the following is a non-exhaustive list of applications for which particular attention must be given:
 - (i) Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this document.
 - (ii) Use in consumer products or any use in significant quantities.
 - (iii) Energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations.
 - (iv) Systems, machines and equipment that could present a risk to life or property. Please know and observe all prohibitions of use applicable to this Product.
 NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON'S PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.
2. **Programmable Products.** Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.
3. **Performance Data.** Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.
4. **Change in Specifications.** Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.
5. **Errors and Omissions.** Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

Note: This datasheet is provided as a guideline for selecting products. Do not use this document to operate the Unit.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.



OMRON ELECTRONICS LLC • THE AMERICAS HEADQUARTERS

Schaumburg, IL USA • 847.843.7900 • 800.556.6766 • www.omron247.com

OMRON CANADA, INC. • HEAD OFFICE

Toronto, ON, Canada • 416.286.6465 • 866.986.6766 • www.omron247.com

OMRON ELETRÔNICA DO BRASIL LTDA • HEAD OFFICE

São Paulo, SP, Brasil • 55.11.2101.6300 • www.omron.com.br

OMRON ELECTRONICS MEXICO SA DE CV • HEAD OFFICE

Apodaca, N.L. • 52.811.156.99.10 • 001.800.556.6766 • mela@omron.com

OMRON ARGENTINA • SALES OFFICE

Cono Sur • 54.11.4783.5300

OMRON CHILE • SALES OFFICE

Santiago • 56.9.9917.3920

OTHER OMRON LATIN AMERICA SALES

54.11.4783.5300

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron:

[MKS2T-11 AC100](#) [MKS2T-11 AC110](#) [MKS2T-11 AC120](#) [MKS2T-11 AC200](#) [MKS2T-11 AC220](#) [MKS2T-11 AC230](#)
[MKS2T-11 AC24](#) [MKS2T-11 AC240](#) [MKS2T-11 DC110](#) [MKS2T-11 DC12](#) [MKS2T-11 DC220](#) [MKS2T-11 DC24](#)
[MKS2T-11 DC48](#) [MKS2TI-11 AC100](#) [MKS2TI-11 AC110](#) [MKS2TI-11 AC120](#) [MKS2TI-11 AC200](#) [MKS2TI-11 AC220](#)
[MKS2TI-11 AC230](#) [MKS2TI-11 AC24](#) [MKS2TI-11 AC240](#) [MKS2TI-11 DC110](#) [MKS2TI-11 DC12](#) [MKS2TI-11 DC220](#)
[MKS2TI-11 DC24](#) [MKS2TI-11 DC48](#) [MKS2TIN-11 AC100](#) [MKS2TIN-11 AC110](#) [MKS2TIN-11 AC120](#) [MKS2TIN-11](#)
[AC200](#) [MKS2TIN-11 AC220](#) [MKS2TIN-11 AC230](#) [MKS2TIN-11 AC240](#) [MKS2TIN-11 DC110](#) [MKS2TIN-11 DC12](#)
[MKS2TIN-11 DC220](#) [MKS2TIN-11 DC24](#) [MKS2TIN-11 DC48](#) [MKS2TN-11 AC100](#) [MKS2TN-11 AC110](#) [MKS2TN-11](#)
[AC120](#) [MKS2TN-11 AC200](#) [MKS2TN-11 AC220](#) [MKS2TN-11 AC230](#) [MKS2TN-11 AC24](#) [MKS2TN-11 AC240](#)
[MKS2TN-11 DC110](#) [MKS2TN-11 DC12](#) [MKS2TN-11 DC220](#) [MKS2TN-11 DC24](#) [MKS2TN-11 DC48](#) [MKS1TIN-10](#)
[DC24](#) [MKS1TN-10 DC110](#) [MKS1TIN-10 DC110](#) [MKS1TI-10 DC24](#) [MKS1TN-10 DC24](#) [MKS1TI-10 AC220](#) [MKS1T-](#)
[10 AC110](#) [MKS1TIN-10 AC120](#) [MKS1TN-10 DC12](#) [MKS1TI-10 AC230](#) [MKS1TN-10 DC48](#) [MKS1T-10 AC230](#)
[MKS1TI-10 AC110](#) [MKS1TIN-10 AC220](#) [MKS1TIN-10 AC200](#) [MKS1T-10 AC220](#) [MKS1TI-10 DC48](#) [MKS1TI-10](#)
[AC120](#) [MKS1TIN-10 AC230](#) [MKS1TN-10 AC220](#) [MKS1TN-10 AC110](#) [MKS1TN-10 AC230](#) [MKS1TI-10 AC240](#)
[MKS1T-10 AC200](#) [MKS1TIN-10 DC48](#) [MKS1TI-10 DC220](#) [MKS1TIN-10 AC100](#) [MKS1TI-10 DC110](#) [MKS1TN-10](#)
[AC240](#) [MKS1TN-10 AC100](#) [MKS1TN-10 AC24](#) [MKS1TI-10 AC24](#) [MKS1TN-10 AC200](#) [MKS1TI-10 DC12](#) [MKS1TIN-](#)
[10 DC12](#) [MKS1TN-10 DC220](#) [MKS1TI-10 AC100](#) [MKS1TI-10 AC200](#)