


A6ER

Piano DIP Switch

DIP Switch with a variety of assortment of Poles and Actuators in Piano Types



- The sealed bottom prevents flux penetration.
- Gold-plated contacts and terminals ensure high reliability.

RoHS Compliant

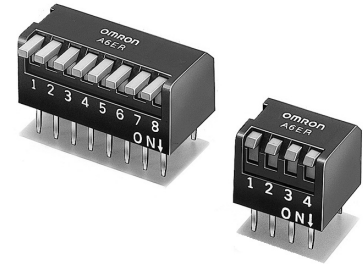

List of Models

● Models in Tube Packages

| Type (actuator color) | | Piano actuator (short) (Orange) | Piano actuator (long) (Orange) |
|-----------------------|-------------------|---|---|
| No. of poles | Quantity per tube |  |  |
| 2 | 70 | A6ER-2101 | A6ER-2104 |
| 3 | 50 | A6ER-3101 | A6ER-3104 |
| 4 | 39 | A6ER-4101 | A6ER-4104 |
| 5 | 32 | A6ER-5101 | A6ER-5104 |
| 6 | 27 | A6ER-6101 | A6ER-6104 |
| 7 | 24 | A6ER-7101 | A6ER-7104 |
| 8 | 21 | A6ER-8101 | A6ER-8104 |
| 9 | 19 | A6ER-9101 | A6ER-9104 |
| 10 | 17 | A6ER-0101 | A6ER-0104 |



Note: Order in multiples of the package quantity.

Ratings / Characteristics

| | | |
|------------------------------------|---|--------------------------------------|
| Rating (resistive load) | 25 mA at 24 VDC 10 μ A (minimum current) at 3.5 VDC | |
| Ambient operating temperature | -20 to +70°C at 60% max. (with no icing or condensation) | |
| Ambient operating humidity | 35% to 95% (at +5 to +35°C) | |
| Insulation resistance | 100 M Ω min. (at 250 VDC with insulation tester) | |
| Contact resistance (initial value) | 200 m Ω max. | |
| Dielectric strength | Between terminals | 500 VAC for 1 min |
| Vibration resistance | Malfunction | 10 to 55 Hz, 1.5-mm double amplitude |
| Shock resistance | Malfunction | 300 m/s ² min. |
| Durability | Electrical | 1,000 operations min. |
| Washing | Not possible | |
| Degree of protection | IEC IP40 | |
| Operating force | 0.29 to 9.8 N {30 to 1,000 gf} | |
| Weight | 1.01 g (2 poles), 1.51 g (4 poles), 2.00 g (6 poles), 2.51 g (8 poles), 3.02 g (10 poles) | |



Dimensions (Unit: mm)

● Piano Actuator (Short) A6ER-□101



| No. of poles | Model | | Dimension A |
|--------------|---------------|--------------|-------------|
| | Piano (short) | Piano (long) | |
| 2 | A6ER-2101 | A6ER-2104 | 6.64 |
| 3 | A6ER-3101 | A6ER-3104 | 9.18 |
| 4 | A6ER-4101 | A6ER-4104 | 11.72 |
| 5 | A6ER-5101 | A6ER-5104 | 14.26 |
| 6 | A6ER-6101 | A6ER-6104 | 16.80 |
| 7 | A6ER-7101 | A6ER-7104 | 19.34 |
| 8 | A6ER-8101 | A6ER-8104 | 21.88 |
| 9 | A6ER-9101 | A6ER-9104 | 24.42 |
| 10 | A6ER-0101 | A6ER-0104 | 26.96 |


● Piano Actuator (Long) A6ER-□104

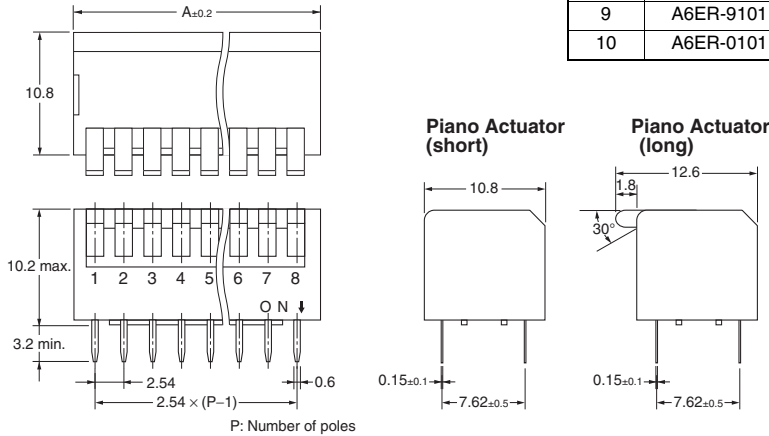

Note: Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.

Internal Connections

Contact Form (Top View)



Safety Precautions

Be sure to read the Safety precautions common to all DIP Switches for correct use.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Omron:](#)

[A6ER-2101](#) [A6ER-3101](#) [A6ER-4101](#) [A6ER-5101](#) [A6ER-6101](#) [A6ER-7101](#) [A6ER-8101](#) [A6ER-0101](#) [A6ER-2104](#)
[A6ER-3104](#) [A6ER-5104](#) [A6ER-6104](#) [A6ER-7104](#) [A6ER-8104](#) [A6ER-9104](#) [A6ER-0104](#) [A6ER-4104](#)