G3VN-41PR11 MOS FET Relays

Smallest Class in market, USOP Package MOS FET Relays with Low Output Capacitance and ON Resistance ($CxR=5pF\cdot\Omega$)

Dielectric strength of 500Vrms between I/O.




Note: The actual product is marked differently from the image shown here.

RoHS Compliant

Refer to "Common Precautions".

■Application Examples

- Semiconductor test equipment
 Test & measurement
- Communication equipment
 Data loggers



Note: The actual product is marked differently from the image shown here.

Terminal Arrangement/Internal Connections

■List of Models

equipment

Package type	Contact form	Terminals	Load voltage (peak value) (See note.)	Model	Minimum package quantity Number per tape & reel	
USOP4	1a (SPST-NO)	Surface-mounting terminals		G3VM-41PR11	-	
			40V	G3VM-41PR11 (TR05)	500	
				G3VM-41PR11 (TR)	1,500	

Note 1. Ask you OMRON representative for orders under 1,500 pcs or 500 pcs.

Tape-cut USOPs are packaged without humidity resistance. Use manual soldering to mount them. Refer to common precautions.
 The AC peak and DC value is given for the load voltages.

■Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Rating	Unit	Measurement conditions	
LED forward current	IF	50	mA		
ED forward current reduction rate	∆IF/°C	-0.5	mA/°C	Ta≥25°C	
JED forward current reduction rate	Vr	5	V		
Connection temperature	TJ	125	°C		
Load voltage (AC peak/DC)	Voff	40	V		
O Continuous load current (AC peak/DC)	lo	140	mA		
ON current reduction rate	∆lo/°C	-1.4	mA°C	Ta≥25°C	
Pulse ON current	lop	420	mA	t=100ms, Duty=1/10	
Connection temperature	TJ	125	°C		
Dielectric strength between I/O (See note 1.)	VI-o	500	Vrms	AC for 1 min	Note: 1.The dielectric strength the input and output w
Ambient operating temperature	Та	-40~+85	°C	With no icing or condensation	checked by applying v between all pins as a
Ambient storage temperature	Tstg	-40~+125	°C	With no icing or condensation	the LED side and all p
Soldering temperature	-	260	°C	10s	group on the light-rec

■Electrical Characteristics (Ta = 25°C)

Item		Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions	
Input	LED forward voltage	VF	1.0	1.15	1.3	V	IF=10mA	Note: 2. Turn-ON and Turn-OFF Times
	Reverse current	IR	-	-	10	μA	VR=5V	
	Capacity between terminals	Ст	-	15	-	pF	V=0, f=1MHz	
	Trigger LED forward current	IFT	-	1.0	3	mA	lo=100mA	
0	Maximum resistance with output ON	Ron	-	7	10	Ω	IF=5mA, Io=140mA, t<1s	ž
utp	Current leakage when the relay is open	ILEAK	-	-	1	nA	Voff=40V	π
Lt	Capacity between terminals	COFF	-	0.7	1.3	pF	V=0, f=100MHz, t<1s	IF
Capacity between I/O terminals		CI-O	-	0.4	-	pF	f=1MHz, Vs=0V	
Insulation resistance between I/O terminals		Ri-o	1000	-	-	MΩ	VI-0=500VDC, RoH≤60%	Vout +10% 90%
Turn-ON time		ton	-	0.04	0.2	ms	IF=5mA, RL=200Ω,	
Turn-OFF time		toff	-	0.14	0.2	ms	VDD=20V (See note 2.)	

U S O P


G3VM-41PR11

Recommended Operating Conditions


Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	Vdd	-	-	32	V
Operating LED forward current	lF	5	7.5	20	mA
Continuous load current (AC peak/DC)	lo	-	-	140	mA
Ambient operating temperature	Та	-20	_	65	°C


Engineering Data

LED forward current vs. Ambient temperature




Continuous load current vs. **On-state voltage**







Output terminal capacitance

COFF/COFF(ov) vs. Load voltage









Ambient temperature Ta (°C)


On-state resistance vs. Ambient temperature




Turn ON, Turn OFF time vs. Ambient temperature




LED forward current vs. LED forward voltage



Trigger LED forward current vs. Ambient temperature



Current leakage vs. Load voltage



■Safety Precautions


•Refer to "Common Precautions" for all G3VM models.

U S O P

Apperance/Dimensions

■Appearance


USOP (Ultra Small Outline Package) USOP4



Note: The actual product is marked differently from the image shown here.

Dimensions

(Unit: mm)

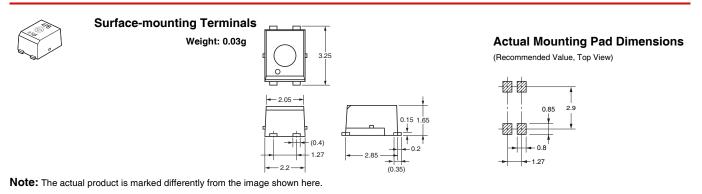

Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
 Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

OMRON Corporation ELECTRONIC AND MECHANICAL COMPONENTS COMPANY Contact: www.omron.com/ecb

Cat. No. K207-E1-02 1112(0912)(O)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron: G3VM-41PR11