

G3VM-355JR

MOS FET Relays

SPST-NO + SPST-NC MOS FET Relay in a Single SOP Package.


- SPST-NO/SPST-NC models with SOP 8-pin package now available in the 350-V load voltage series.

RoHS compliant

Application Examples

- Broadband systems
- Test & Measurement equipment
- Data loggers
- Amusement machines

Terminal Arrangement/Internal Connections

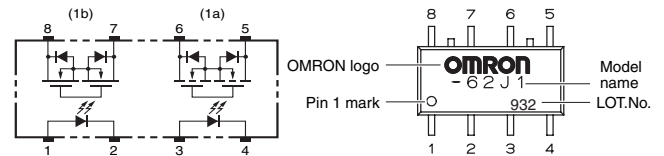

Note: The actual product is marked differently from the image shown here.

List of Models

Package type	Contact form	Terminals	Load voltage (peak value) *	Model	Minimum package quantity	
					Number per tube	Number per tape and reel
SOP8	1a1b (SPST-NO/SPST-NC)	Surface-mounting Terminals	350 V	G3VM-355JR	50	-
				G3VM-355JR (TR)	-	2,500

* The AC peak and DC value are given for the load voltage.

Absolute Maximum Ratings (Ta = 25°C)


Item	Symbol	Rating	Unit	Measurement conditions
Input	LED forward current	IF	50	mA
	Repetitive peak LED forward current	IFP	1	A
	LED forward current reduction rate	$\Delta I_F / ^\circ\text{C}$	-0.5	mA/°C
	LED reverse voltage	VR	5	V
	Connection temperature	TJ	125	°C
Output	Load voltage (AC peak/DC)	VOFF	350	V
	Continuous load current (AC peak/DC)	IO	120	mA
	ON current reduction rate	$\Delta I_O / ^\circ\text{C}$	-1.2	mA/°C
	Connection temperature	TJ	125	°C
	Dielectric strength between I/O (See note 1.)	VI-O	1500	Vrms
Ambient operating temperature		Ta	-40 to +85	°C
Ambient storage temperature		Tstg	-55 to +125	°C
Soldering temperature		-	260	°C

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Electrical Characteristics (Ta = 25°C)

Item		Symbol	Minimum	Typical	Maximum	Unit	Measurement conditions
Input	LED forward voltage	V _F	1.0	1.15	1.3	V	I _F = 10 mA
	Reverse current	I _R	-	-	10	μA	V _R = 5 V
	Capacity between terminals	C _T	-	30	-	pF	V = 0, f = 1 MHz
	Trigger LED forward current	I _{FT}	-	1	3	mA	1a : I _F = 120 mA
		I _{FC}					1b : I _{OFF} = 10 μA
Output	Maximum resistance with output ON	R _{ON}	-	15	25	Ω	1a : I _F = 5 mA, I _O = 120 mA
							1b : I _F = 0 mA, I _O = 120 mA
	Current leakage when the relay is open	I _{LEAK}	-	-	1.0	μA	V _{OFF} = 350 V
	Capacity between terminals	C _{OFF}	-	65	-	pF	(1a) V = 0, f = 1 MHz (1b) V = 0, f = 1 MHz, I _F = 5mA
	Capacity between I/O terminals	C _{I-O}	-	0.8	-	pF	f = 1 MHz, V _S = 0 V
	Insulation resistance between I/O terminals	R _{I-O}	1000	-	-	MΩ	V _{I-O} = 500 VDC, R _{oH} ≤ 60 %
	Turn-ON time	1a	t _{ON}	-	-	1.0	ms
1b		-		-	1.0	ms	
Turn-OFF time	1a	t _{OFF}	-	-	1.0	ms	
	1b		-	-	3.0	ms	

Note: 2. Turn-ON and Turn-OFF Times

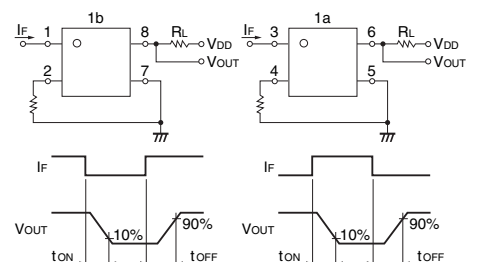

Recommended Operating Conditions


Use the G3VM under the following conditions so that the Relay will operate properly.

Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	V_{DD}	-	-	280	V
Operating LED forward current	I_F	5	-	25	mA
Continuous load current (AC peak/DC)	I_O	-	-	120	mA
Ambient operating temperature	T_a	-20	-	65	°C


Engineering Data

(Common to SPST-NO and SPST-NC contacts)


LED forward current vs. Ambient temperature

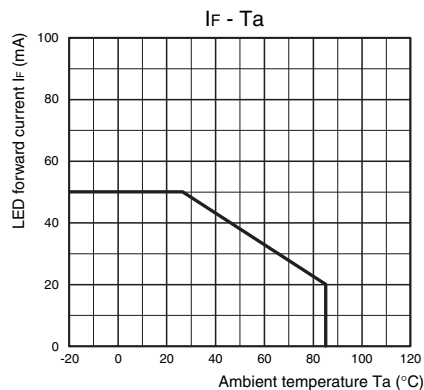

Continuous load current vs. Ambient temperature

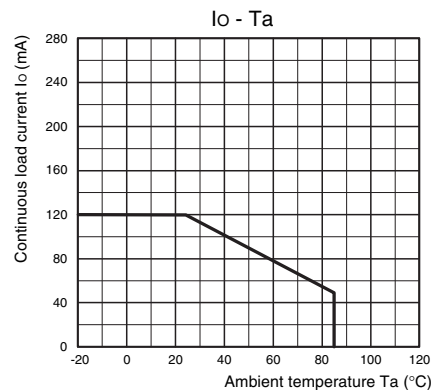


LED forward current vs. LED forward voltage

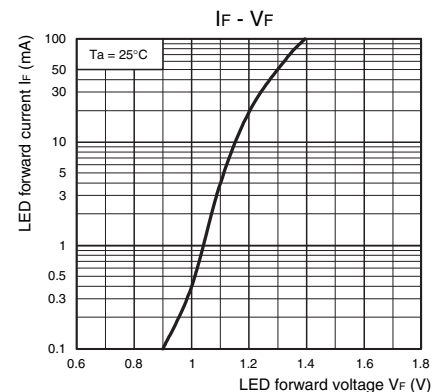


(SPST-NO contacts)


Continuous load current vs. On-state voltage

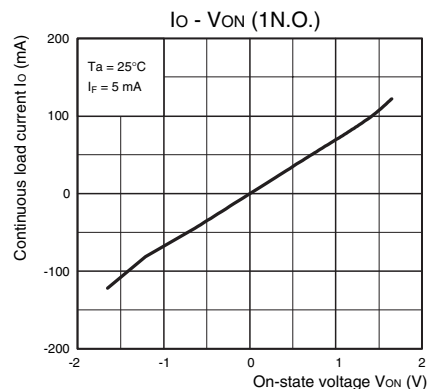


On-state resistance vs. Ambient temperature

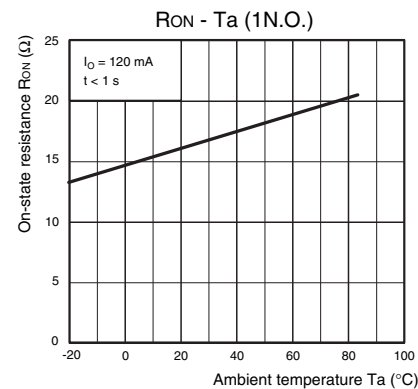


Trigger LED forward current vs. Ambient temperature

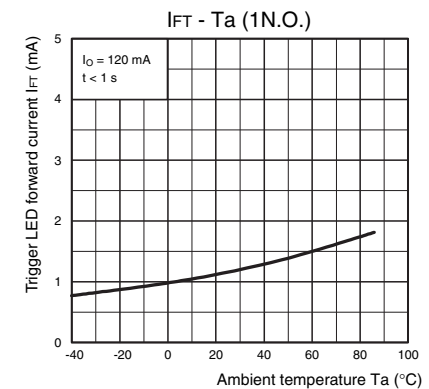


Turn ON, Turn OFF time vs. LED forward current

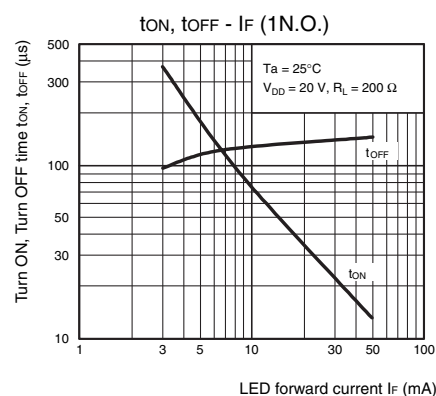

Turn ON, Turn OFF time vs. Ambient temperature

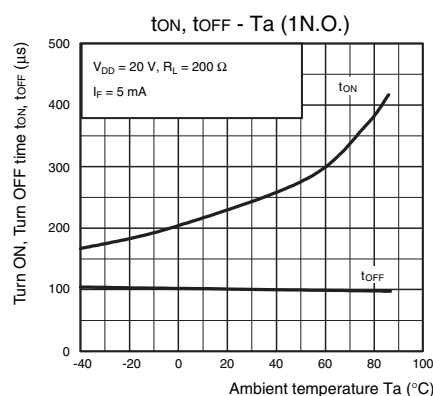


Current leakage vs. Ambient temperature

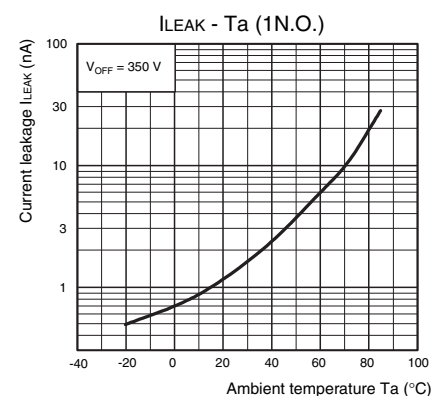


(SPST-NC contacts)


Continuous load current vs. On-state voltage

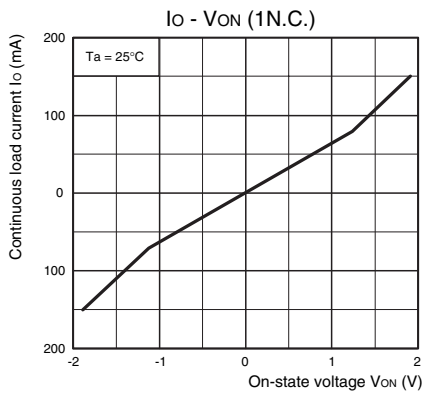


On-state resistance vs. Ambient temperature

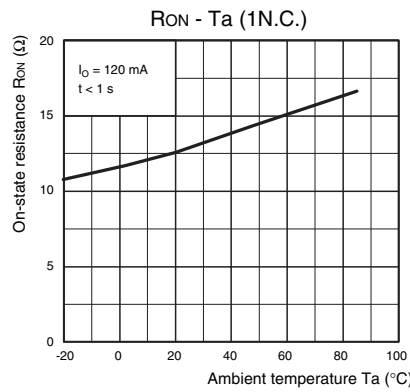


Trigger LED forward current vs. Ambient temperature

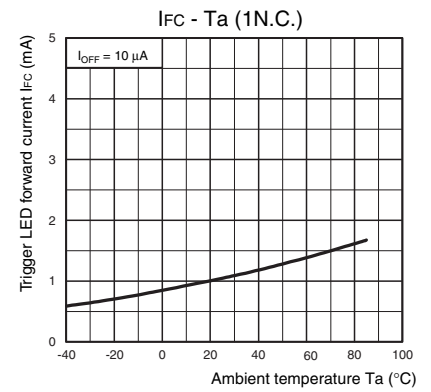


Turn ON, Turn OFF time vs. LED forward current

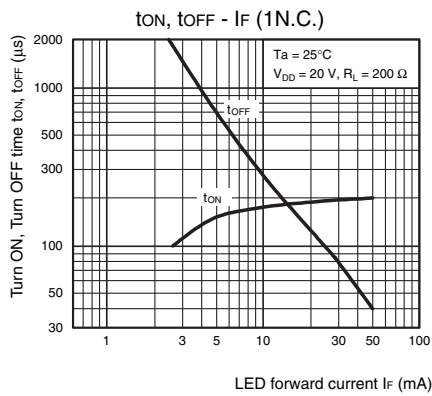

Turn ON, Turn OFF time vs. Ambient temperature

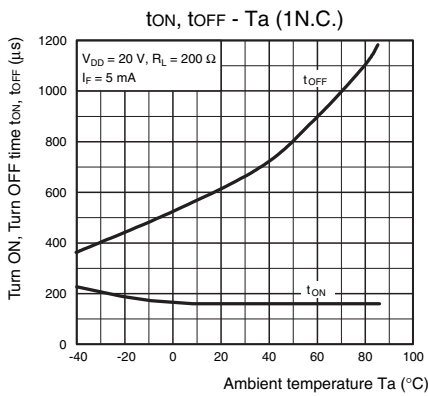

Current leakage vs. Ambient temperature

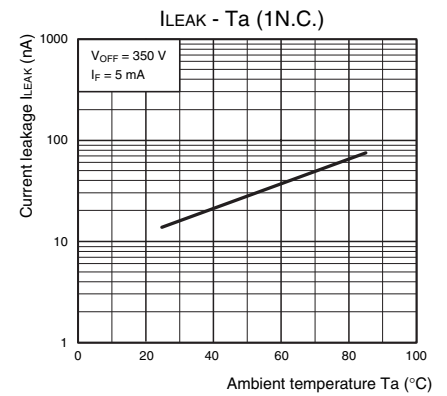


■ Safety Precautions

- Refer to "Common Precautions" for all G3VM models.

■ Appearance


SOP (Small Outline Package) SOP8

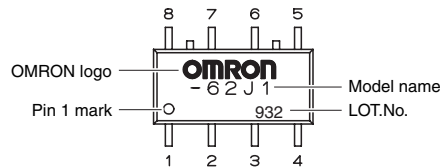

Note: The actual product is marked differently from the image shown here.


■ SOP8

(Unit: mm)




Surface-mounting Terminals

Weight: 0.2 g

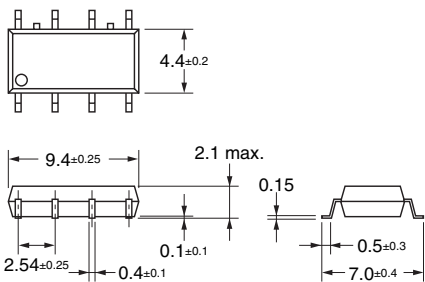

Actual Mounting Pad Dimensions

(Recommended Value, TOP VIEW)



Note: The actual product is marked differently from the image shown here.

- Application examples provided in this document are for reference only. In actual applications, confirm equipment functions and safety before using the product.
- Consult your OMRON representative before using the product under conditions which are not described in the manual or applying the product to nuclear control systems, railroad systems, aviation systems, vehicles, combustion systems, medical equipment, amusement machines, safety equipment, and other systems or equipment that may have a serious influence on lives and property if used improperly. Make sure that the ratings and performance characteristics of the product provide a margin of safety for the system or equipment, and be sure to provide the system or equipment with double safety mechanisms.

Note: Do not use this document to operate the Unit.

OMRON Corporation

ELECTRONIC AND MECHANICAL COMPONENTS COMPANY

Contact: www.omron.com/ecb

Cat. No. K255-E1-01
0413(0413)(O)

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Omron:

G3VM-355JR