

Xtra Long Life
SP6T Switch

MSP6TA-12+

50Ω DC to 12 GHz 24 Volt Absorptive



CASE STYLE: HJ1143

The Big Deal

- Extra long life - 10 million cycles
- Low insertion loss, 0.2 dB
- High isolation, 90 dB typ.
- Absorptive
- Reliable sleep mode switching

Product Overview

Mini-Circuits' MSP6TA-12+ is an ultra-reliable, rugged-duty reflective fail-safe SP6T switch designed in break-before-make configuration offering an ultra long switching life. Powered by +24VDC, the device has a typical switching speed of 20 milliseconds, insertion loss of 0.2 dB and high isolation of 90 dB. The MSP6TA-12+ is suitable for use across a wide range of applications, including switching for automated test equipment and redundancy switching.

Key Features

| Feature | Advantages |
|---|---|
| Extra long service life | Exceptionally long service life improves system reliability and reduces the need to replace switches often, making it ideal for automatic test systems. |
| High isolation, 90 dB typ. | Prevents interference from unwanted signals, ensuring signal integrity and accuracy of testing. |
| Reliable sleep-mode switching | Offers dependable performance even after being set at a fixed position for prolonged periods. Highly-reliable sleep mode switching averts failures due to “wake up,” making it suitable for automatic testing as well as redundancy switching applications. |
| High repeatability between switching cycles | High repeatability of switching cycles ensures reliable performance critical for automated testing and other measurement applications. |



Xtra Long Life SP6T Switch

50Ω DC to 12 GHz 24 Volt Absorptive

Maximum Ratings

| | |
|---|----------------|
| Operating Temperature | -15°C to +45°C |
| Storage Temperature | -15°C to +85°C |
| RF Power | 20W |
| Control Voltage | 26V |
| Permanent damage may occur if any of these limits are exceeded. | |

Features

- ultra-reliable, 10 million cycles
- low insertion loss, 0.2 dB typ.
- high isolation, 90 dB typ.
- break-before-make configuration
- absorptive fail-safe switch
- reliable "sleep-time" switching
- protected by US Patents 5,272,458; 6,414,577; 7,633,361; 7,843,289 and 6,650,210

Applications

- (ATE) automatic test equipment
- redundancy switching for microwave radio

MSP6TA-12+



front view

back view


CASE STYLE: HJ1143

| | |
|------------|------------|
| Connectors | Model |
| SMA | MSP6TA-12+ |

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Outline Drawing

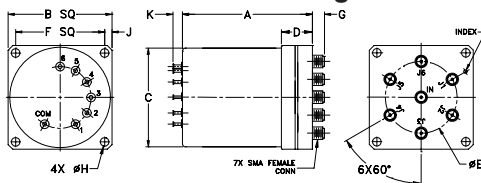

Outline Dimensions (inch/mm)

| | | | | | |
|-------|-------|-------|-------|-------|-------|
| A | B | C | D | E | F |
| 2.63 | 2.10 | 2.00 | .63 | 1.45 | 1.800 |
| 66.80 | 53.34 | 50.80 | 16.00 | 36.83 | 45.72 |
| G | H | J | K | wt | |
| .24 | .172 | .15 | .19 | grams | |
| 6.10 | 4.37 | 3.81 | 4.83 | 230 | |

Marking Drawing

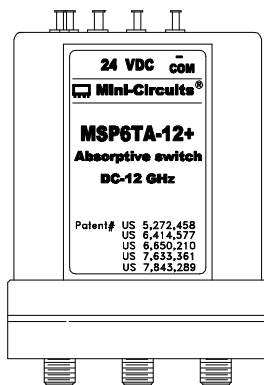

Electrical Specifications at 25°C

| Parameter | Condition | Min. | Typ. (Note 1) | Max. | Unit |
|-------------------------------------|------------|------------|---------------|------|--------|
| Frequency Range | | DC | — | 12 | GHz |
| Insertion Loss | DC - 1 GHz | — | 0.10 | 0.15 | dB |
| | 1 - 6 | — | 0.15 | 0.25 | |
| | 6 - 8 | — | 0.20 | 0.30 | |
| | 8 - 12 | — | 0.25 | 0.45 | |
| Isolation | DC - 1 GHz | 85 | 100 | — | dB |
| | 1 - 6 | 80 | 95 | — | |
| | 6 - 8 | 80 | 90 | — | |
| | 8 - 12 | 80 | 90 | — | |
| VSWR (Note 2,3) | DC - 1 GHz | — | 1.05 | 1.10 | :1 |
| | 1 - 6 | — | 1.20 | 1.25 | |
| | 6 - 8 | — | 1.20 | 1.35 | |
| | 8 - 12 | — | 1.20 | 1.35 | |
| Control Signal (Note 4) | 24V | — | 85 | 125 | mA |
| Switching Lifetime Hot Switching | 0.1W | 10 million | — | — | cycles |
| | 1.0W | — | 1 million | — | |
| RF Power Cold Switching | — | — | — | 20 | W |


Notes

1. The performance values represents a common value for the frequency range. For typical performance across the frequency band, see performance graphs in the next page.
2. All ports, all states
3. For port IN in Energized state only.
4. +24 Volt applied to energized port, COM is negative.

Additional Specifications




| | |
|-------------------------|---------------|
| Operating Voltage Range | 24V (nom) ±1V |
| Switching Time (Typ.) | 20ms |

Switching Position (Non-Energized)

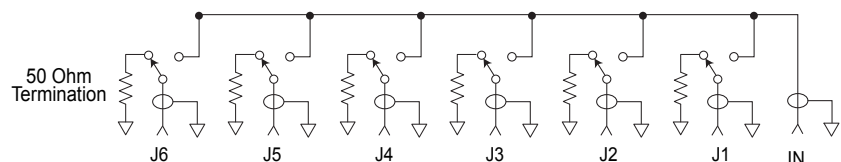

Typical Performance Data

| FREQ. (MHz) | ON INSERTION LOSS (dB) | | | | | | ISOLATION (dB) | | VSWR | | | | | |
|----------------|---------------------------|-------|-------|-------|-------|-------|-------------------|-------|-------|-------|-------|-------|-------|------|
| | IN-J1 | IN-J2 | IN-J3 | IN-J4 | IN-J5 | IN-J6 | IN | J1-ON | J2-ON | J3-ON | J4-ON | J5-ON | J6-ON | |
| 1000 | 0.04 | 0.04 | 0.04 | 0.04 | 0.04 | 0.04 | 99.41 | 1.03 | 1.03 | 1.03 | 1.04 | 1.05 | 1.04 | 1.04 |
| 1800 | 0.06 | 0.06 | 0.06 | 0.06 | 0.06 | 0.06 | 108.37 | 1.04 | 1.04 | 1.05 | 1.05 | 1.07 | 1.05 | 1.05 |
| 2500 | 0.07 | 0.07 | 0.07 | 0.07 | 0.06 | 0.06 | 113.94 | 1.03 | 1.04 | 1.04 | 1.05 | 1.07 | 1.05 | 1.06 |
| 3800 | 0.09 | 0.09 | 0.08 | 0.07 | 0.07 | 0.07 | 112.01 | 1.02 | 1.02 | 1.01 | 1.02 | 1.04 | 1.03 | 1.03 |
| 4550 | 0.10 | 0.09 | 0.09 | 0.09 | 0.08 | 0.08 | 105.44 | 1.02 | 1.02 | 1.01 | 1.02 | 1.04 | 1.03 | 1.03 |
| 5500 | 0.10 | 0.10 | 0.10 | 0.09 | 0.10 | 0.10 | 118.76 | 1.05 | 1.03 | 1.05 | 1.05 | 1.08 | 1.05 | 1.06 |
| 6000 | 0.11 | 0.11 | 0.10 | 0.10 | 0.11 | 0.10 | 109.45 | 1.07 | 1.06 | 1.07 | 1.07 | 1.11 | 1.08 | 1.09 |
| 7000 | 0.13 | 0.13 | 0.13 | 0.13 | 0.12 | 0.12 | 102.15 | 1.13 | 1.11 | 1.13 | 1.13 | 1.18 | 1.13 | 1.14 |
| 7500 | 0.14 | 0.14 | 0.14 | 0.14 | 0.13 | 0.13 | 96.47 | 1.15 | 1.13 | 1.15 | 1.16 | 1.20 | 1.15 | 1.16 |
| 9000 | 0.16 | 0.15 | 0.16 | 0.16 | 0.15 | 0.15 | 101.34 | 1.15 | 1.15 | 1.14 | 1.18 | 1.21 | 1.17 | 1.19 |
| 10000 | 0.16 | 0.15 | 0.16 | 0.15 | 0.16 | 0.16 | 93.14 | 1.13 | 1.14 | 1.11 | 1.16 | 1.18 | 1.16 | 1.18 |
| 11000 | 0.16 | 0.16 | 0.16 | 0.15 | 0.15 | 0.15 | 91.84 | 1.10 | 1.11 | 1.06 | 1.11 | 1.14 | 1.14 | 1.14 |
| 12000 | 0.16 | 0.16 | 0.16 | 0.14 | 0.15 | 0.15 | 95.49 | 1.04 | 1.05 | 1.00 | 1.05 | 1.05 | 1.08 | 1.06 |
| 13005 | 0.18 | 0.19 | 0.18 | 0.15 | 0.16 | 0.17 | 92.38 | 1.05 | 1.06 | 1.09 | 1.09 | 1.08 | 1.05 | 1.08 |
| 15000 | 0.32 | 0.33 | 0.32 | 0.26 | 0.27 | 0.27 | 99.05 | 1.39 | 1.38 | 1.46 | 1.38 | 1.33 | 1.35 | 1.34 |

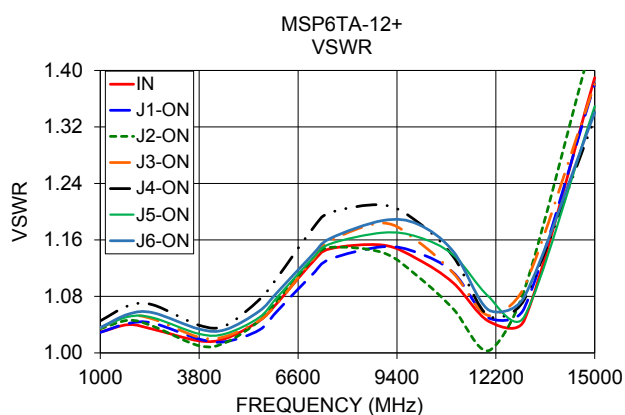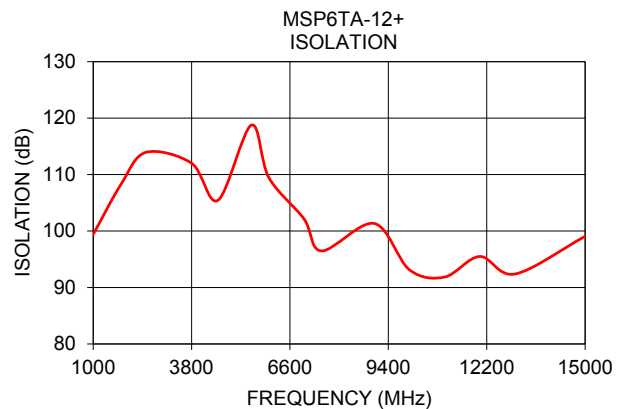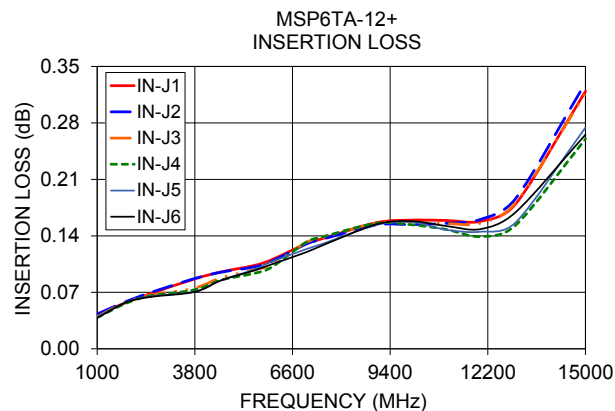

Additional Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[MSP6TA-12+](#)